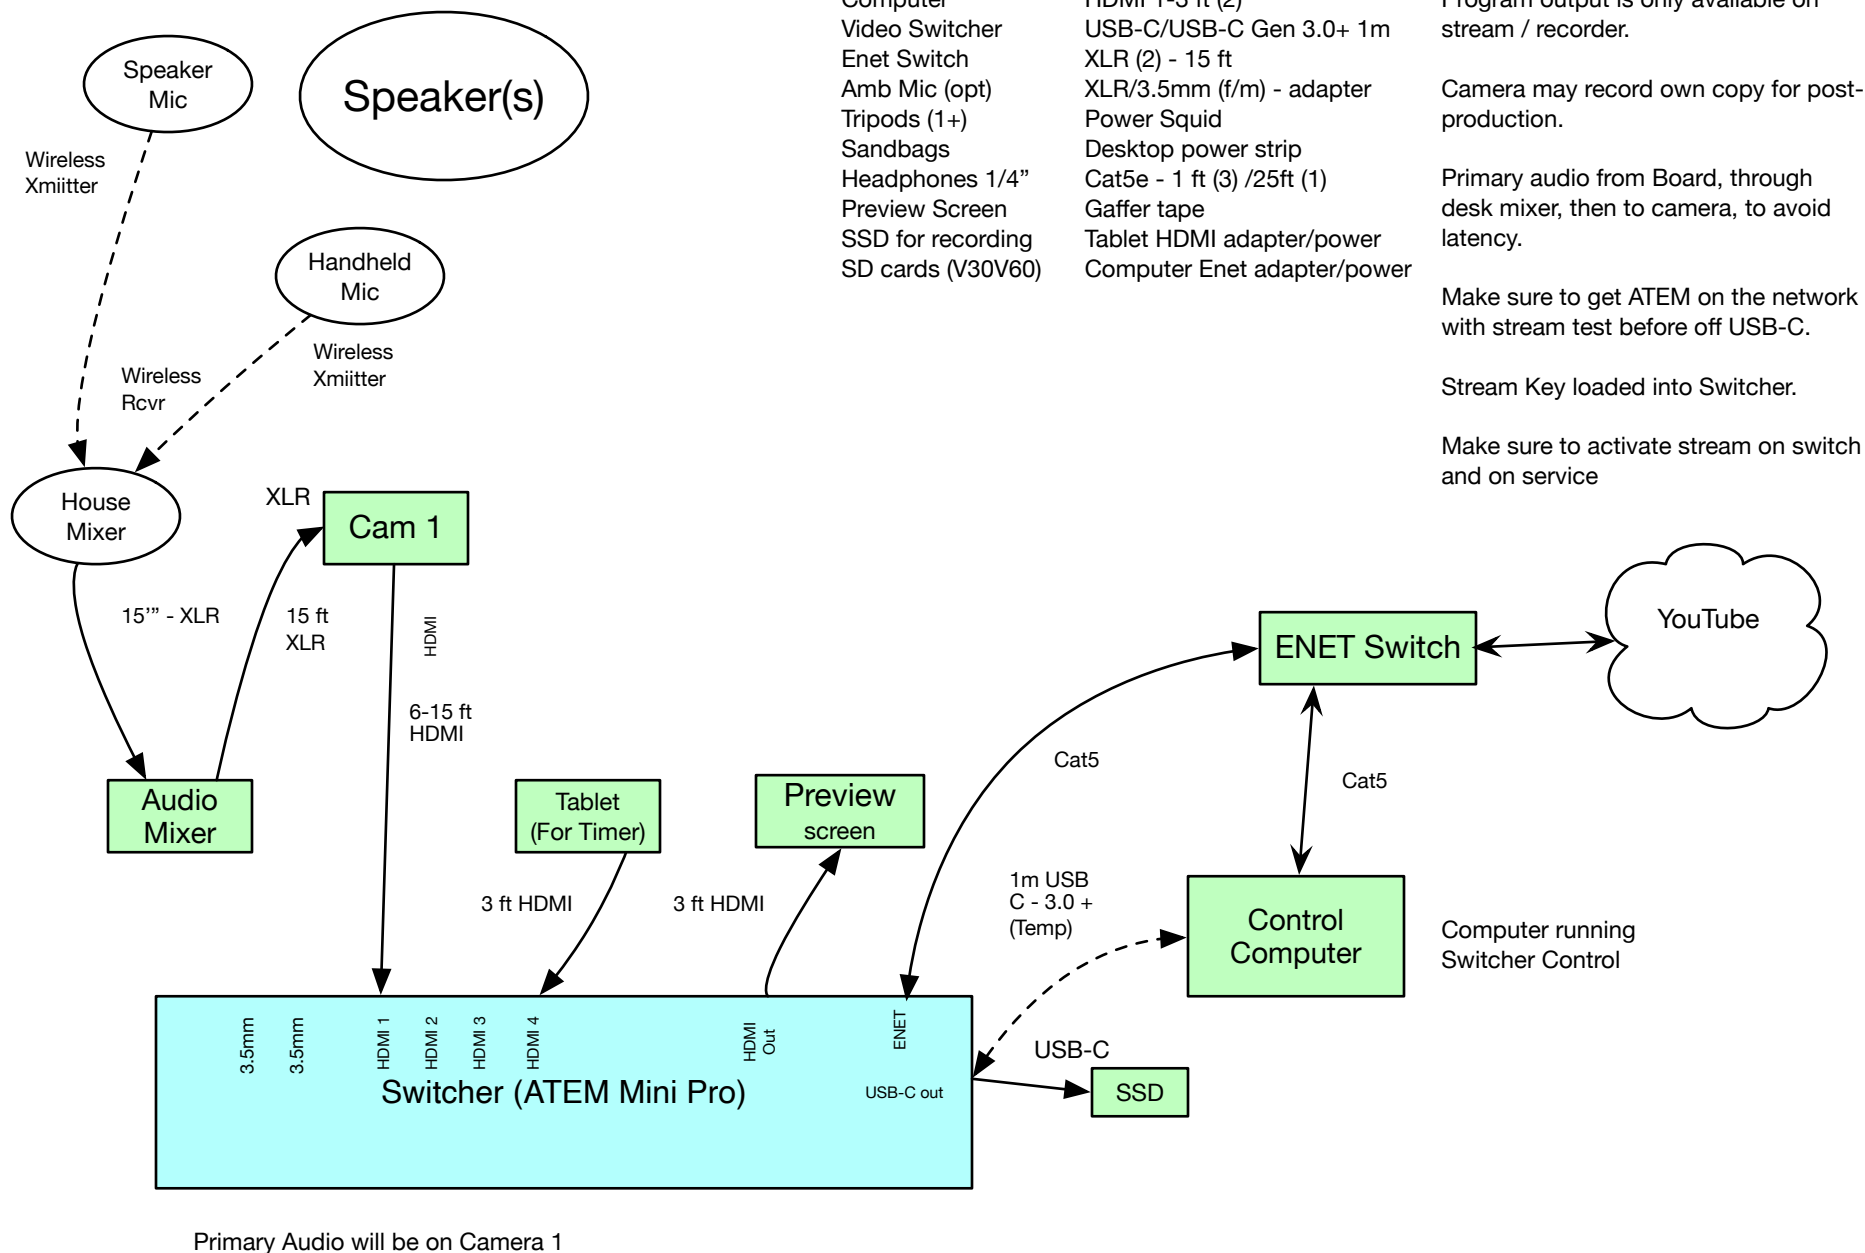Great Room Single speaker Record and Stream

Cam 1 + lenses
Computer
Video Switcher
Enet Switch
Amb Mic (opt)
Tripods (1+)
Sandbags
Headphones 1/4"
Preview Screen
SSD for recording
SD cards (V30V60)

HDMI - 6+ft (1) 15+ (1)
HDMI 1-3 ft (2)
USB-C/USB-C Gen 3.0+ 1m
XLR (2) - 15 ft
XLR/3.5mm (f/m) - adapter
Power Squid
Desktop power strip
Cat5e - 1 ft (3) /25ft (1)
Gaffer tape
Tablet HDMI adapter/power
Computer Enet adapter/power

Switch output multi-view monitor
Program output is only available on
stream / recorder.

Camera may record own copy for post-
production.

Primary audio from Board, through
desk mixer, then to camera, to avoid
latency.

Make sure to get ATEM on the network
with stream test before off USB-C.

Stream Key loaded into Switcher.

Make sure to activate stream on switch
and on service

Speaker Mic

Speaker(s)

Handheld Mic

Wireless Xmiitter

Wireless Xmiitter

Wireless Rcvr

House Mixer

XLR

Cam 1

15'" - XLR

15 ft XLR

HDMI

6-15 ft HDMI

Audio Mixer

Tablet (For Timer)

Preview screen

ENET Switch

YouTube

Cat5

Cat5

3 ft HDMI

3 ft HDMI

1m USB C - 3.0 + (Temp)

Control Computer

Computer running
Switcher Control

3.5mm 3.5mm HDMI 1 HDMI 2 HDMI 3 HDMI 4   HDMI Out   ENET

Switcher (ATEM Mini Pro)

USB-C out

USB-C

SSD

Primary Audio will be on Camera 1