

Precision Metal Film Fixed Resistor Axial Leaded



Features


- EIA standard colour-coding
- Non-Flame type available
- Low noise and voltage coefficient
- Low temperature coefficient range
- Wide precision range in small package
- Too low or too high ohmic value can be supplied on a case to case basis
- Nichrome resistor element provides stable performance in various environments
- Multiple epoxy coating on vacuum-deposited metal film provides superior moisture protection

Performance Specification

Temperature Coefficient	: Within the maximum temperature coefficient specified.
Short Time Overload	: $\pm(0.5\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.
Insulation Resistance	: Min. 1,000M Ω
Dielectric Withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Pulse Overload	: $\pm(1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.
Terminal Strength	: No evidence of mechanical damage.
Resistance to Soldering Heat	: $\pm(1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.
Solderability	: Min. 95% coverage
Resistance to Solvent	: No deterioration of protective coating and markings
Temperature Cycling	: $\pm(1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.
Humidity (Steady state)	: $\pm(2\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.
Load Life in Humidity	: Normal Type : $\pm(1.5\% + 0.05\Omega)$ Max. Non-Flame Type : $\pm(5\% + 0.05\Omega)$ Max.
Load Life	: Normal Type : $\pm(1.5\% + 0.05\Omega)$ Max. Non-Flame Type : $\pm(5\% + 0.05\Omega)$ Max.

Precision Metal Film Fixed Resistor

Axial Leaded

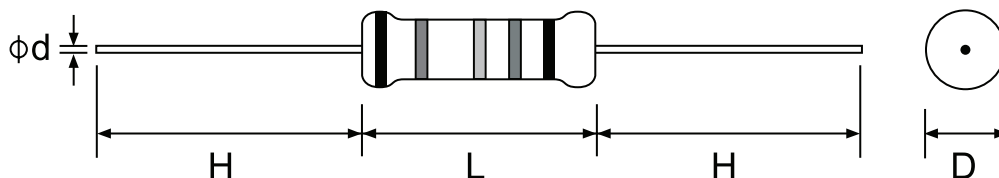

Style	Power Rating at +70°C	Dimension (mm)				
		D Max.	LMax.	H ±3	d ±0.05	PT
MF12	1/8W (125mW)	1.85	3.5	28	0.45	52
MF25	1/4W (250mW)	2.5	6.8		0.54*	
MF50	1/2W (500mW)	3.5	10		0.54	

Note:


*Lead diameter of MCMF0W4 series can be provided in 0.5mm, 0.54mm and 0.6mm.

Specification Table


Style	Dielectric Withstanding Voltage (V)	Max. Working Voltage (V)	Max. Overload Voltage (V)	Resistance Tolerance	Temperature Coefficient	Resistance Range
MF12	400	200	400	±1%	±50ppm / °C	1Ω to 1MΩ
MF25	500	250	500			
MF50	700	350	700			

Dimensions : Millimetres

Derating Curve

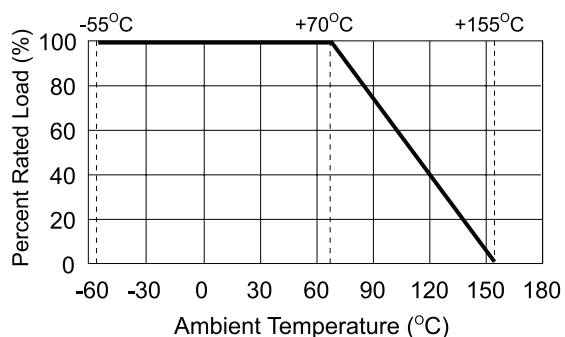

Derating Curve

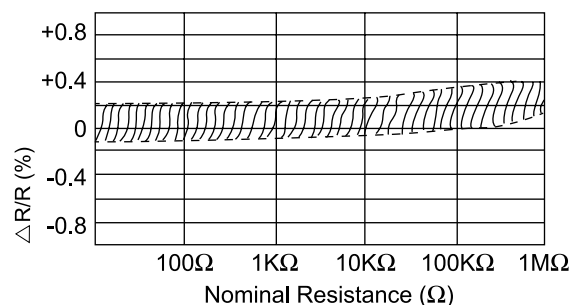


Precision Metal Film Fixed Resistor

Axial Leaded



Current Noise Level

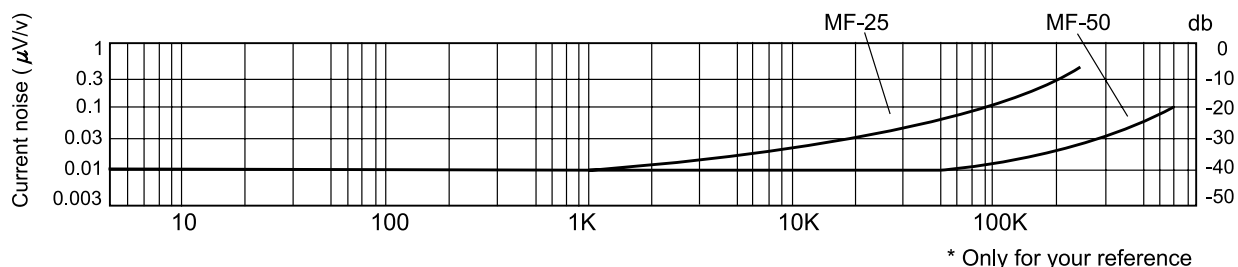

Part Number Table

Description	Part Number
Resistor, 100R, 250mW 0.5% 50PPM	MCMF0W4DF1000A50
Resistor, 1K0, 250mW 0.5% 50PPM	MCMF0W4DF1001A50
Resistor, 10K0, 250mW 0.5% 50PPM	MCMF0W4DF1002A50
Resistor, 100K, 250mW, 0.5%	MCMF0W4DF1003A50
Resistor, 1K05, 250mW 0.5% 50PPM	MCMF0W4DF1051A50
Resistor, 10K5, 250mW 0.5% 50PPM	MCMF0W4DF1052A50
Resistor, 105K, 250mW 0.5% 50PPM	MCMF0W4DF1053A50
Resistor, 110R, 250mW 0.5% 50PPM	MCMF0W4DF1100A50
Resistor, 1K10, 250mW 0.5% 50PPM	MCMF0W4DF1101A50
Resistor, 11K0, 250mW 0.5% 50PPM	MCMF0W4DF1102A50
Resistor, 110K, 250mW 0.5% 50PPM	MCMF0W4DF1103A50
Resistor, 1K15, 250mW 0.5% 50PPM	MCMF0W4DF1151A50
Resistor, 11K5, 250mW 0.5% 50PPM	MCMF0W4DF1152A50
Resistor, 115K, 250mW 0.5% 50PPM	MCMF0W4DF1153A50
Resistor, 121R, 250mW 0.5% 50PPM	MCMF0W4DF1210A50
Resistor, 1K21, 250mW 0.5% 50PPM	MCMF0W4DF1211A50
Resistor, 12K1, 250mW 0.5% 50PPM	MCMF0W4DF1212A50
Resistor, 121K, 250mW 0.5% 50PPM	MCMF0W4DF1213A50
Resistor, 127R, 250mW 0.5% 50PPM	MCMF0W4DF1270A50
Resistor, 1K27, 250mW 0.5% 50PPM	MCMF0W4DF1271A50
Resistor, 127K, 250mW 0.5% 50PPM	MCMF0W4DF1273A50
Resistor, 133R, 250mW 0.5% 50PPM	MCMF0W4DF1330A50
Resistor, 1K33, 250mW 0.5% 50PPM	MCMF0W4DF1331A50
Resistor, 13K3, 250mW 0.5% 50PPM	MCMF0W4DF1332A50
Resistor, 133K, 250mW 0.5% 50PPM	MCMF0W4DF1333A50
Resistor, 140R, 250mW 0.5% 50PPM	MCMF0W4DF1400A50

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 1K40, 250mW 0.5% 50PPM	MCMF0W4DF1401A50
Resistor, 14K0, 250mW 0.5% 50PPM	MCMF0W4DF1402A50
Resistor, 140K, 250mW 0.5% 50PPM	MCMF0W4DF1403A50
Resistor, 1K47, 250mW 0.5% 50PPM	MCMF0W4DF1471A50
Resistor, 14K7, 250mW 0.5% 50PPM	MCMF0W4DF1472A50
Resistor, 154R, 250mW 0.5% 50PPM	MCMF0W4DF1540A50
Resistor, 1K54, 250mW 0.5% 50PPM	MCMF0W4DF1541A50
Resistor, 15K4, 250mW 0.5% 50PPM	MCMF0W4DF1542A50
Resistor, 154K, 250mW 0.5% 50PPM	MCMF0W4DF1543A50
Resistor, 162R, 250mW 0.5% 50PPM	MCMF0W4DF1620A50
Resistor, 1K62, 250mW 0.5% 50PPM	MCMF0W4DF1621A50
Resistor, 16K2, 250mW 0.5% 50PPM	MCMF0W4DF1622A50
Resistor, 162K, 250mW 0.5% 50PPM	MCMF0W4DF1623A50
Resistor, 16K5, 250mW 0.5% 50PPM	MCMF0W4DF1652A50
Resistor, 169R, 250mW 0.5% 50PPM	MCMF0W4DF1690A50
Resistor, 1K69, 250mW 0.5% 50PPM	MCMF0W4DF1691A50
Resistor, 16K9, 250mW 0.5% 50PPM	MCMF0W4DF1692A50
Resistor, 169K, 250mW 0.5% 50PPM	MCMF0W4DF1693A50
Resistor, 178R, 250mW 0.5% 50PPM	MCMF0W4DF1780A50
Resistor, 1K78, 250mW 0.5% 50PPM	MCMF0W4DF1781A50
Resistor, 17K8, 250mW 0.5% 50PPM	MCMF0W4DF1782A50
Resistor, 178K, 250mW 0.5% 50PPM	MCMF0W4DF1783A50
Resistor, 187R, 250mW 0.5% 50PPM	MCMF0W4DF1870A50
Resistor, 1K87, 250mW 0.5% 50PPM	MCMF0W4DF1871A50
Resistor, 18K7, 250mW 0.5% 50PPM	MCMF0W4DF1872A50
Resistor, 187K, 250mW 0.5% 50PPM	MCMF0W4DF1873A50
Resistor, 196R, 250mW 0.5% 50PPM	MCMF0W4DF1960A50
Resistor, 19K6, 250mW 0.5% 50PPM	MCMF0W4DF1962A50
Resistor, 196K, 250mW 0.5% 50PPM	MCMF0W4DF1963A50
Resistor, 205R, 250mW 0.5% 50PPM	MCMF0W4DF2050A50
Resistor, 2K05, 250mW 0.5% 50PPM	MCMF0W4DF2051A50
Resistor, 20K5, 250mW 0.5% 50PPM	MCMF0W4DF2052A50
Resistor, 205K, 250mW 0.5% 50PPM	MCMF0W4DF2053A50
Resistor, 215R, 250mW 0.5% 50PPM	MCMF0W4DF2150A50
Resistor, 2K15, 250mW 0.5% 50PPM	MCMF0W4DF2151A50
Resistor, 21K5, 250mW 0.5% 50PPM	MCMF0W4DF2152A50
Resistor, 215K, 250mW 0.5% 50PPM	MCMF0W4DF2153A50

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 226R, 250mW 0.5% 50PPM	MCMF0W4DF2260A50
Resistor, 2K26, 250mW 0.5% 50PPM	MCMF0W4DF2261A50
Resistor, 22K6, 250mW 0.5% 50PPM	MCMF0W4DF2262A50
Resistor, 226K, 250mW 0.5% 50PPM	MCMF0W4DF2263A50
Resistor, 237R, 250mW 0.5% 50PPM	MCMF0W4DF2370A50
Resistor, 2K37, 250mW 0.5% 50PPM	MCMF0W4DF2371A50
Resistor, 23K7, 250mW 0.5% 50PPM	MCMF0W4DF2372A50
Resistor, 237K, 250mW 0.5% 50PPM	MCMF0W4DF2373A50
Resistor, 249R, 250mW 0.5% 50PPM	MCMF0W4DF2490A50
Resistor, 2K49, 250mW 0.5% 50PPM	MCMF0W4DF2491A50
Resistor, 24K9, 250mW 0.5% 50PPM	MCMF0W4DF2492A50
Resistor, 249K, 250mW 0.5% 50PPM	MCMF0W4DF2493A50
Resistor, 261R, 250mW 0.5% 50PPM	MCMF0W4DF2610A50
Resistor, 2K61, 250mW 0.5% 50PPM	MCMF0W4DF2611A50
Resistor, 26K1, 250mW 0.5% 50PPM	MCMF0W4DF2612A50
Resistor, 261K, 250mW 0.5% 50PPM	MCMF0W4DF2613A50
Resistor, 26R1, 250mW 0.5% 50PPM	MCMF0W4DF261JA50
Resistor, 274R, 250mW 0.5% 50PPM	MCMF0W4DF2740A50
Resistor, 2K74, 250mW 0.5% 50PPM	MCMF0W4DF2741A50
Resistor, 27K4, 250mW 0.5% 50PPM	MCMF0W4DF2742A50
Resistor, 274K, 250mW 0.5% 50PPM	MCMF0W4DF2743A50
Resistor, 27R7, 250mW 0.5% 50PPM	MCMF0W4DF277JA50
Resistor, 287R, 250mW 0.5% 50PPM	MCMF0W4DF2870A50
Resistor, 2K87, 250mW 0.5% 50PPM	MCMF0W4DF2871A50
Resistor, 28K7, 250mW 0.5% 50PPM	MCMF0W4DF2872A50
Resistor, 287K, 250mW 0.5% 50PPM	MCMF0W4DF2873A50
Resistor, 28R7, 250mW 0.5% 50PPM	MCMF0W4DF287JA50
Resistor, 301R, 250mW 0.5% 50PPM	MCMF0W4DF3010A50
Resistor, 3K01, 250mW 0.5% 50PPM	MCMF0W4DF3011A50
Resistor, 30K1, 250mW 0.5% 50PPM	MCMF0W4DF3012A50
Resistor, 301K, 250mW 0.5% 50PPM	MCMF0W4DF3013A50
Resistor, 30R1, 250mW 0.5% 50PPM	MCMF0W4DF301JA50
Resistor, 316R, 250mW 0.5% 50PPM	MCMF0W4DF3160A50
Resistor, 3K16, 250mW 0.5% 50PPM	MCMF0W4DF3161A50
Resistor, 31K6, 250mW 0.5% 50PPM	MCMF0W4DF3162A50
Resistor, 316K, 250mW 0.5% 50PPM	MCMF0W4DF3163A50
Resistor, 31R6, 250mW 0.5% 50PPM	MCMF0W4DF316JA50

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 332R, 250mW 0.5% 50PPM	MCMF0W4DF3320A50
Resistor, 3K32, 250mW 0.5% 50PPM	MCMF0W4DF3321A50
Resistor, 33K2, 250mW 0.5% 50PPM	MCMF0W4DF3322A50
Resistor, 332K, 250mW 0.5% 50PPM	MCMF0W4DF3323A50
Resistor, 33R2, 250mW 0.5% 50PPM	MCMF0W4DF332JA50
Resistor, 348R, 250mW 0.5% 50PPM	MCMF0W4DF3480A50
Resistor, 3K48, 250mW 0.5% 50PPM	MCMF0W4DF3481A50
Resistor, 34K8, 250mW 0.5% 50PPM	MCMF0W4DF3482A50
Resistor, 348K, 250mW 0.5% 50PPM	MCMF0W4DF3483A50
Resistor, 34R8, 250mW 0.5% 50PPM	MCMF0W4DF348JA50
Resistor, 365R, 250mW 0.5% 50PPM	MCMF0W4DF3650A50
Resistor, 3K65, 250mW 0.5% 50PPM	MCMF0W4DF3651A50
Resistor, 36K5, 250mW 0.5% 50PPM	MCMF0W4DF3652A50
Resistor, 36R5, 250mW 0.5% 50PPM	MCMF0W4DF365JA50
Resistor, 383R, 250mW 0.5% 50PPM	MCMF0W4DF3830A50
Resistor, 3K83, 250mW 0.5% 50PPM	MCMF0W4DF3831A50
Resistor, 38K3, 250mW 0.5% 50PPM	MCMF0W4DF3832A50
Resistor, 38R3, 250mW 0.5% 50PPM	MCMF0W4DF383JA50
Resistor, 402R, 250mW 0.5% 50PPM	MCMF0W4DF4020A50
Resistor, 4K02, 250mW 0.5% 50PPM	MCMF0W4DF4021A50
Resistor, 40K2, 250mW 0.5% 50PPM	MCMF0W4DF4022A50
Resistor, 40R2, 250mW 0.5% 50PPM	MCMF0W4DF402JA50
Resistor, 422R, 250mW 0.5% 50PPM	MCMF0W4DF4220A50
Resistor, 42K2, 250mW 0.5% 50PPM	MCMF0W4DF4222A50
Resistor, 42R2, 250mW 0.5% 50PPM	MCMF0W4DF422JA50
Resistor, 442R, 250mW 0.5% 50PPM	MCMF0W4DF4420A50
Resistor, 4K42, 250mW 0.5% 50PPM	MCMF0W4DF4421A50
Resistor, 44K2, 250mW 0.5% 50PPM	MCMF0W4DF4422A50
Resistor, 44R2, 250mW 0.5% 50PPM	MCMF0W4DF442JA50
Resistor, 464R, 250mW 0.5% 50PPM	MCMF0W4DF4640A50
Resistor, 4K64, 250mW 0.5% 50PPM	MCMF0W4DF4641A50
Resistor, 46K4, 250mW 0.5% 50PPM	MCMF0W4DF4642A50
Resistor, 46R4, 250mW 0.5% 50PPM	MCMF0W4DF464JA50
Resistor, 487R, 250mW 0.5% 50PPM	MCMF0W4DF4870A50
Resistor, 4K87, 250mW 0.5% 50PPM	MCMF0W4DF4871A50
Resistor, 48K7, 250mW 0.5% 50PPM	MCMF0W4DF4872A50
Resistor, 48R7, 250mW 0.5% 50PPM	MCMF0W4DF487JA50

Precision Metal Film Fixed Resistor

Axial Leaded



Description	Part Number
Resistor, 5K11, 250mW 0.5% 50PPM	MCMF0W4DF5111A50
Resistor, 51K1, 250mW 0.5% 50PPM	MCMF0W4DF5112A50
Resistor, 51R1, 250mW 0.5% 50PPM	MCMF0W4DF511JA50
Resistor, 536R, 250mW 0.5% 50PPM	MCMF0W4DF5360A50
Resistor, 5K36, 250mW 0.5% 50PPM	MCMF0W4DF5361A50
Resistor, 53K6, 250mW 0.5% 50PPM	MCMF0W4DF5362A50
Resistor, 53R6, 250mW 0.5% 50PPM	MCMF0W4DF536JA50
Resistor, 562R, 250mW 0.5% 50PPM	MCMF0W4DF5620A50
Resistor, 5K62, 250mW 0.5% 50PPM	MCMF0W4DF5621A50
Resistor, 56K2, 250mW 0.5% 50PPM	MCMF0W4DF5622A50
Resistor, 56R2, 250mW 0.5% 50PPM	MCMF0W4DF562JA50
Resistor, 590R, 250mW 0.5% 50PPM	MCMF0W4DF5900A50
Resistor, 5K90, 250mW 0.5% 50PPM	MCMF0W4DF5901A50
Resistor, 59K, 250mW 0.5% 50PPM	MCMF0W4DF5902A50
Resistor, 59R0, 250mW 0.5% 50PPM	MCMF0W4DF590JA50
Resistor, 619R, 250mW 0.5% 50PPM	MCMF0W4DF6190A50
Resistor, 6K19, 250mW 0.5% 50PPM	MCMF0W4DF6191A50
Resistor, 61K9, 250mW 0.5% 50PPM	MCMF0W4DF6192A50
Resistor, 649R, 250mW 0.5% 50PPM	MCMF0W4DF6490A50
Resistor, 64K9, 250mW 0.5% 50PPM	MCMF0W4DF6492A50
Resistor, 64R9, 250mW 0.5% 50PPM	MCMF0W4DF649JA50
Resistor, 681R, 250mW 0.5% 50PPM	MCMF0W4DF6810A50
Resistor, 6K81, 250mW 0.5% 50PPM	MCMF0W4DF6811A50
Resistor, 68K1, 250mW 0.5% 50PPM	MCMF0W4DF6812A50
Resistor, 68R1, 250mW 0.5% 50PPM	MCMF0W4DF681JA50
Resistor, 715R, 250mW 0.5% 50PPM	MCMF0W4DF7150A50
Resistor, 7K15, 250mW 0.5% 50PPM	MCMF0W4DF7151A50
Resistor, 71K5, 250mW 0.5% 50PPM	MCMF0W4DF7152A50
Resistor, 750R, 250mW 0.5% 50PPM	MCMF0W4DF7500A50
Resistor, 7K5, 250mW 0.5% 50PPM	MCMF0W4DF7501A50
Resistor, 75K, 250mW 0.5% 50PPM	MCMF0W4DF7502A50
Resistor, 75R0, 250mW 0.5% 50PPM	MCMF0W4DF750JA50
Resistor, 7K87, 250mW 0.5% 50PPM	MCMF0W4DF7871A50
Resistor, 78K7, 250mW 0.5% 50PPM	MCMF0W4DF7872A50
Resistor, 825R, 250mW 0.5% 50PPM	MCMF0W4DF8250A50
Resistor, 8K25, 250mW 0.5% 50PPM	MCMF0W4DF8251A50
Resistor, 82K5, 250mW 0.5% 50PPM	MCMF0W4DF8252A50

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 82R5, 250mW 0.5% 50PPM	MCMF0W4DF825JA50
Resistor, 866R, 250mW 0.5% 50PPM	MCMF0W4DF8660A50
Resistor, 8K66, 250mW 0.5% 50PPM	MCMF0W4DF8661A50
Resistor, 86K6, 250mW 0.5% 50PPM	MCMF0W4DF8662A50
Resistor, 86R6, 250mW 0.5% 50PPM	MCMF0W4DF866JA50
Resistor, 909R, 250mW 0.5% 50PPM	MCMF0W4DF9090A50
Resistor, 9K09, 250mW 0.5% 50PPM	MCMF0W4DF9091A50
Resistor, 90K9, 250mW 0.5% 50PPM	MCMF0W4DF9092A50
Resistor, 90R9, 250mW 0.5% 50PPM	MCMF0W4DF909JA50
Resistor, 953R, 250mW 0.5% 50PPM	MCMF0W4DF9530A50
Resistor, 9K53, 250mW 0.5% 50PPM	MCMF0W4DF9531A50
Resistor, 95K3, 250mW 0.5% 50PPM	MCMF0W4DF9532A50
Resistor, 95R3, 250mW 0.5% 50PPM	MCMF0W4DF953JA50
Resistor, 511R, 250mW 0.5% 50PPM	MCMF0W4DFA511050
Resistor, 125mW, 1%, 100K	MF12 100K
Resistor, 125mW, 1%, 100K	MF12 100K.
Resistor, 125mW, 1%, 100R	MF12 100R
Resistor, 125mW, 1%, 10K	MF12 10K
Resistor, 125mW 1% 10R	MF12 10R
Resistor, 125mW 1% 110K	MF12 110K
Resistor, 125mW 1% 110R	MF12 110R
Resistor, 125mW 1% 11K	MF12 11K
Resistor, 125mW 1% 11K	MF12 11K.
Resistor, 125mW 1% 11R	MF12 11R
Resistor, 125mW 1% 120K	MF12 120K
Resistor, 125mW 1% 120R	MF12 120R
Resistor, 125mW 1% 12K	MF12 12K
Resistor, 125mW 1% 12R	MF12 12R
Resistor, 125mW 1% 130K	MF12 130K
Resistor, 125mW 1% 130R	MF12 130R
Resistor, 125mW 1% 130R	MF12 130R.
Resistor, 125mW 1% 13K	MF12 13K
Resistor, 125mW 1% 13K	MF12 13K.
Resistor, 125mW 1% 13R	MF12 13R
Resistor, 125mW 1% 150K	MF12 150K
Resistor, 125mW 1% 150R	MF12 150R
Resistor, 125mW 1% 150R	MF12 150R.

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 125mW 1% 15K	MF12 15K
Resistor, 125mW 1% 15R	MF12 15R
Resistor, 125mW 1% 160K	MF12 160K
Resistor, 125mW 1% 160R	MF12 160R
Resistor, 125mW 1% 16K	MF12 16K
Resistor, 125mW 1% 16R	MF12 16R
Resistor, 125mW 1% 180K	MF12 180K
Resistor, 125mW 1% 180R	MF12 180R
Resistor, 125mW 1% 18K	MF12 18K
Resistor, 125mW 1% 18R	MF12 18R
Resistor, 1K, 125mW, 1%	MF12 1K
Resistor, 125mW 1% 1K1	MF12 1K1
Resistor, 125mW 1% 1K2	MF12 1K2
Resistor, 125mW 1% 1K3	MF12 1K3
Resistor, 125mW, 1%, 1K5	MF12 1K5
Resistor, 125mW 1% 1K5	MF12 1K5.
Resistor, 125mW 1% 1K6	MF12 1K6
Resistor, 125mW 1% 1K8	MF12 1K8
Resistor, 1MR, 125mW, 1%	MF12 1M
Resistor, 125mW 1% 1R	MF12 1R
Resistor, 125mW 1% 1R	MF12 1R.
Resistor, 125mW 1% 1R5	MF12 1R5
Resistor, 125mW 1% 200K	MF12 200K
Resistor, 125mW 1% 200R	MF12 200R
Resistor, 125mW 1% 20K	MF12 20K
Resistor, 125mW 1% 20R	MF12 20R
Resistor, 125mW 1% 220K	MF12 220K
Resistor, 125mW, 1%, 220R	MF12 220R
Resistor, 125mW, 1%, 22K	MF12 22K
Resistor, 125mW 1% 22K	MF12 22K.
Resistor, 125mW 1% 22R	MF12 22R
Resistor, 125mW 1% 22R	MF12 22R.
Resistor, 125mW 1% 240K	MF12 240K
Resistor, 125mW 1% 240R	MF12 240R
Resistor, 125mW 1% 24K	MF12 24K
Resistor, 125mW 1% 24R	MF12 24R
Resistor, 125mW 1% 24R	MF12 24R.

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 125mW 1% 270K	MF12 270K
Resistor, 125mW 1% 270R	MF12 270R
Resistor, 125mW 1% 27K	MF12 27K
Resistor, 125mW 1% 27K	MF12 27K.
Resistor, 125mW 1% 27R	MF12 27R
Resistor, 125mW 1% 27R	MF12 27R.
Resistor, 2K, 125mW, 1%	MF12 2K
Resistor, 2.2K, 125mW, 1%	MF12 2K2
Resistor, 125mW 1% 2K4	MF12 2K4
Resistor, 125mW 1% 2K7	MF12 2K7
Resistor, 125mW 1% 2R2	MF12 2R2
Resistor, 125mW 1% 300K	MF12 300K
Resistor, 125mW 1% 300R	MF12 300R
Resistor, 125mW 1% 30K	MF12 30K
Resistor, 125mW 1% 30R	MF12 30R
Resistor, 125mW 1% 330K	MF12 330K
Resistor, 125mW, 1%, 330R	MF12 330R
Resistor, 125mW 1% 330R	MF12 330R.
Resistor, 125mW 1% 33K	MF12 33K
Resistor, 125mW 1% 33R	MF12 33R
Resistor, 125mW 1% 360K	MF12 360K
Resistor, 125mW 1% 360R	MF12 360R
Resistor, 125mW 1% 36K	MF12 36K
Resistor, 125mW 1% 36R	MF12 36R
Resistor, 125mW 1% 390K	MF12 390K
Resistor, 125mW 1% 390K	MF12 390K.
Resistor, 125mW 1% 390R	MF12 390R
Resistor, 125mW 1% 39K	MF12 39K
Resistor, 125mW 1% 39R	MF12 39R
Resistor, 125mW 1% 3K	MF12 3K
Resistor, 125mW 1% 3K	MF12 3K.
Resistor, 3.3K, 125mW, 1%	MF12 3K3
Resistor, 125mW 1% 3K6	MF12 3K6
Resistor, 125mW 1% 3K6	MF12 3K6.
Resistor, 125mW 1% 3K9	MF12 3K9
Resistor, 125mW 1% 3R3	MF12 3R3
Resistor, 125mW 1% 430K	MF12 430K

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 125mW 1% 430R	MF12 430R
Resistor, 125mW 1% 43K	MF12 43K
Resistor, 125mW 1% 43K	MF12 43K.
Resistor, 125mW 1% 43R	MF12 43R
Resistor, 125mW 1% 43R	MF12 43R.
Resistor, 125mW 1% 470K	MF12 470K
Resistor, 125mW 1% 470R	MF12 470R
Resistor, 47K, 125mW, 1%	MF12 47K
Resistor, 125mW 1% 47R	MF12 47R
Resistor, 125mW 1% 47R	MF12 47R.
Resistor, 125mW 1% 4K3	MF12 4K3
Resistor, 125mW, 1%, 4.7K	MF12 4K7
Resistor, 125mW 1% 4R7	MF12 4R7
Resistor, 125mW 1% 510K	MF12 510K
Resistor, 125mW 1% 510R	MF12 510R
Resistor, 125mW 1% 510R	MF12 510R.
Resistor, 125mW 1% 51K	MF12 51K
Resistor, 125mW 1% 51R	MF12 51R
Resistor, 125mW 1% 560K	MF12 560K
Resistor, 125mW 1% 560R	MF12 560R
Resistor, 125mW 1% 560R	MF12 560R.
Resistor, 125mW 1% 56K	MF12 56K
Resistor, 125mW 1% 56K	MF12 56K.
Resistor, 125mW 1% 56R	MF12 56R
Resistor, 125mW 1% 5K1	MF12 5K1
Resistor, 125mW 1% 5K6	MF12 5K6
Resistor, 125mW 1% 620K	MF12 620K
Resistor, 125mW 1% 620R	MF12 620R
Resistor, 125mW 1% 62K	MF12 62K
Resistor, 125mW 1% 62R	MF12 62R
Resistor, 125mW 1% 62R	MF12 62R.
Resistor, 125mW 1% 680K	MF12 680K
Resistor, 125mW 1% 680K	MF12 680K.
Resistor, 125mW 1% 680R	MF12 680R
Resistor, 125mW 1% 680R	MF12 680R.
Resistor, 125mW 1% 68K	MF12 68K
Resistor, 125mW 1% 68R	MF12 68R

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 125mW 1% 6K2	MF12 6K2
Resistor, 125mW 1% 6K2	MF12 6K2.
Resistor, 125mW 1% 6K8	MF12 6K8
Resistor, 125mW 1% 6R8	MF12 6R8
Resistor, 125mW 1% 6R8	MF12 6R8.
Resistor, 125mW 1% 750K	MF12 750K
Resistor, 125mW 1% 750R	MF12 750R
Resistor, 125mW 1% 750R	MF12 750R.
Resistor, 125mW 1% 75K	MF12 75K
Resistor, 125mW 1% 75R	MF12 75R
Resistor, 125mW 1% 75R	MF12 75R.
Resistor, 125mW 1% 7K5	MF12 7K5
Resistor, 125mW 1% 820K	MF12 820K
Resistor, 125mW 1% 820R	MF12 820R
Resistor, 125mW 1% 82K	MF12 82K
Resistor, 125mW 1% 82R	MF12 82R
Resistor, 125mW 1% 8K2	MF12 8K2
Resistor, 125mW 1% 8K2	MF12 8K2.
Resistor, 125mW 1% 910K	MF12 910K
Resistor, 125mW 1% 910R	MF12 910R
Resistor, 125mW 1% 91K	MF12 91K
Resistor, 125mW 1% 91R	MF12 91R
Resistor, 125mW 1% 9K1	MF12 9K1
Resistor, 125mW 1% 9K1	MF12 9K1.
Resistor, 100K, 250mW, 1%	MF25 100K
Resistor, 100R, 250mW, 1%	MF25 100R
Resistor, 250mW 1% 100R	MF25 100R.
Resistor, 250mW, 1%, 10K	MF25 10K
Resistor, 250mW, 1%, 10R	MF25 10R
Resistor, 250mW 1% 110K	MF25 110K
Resistor, 250mW 1% 110K	MF25 110K.
Resistor, 250mW 1% 110R	MF25 110R
Resistor, 250mW 1% 110R	MF25 110R.
Resistor, 250mW 1% 11K	MF25 11K
Resistor, 250mW 1% 11R	MF25 11R
Resistor, 250mW 1% 120K	MF25 120K
Resistor, 250mW, 1%, 120R	MF25 120R

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 250mW, 1%, 12K	MF25 12K
Resistor, 250mW, 1% 12K	MF25 12K.
Resistor, 250mW 1% 12R	MF25 12R
Resistor, 250mW 1% 130K	MF25 130K
Resistor, 250mW 1% 130R	MF25 130R
Resistor, 250mW 1% 13K	MF25 13K
Resistor, 250mW 1% 13R	MF25 13R
Resistor, 250mW, 1%, 150K	MF25 150K
Resistor, 250mW 1%, 150K	MF25 150K.
Resistor, 250mW, 1%, 150R	MF25 150R
Resistor, 250mW, 1%, 15K,	MF25 15K
Resistor, 250mW 1% 15R	MF25 15R
Resistor, 250mW 1% 160K	MF25 160K
Resistor, 250mW 1% 160R	MF25 160R
Resistor, 250mW 1% 16K	MF25 16K
Resistor, 250mW 1% 16R	MF25 16R
Resistor, 250mW 1% 180K	MF25 180K
Resistor, 250mW 1% 180R	MF25 180R
Resistor, 250mW, 1%, 18K	MF25 18K
Resistor, 250mW 1% 18R	MF25 18R
Resistor, 250mW, 1%, 1K	MF25 1K
Resistor, 250mW 1% 1K1	MF25 1K1
Resistor, 250mW, 1%, 1.2K	MF25 1K2
Resistor, 250mW 1% 1K3	MF25 1K3
Resistor, 1.5K, 250mW, 1%	MF25 1K5
Resistor, 250mW 1% 1K6	MF25 1K6
Resistor, 250mW 1% 1K6	MF25 1K6.
Resistor, 250mW 1% 1K8	MF25 1K8
Resistor, 250mW, 1%, 1MR	MF25 1M
Resistor, 250mW 1% 1R	MF25 1R
Resistor, 250mW 1% 1R	MF25 1R.
Resistor, 250mW 1% 1R5	MF25 1R5
Resistor, 250mW, 1%, 200K	MF25 200K
Resistor, 250mW, 1%, 200R	MF25 200R
Resistor, 250mW, 1%, 20K	MF25 20K
Resistor, 250mW 1% 20R	MF25 20R
Resistor, 250mW, 1%, 220K	MF25 220K

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 220R, 250mW, 1%	MF25 220R
Resistor, 22K, 250mW, 1%	MF25 22K
Resistor, 250mW 1% 22R	MF25 22R
Resistor, 250mW 1% 240K	MF25 240K
Resistor, 250mW 1% 240R	MF25 240R
Resistor, 250mW 1% 24K	MF25 24K
Resistor, 250mW 1% 24R	MF25 24R
Resistor, 250mW 1% 270K	MF25 270K
Resistor, 250mW 1% 270R	MF25 270R
Resistor, 27K, 250mW, 1%	MF25 27K
Resistor, 250mW 1% 27R	MF25 27R
Resistor, 250mW 1% 27R	MF25 27R.
Resistor, 2K, 250mW, 1%	MF25 2K
Resistor, 2.2K, 250mW, 1%	MF25 2K2
Resistor, 250mW 1% 2K2	MF25 2K2.
Resistor, 250mW 1% 2K4	MF25 2K4
Resistor, 2.7K, 250mW, 1%	MF25 2K7
Resistor, 250mW 1% 2R2	MF25 2R2
Resistor, 250mW 1% 300K	MF25 300K
Resistor, 250mW 1% 300R	MF25 300R
Resistor, 250mW 1% 30K	MF25 30K
Resistor, 250mW 1% 30R	MF25 30R
Resistor, 250mW 1% 330K	MF25 330K
Resistor, 250mW 1% 330K	MF25 330K.
Resistor, 330R, 250mW, 1%	MF25 330R
Resistor, 33K, 250mW, 1%	MF25 33K
Resistor, 250mW 1% 33R	MF25 33R
Resistor, 250mW 1% 33R	MF25 33R.
Resistor, 250mW 1% 360K	MF25 360K
Resistor, 250mW 1% 360R	MF25 360R
Resistor, 250mW 1% 360R	MF25 360R.
Resistor, 250mW 1% 36K	MF25 36K
Resistor, 250mW 1% 36R	MF25 36R
Resistor, 250mW 1% 390K	MF25 390K
Resistor, 250mW 1% 390K	MF25 390K.
Resistor, 250mW 1% 390R	MF25 390R
Resistor, 250mW 1% 39K	MF25 39K

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 250mW 1% 39R	MF25 39R
Resistor, 3K, 250mW, 1%	MF25 3K
Resistor, 3.3K, 250mW, 1%	MF25 3K3
Resistor, 250mW 1% 3K6	MF25 3K6
Resistor, 250mW 1% 3K6	MF25 3K6.
Resistor, 3.9K, 250mW, 1%	MF25 3K9
Resistor, 250mW 1% 3R3	MF25 3R3
Resistor, 250mW 1% 430K	MF25 430K
Resistor, 250mW 1% 430K	MF25 430K.
Resistor, 250mW 1% 430R	MF25 430R
Resistor, 250mW 1% 43K	MF25 43K
Resistor, 250mW 1% 43K	MF25 43K.
Resistor, 250mW 1% 43R	MF25 43R
Resistor, 470K, 250mW, 1%	MF25 470K
Resistor, 250mW 1% 470K	MF25 470K.
Resistor, 470R, 250mW, 1%	MF25 470R
Resistor, 250mW 1% 470R	MF25 470R.
Resistor, 47K, 250mW, 1%	MF25 47K
Resistor, 47R, 250mW, 1%	MF25 47R
Resistor, 250mW 1% 4K3	MF25 4K3
Resistor, 4.7K, 250mW, 1%	MF25 4K7
Resistor, 250mW 1% 4K7	MF25 4K7.
Resistor, 250mW 1% 4R7	MF25 4R7
Resistor, 250mW 1% 510K	MF25 510K
Resistor, 250mW 1% 510K	MF25 510K.
Resistor, 510R, 250mW, 1%	MF25 510R
Resistor, 250mW 1% 51K	MF25 51K
Resistor, 250mW 1% 51R	MF25 51R
Resistor, 250mW 1% 560K	MF25 560K
Resistor, 250mW 1% 560K	MF25 560K.
Resistor, 560R, 250mW, 1%	MF25 560R
Resistor, 250mW 1% 56K	MF25 56K
Resistor, 250mW 1% 56R	MF25 56R
Resistor, 5.1K, 250mW, 1%	MF25 5K1
Resistor, 5.6K, 250mW, 1%	MF25 5K6
Resistor, 250mW 1% 5K6	MF25 5K6.
Resistor, 250mW 1% 620K	MF25 620K

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 250mW 1% 620R	MF25 620R
Resistor, 250mW 1% 62K	MF25 62K
Resistor, 250mW 1% 62R	MF25 62R
Resistor, 250mW 1% 680K	MF25 680K
Resistor, 680R, 250mW, 1%	MF25 680R
Resistor, 68K, 250mW, 1%	MF25 68K
Resistor, 250mW 1% 68K	MF25 68K.
Resistor, 68R, 250mW, 1%	MF25 68R
Resistor, 250mW 1% 6K2	MF25 6K2
Resistor, 250mW 1% 6K2	MF25 6K2.
Resistor, 6.8K, 250mW, 1%	MF25 6K8
Resistor, 250mW 1% 6R8	MF25 6R8
Resistor, 250mW 1% 6R8	MF25 6R8.
Resistor, 250mW 1% 750K	MF25 750K
Resistor, 250mW 1% 750R	MF25 750R
Resistor, 250mW 1% 75K	MF25 75K
Resistor, 250mW 1% 75K	MF25 75K.
Resistor, 250mW 1% 75R	MF25 75R
Resistor, 250mW 1% 75R	MF25 75R.
Resistor, 250mW 1% 7K5	MF25 7K5
Resistor, 250mW 1% 820K	MF25 820K
Resistor, 250mW 1% 820R	MF25 820R
Resistor, 250mW 1% 82K	MF25 82K
Resistor, 250mW 1% 82K	MF25 82K.
Resistor, 250mW 1% 82R	MF25 82R
Resistor, 250mW 1% 82R	MF25 82R.
Resistor, 8.2K, 250mW, 1%	MF25 8K2
Resistor, 250mW 1% 910K	MF25 910K
Resistor, 250mW 1% 910K	MF25 910K.
Resistor, 250mW 1% 910R	MF25 910R
Resistor, 250mW 1% 910R	MF25 910R.
Resistor, 250mW 1% 91K	MF25 91K
Resistor, 250mW 1% 91K	MF25 91K.
Resistor, 250mW 1% 91R	MF25 91R
Resistor, 250mW 1% 9K1	MF25 9K1
Resistor, 100K, 500mW, 1%	MF50 100K
Resistor, 500mW 1% 100K	MF50 100K.

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 100R, 500mW, 1%	MF50 100R
Resistor, 10K, 500mW, 1%	MF50 10K
Resistor, 500mW 1% 10R	MF50 10R
Resistor, 500mW 1% 10R	MF50 10R.
Resistor, 500mW 1% 110K	MF50 110K
Resistor, 500mW 1% 110R	MF50 110R
Resistor, 500mW 1% 11K	MF50 11K
Resistor, 500mW 1% 11K	MF50 11K.
Resistor, 500mW 1% 11R	MF50 11R
Resistor, 500mW 1% 120K	MF50 120K
Resistor, 500mW 1% 120R	MF50 120R
Resistor, 500mW 1% 120R	MF50 120R.
Resistor, 500mW 1% 12K	MF50 12K
Resistor, 500mW 1% 12R	MF50 12R
Resistor, 500mW 1% 12R	MF50 12R.
Resistor, 500mW 1% 130K	MF50 130K
Resistor, 500mW 1% 130R	MF50 130R
Resistor, 500mW 1% 13K	MF50 13K
Resistor, 500mW 1% 13K	MF50 13K.
Resistor, 500mW 1% 13R	MF50 13R
Resistor, 500mW 1% 150K	MF50 150K
Resistor, 500mW 1% 150R	MF50 150R
Resistor, 500mW 1% 15K	MF50 15K
Resistor, 500mW 1% 15R	MF50 15R
Resistor, 500mW 1% 15R	MF50 15R.
Resistor, 500mW 1% 160K	MF50 160K
Resistor, 500mW 1% 160K	MF50 160K.
Resistor, 500mW 1% 160R	MF50 160R
Resistor, 500mW 1% 16K	MF50 16K
Resistor, 500mW 1% 16R	MF50 16R
Resistor, 500mW 1% 180K	MF50 180K
Resistor, 500mW 1% 180R	MF50 180R
Resistor, 500mW 1% 18K	MF50 18K
Resistor, 500mW 1% 18R	MF50 18R
Resistor, 1K, 500mW, 1%	MF50 1K
Resistor, 500mW 1% 1K1	MF50 1K1
Resistor, 500mW 1% 1K2	MF50 1K2

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 500mW 1% 1K3	MF50 1K3
Resistor, 500mW 1% 1K5	MF50 1K5
Resistor, 500mW 1% 1K6	MF50 1K6
Resistor, 500mW 1% 1K6	MF50 1K6.
Resistor, 500mW 1% 1K8	MF50 1K8
Resistor, 500mW 1% 1M	MF50 1M
Resistor, 500mW 1% 1M	MF50 1M.
Resistor, 500mW 1% 1R	MF50 1R
Resistor, 500mW 1% 1R	MF50 1R.
Resistor, 500mW 1% 1R5	MF50 1R5
Resistor, 500mW 1% 200K	MF50 200K
Resistor, 500mW 1% 200K	MF50 200K.
Resistor, 500mW 1% 200R	MF50 200R
Resistor, 500mW 1% 200R	MF50 200R.
Resistor, 500mW 1% 20K	MF50 20K
Resistor, 500mW 1% 20R	MF50 20R
Resistor, 500mW 1% 220K	MF50 220K
Resistor, 500mW 1% 220R	MF50 220R
Resistor, 500mW 1% 22K	MF50 22K
Resistor, 500mW 1% 22R	MF50 22R
Resistor, 500mW 1% 22R	MF50 22R.
Resistor, 500mW 1% 240K	MF50 240K
Resistor, 500mW 1% 240R	MF50 240R
Resistor, 500mW 1% 24K	MF50 24K
Resistor, 500mW 1% 24K	MF50 24K.
Resistor, 500mW 1% 24R	MF50 24R
Resistor, 500mW 1% 270K	MF50 270K
Resistor, 500mW 1% 270K	MF50 270K.
Resistor, 500mW 1% 270R	MF50 270R
Resistor, 500mW 1% 27K	MF50 27K
Resistor, 500mW 1% 27R	MF50 27R
Resistor, 500mW 1% 2K	MF50 2K
Resistor, 500mW 1% 2K2	MF50 2K2
Resistor, 500mW 1% 2K4	MF50 2K4
Resistor, 500mW 1% 2K7	MF50 2K7
Resistor, 500mW 1% 2K7	MF50 2K7.
Resistor, 500mW 1% 2R2	MF50 2R2

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 500mW 1% 300K	MF50 300K
Resistor, 500mW 1% 300R	MF50 300R
Resistor, 500mW 1% 30K	MF50 30K
Resistor, 500mW 1% 30R	MF50 30R
Resistor, 500mW 1% 330K	MF50 330K
Resistor, 500mW 1% 330R	MF50 330R
Resistor, 500mW 1% 33K	MF50 33K
Resistor, 500mW 1% 33R	MF50 33R
Resistor, 500mW 1% 33R	MF50 33R.
Resistor, 500mW 1% 360K	MF50 360K
Resistor, 500mW 1% 360K	MF50 360K.
Resistor, 500mW 1% 360R	MF50 360R
Resistor, 500mW 1% 36K	MF50 36K
Resistor, 500mW 1% 36R	MF50 36R
Resistor, 500mW 1% 390K	MF50 390K
Resistor, 500mW 1% 390K	MF50 390K.
Resistor, 500mW 1% 390R	MF50 390R
Resistor, 500mW 1% 39K	MF50 39K
Resistor, 500mW 1% 39K	MF50 39K.
Resistor, 500mW 1% 39R	MF50 39R
Resistor, 500mW 1% 39R	MF50 39R.
Resistor, 500mW 1% 3K	MF50 3K
Resistor, 500mW 1% 3K3	MF50 3K3
Resistor, 500mW 1% 3K6	MF50 3K6
Resistor, 500mW 1% 3K6	MF50 3K6.
Resistor, 500mW 1% 3K9	MF50 3K9
Resistor, 500mW 1% 3R3	MF50 3R3
Resistor, 500mW 1% 430K	MF50 430K
Resistor, 500mW 1% 430R	MF50 430R
Resistor, 500mW 1% 430R	MF50 430R.
Resistor, 500mW 1% 43K	MF50 43K
Resistor, 500mW 1% 43R	MF50 43R
Resistor, 500mW 1% 470K	MF50 470K
Resistor, 500mW 1% 470K	MF50 470K.
Resistor, 500mW 1% 470R	MF50 470R
Resistor, 500mW 1% 470R	MF50 470R.
Resistor, 500mW 1% 47K	MF50 47K

Precision Metal Film Fixed Resistor Axial Leaded



Description	Part Number
Resistor, 500mW 1% 47K	MF50 47K.
Resistor, 500mW 1% 47R	MF50 47R
Resistor, 500mW 1% 4K3	MF50 4K3
Resistor, 500mW 1% 4K3	MF50 4K3.
Resistor, 500mW 1% 4K7	MF50 4K7
Resistor, 500mW 1% 4R7	MF50 4R7
Resistor, 500mW 1% 510K	MF50 510K
Resistor, 500mW 1% 510K	MF50 510K.
Resistor, 500mW 1% 510R	MF50 510R
Resistor, 500mW 1% 51K	MF50 51K
Resistor, 500mW 1% 51K	MF50 51K.
Resistor, 500mW 1% 51R	MF50 51R
Resistor, 500mW 1% 51R	MF50 51R.
Resistor, 500mW 1% 560K	MF50 560K
Resistor, 500mW 1% 560R	MF50 560R
Resistor, 500mW 1% 560R	MF50 560R.
Resistor, 500mW 1% 56K	MF50 56K
Resistor, 500mW 1% 56K	MF50 56K.
Resistor, 500mW 1% 56R	MF50 56R
Resistor, 500mW 1% 5K1	MF50 5K1
Resistor, 500mW 1% 5K6	MF50 5K6
Resistor, 500mW 1% 620K	MF50 620K
Resistor, 500mW 1% 620K	MF50 620K.
Resistor, 500mW 1% 620R	MF50 620R
Resistor, 500mW 1% 62K	MF50 62K
Resistor, 500mW 1% 62R	MF50 62R
Resistor, 500mW 1% 62R	MF50 62R.
Resistor, 500mW 1% 680K	MF50 680K
Resistor, 500mW 1% 680K	MF50 680K.
Resistor, 500mW 1% 680R	MF50 680R
Resistor, 500mW 1% 68K	MF50 68K
Resistor, 500mW 1% 68R	MF50 68R
Resistor, 500mW 1% 6K2	MF50 6K2
Resistor, 500mW 1% 6K8	MF50 6K8
Resistor, 500mW 1% 6R8	MF50 6R8
Resistor, 500mW 1% 750K	MF50 750K
Resistor, 500mW 1% 750K	MF50 750K.

Precision Metal Film Fixed Resistor

Axial Leaded



Description	Part Number
Resistor, 500mW 1% 750R	MF50 750R
Resistor, 500mW 1% 750R	MF50 750R.
Resistor, 500mW 1% 75K	MF50 75K
Resistor, 500mW 1% 75R	MF50 75R
Resistor, 500mW 1% 7K5	MF50 7K5
Resistor, 500mW 1% 820K	MF50 820K
Resistor, 500mW 1% 820K	MF50 820K.
Resistor, 500mW 1% 820R	MF50 820R
Resistor, 500mW 1% 82K	MF50 82K
Resistor, 500mW 1% 82R	MF50 82R
Resistor, 500mW 1% 82R	MF50 82R.
Resistor, 500mW 1% 8K2	MF50 8K2
Resistor, 500mW 1% 8K2	MF50 8K2.
Resistor, 500mW 1% 910K	MF50 910K
Resistor, 500mW 1% 910R	MF50 910R
Resistor, 500mW 1% 910R	MF50 910R.
Resistor, 500mW 1% 91K	MF50 91K
Resistor, 500mW 1% 91R	MF50 91R
Resistor, 500mW 1% 91R	MF50 91R.
Resistor, 500mW 1% 9K1	MF50 9K1
Resistor, 500mW 1% 9K1	MF50 9K1.

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.