

# Software Architecture Course Notes

Semester 1, 2022

Brae Webb & Richard Thomas

Presented for the Software Architecture course  
at the University of Queensland



THE UNIVERSITY  
OF QUEENSLAND  
A U S T R A L I A

# Contents

<b>Software Architecture</b>	<b>4</b>
1 Introduction	4
2 High Quality Software	4
2.1 Functional Requirements	4
2.2 Constraints	5
2.3 Principles	5
2.4 Quality Attributes	6
2.5 Documentation	6
3 Attributes in Tension	6
4 The World Today	7
5 Conclusion	7
<b>Security Principles</b>	<b>9</b>
1 Introduction	9
2 You	9
3 Principles of Securing Software	10
3.1 Principle of Least Privilege	10
3.2 Principle of Failing Securely	11
3.3 Principle of KISS	11
3.4 Principle of Open Design	11
3.5 Principle of Usability	12
4 Practices of Secure Software	13
4.1 Encryption	13
4.2 Sanitization	13
4.3 DoS Protection	13
4.4 Dependency Management	13
4.5 Firewalls	13
5 Summary	13
A Original Security Design Principles	13
<b>Layered Architecture</b>	<b>15</b>
1 Introduction	15
2 Standard Form	16
3 Deployment Variations	17

<b>4</b>	<b>Closed/Open Layers</b>	<b>19</b>
<b>Architectural Views</b>		<b>21</b>
<b>1</b>	<b>Introduction</b>	<b>21</b>
<b>2</b>	<b>4+1 Views</b>	<b>21</b>
<b>3</b>	<b><i>Software Architecture in Practice Views</i></b>	<b>22</b>
3.1	Module Views . . . . .	22
3.2	Component-and-Connector Views . . . . .	22
3.3	Allocation Views . . . . .	23
<b>4</b>	<b>Sahara eCommerce Example</b>	<b>23</b>
4.1	Architecturally Significant Requirements . . . . .	24
4.2	Allocation View . . . . .	24
4.2.1	Deployment Diagram Notation . . . . .	26
4.3	Component-and-Connector View . . . . .	26
4.3.1	Component Diagram Notation . . . . .	27
4.3.2	Behaviour Structure . . . . .	27
4.3.3	Sequence Diagram Notation . . . . .	28
4.4	Module View . . . . .	28
4.4.1	Class Diagram Notation . . . . .	29
4.4.2	Detailed Behaviour Structure . . . . .	30
4.4.3	Sequence Diagram Notation . . . . .	31
4.5	Delivering Architecturally Significant Requirements . . . . .	31
<b>5</b>	<b>C4 Model</b>	<b>32</b>
5.1	System Context . . . . .	33
5.2	Containers . . . . .	33
5.3	Components . . . . .	35
5.3.1	Component Diagram Detail . . . . .	37
5.4	Code . . . . .	37
5.5	Dynamic . . . . .	38
5.6	Deployment . . . . .	38
<b>6</b>	<b>Tools</b>	<b>40</b>
<b>7</b>	<b>Conclusion</b>	<b>41</b>
<b>Architectural Decision Records</b>		<b>42</b>
<b>1</b>	<b>Introduction</b>	<b>42</b>
<b>2</b>	<b>Template</b>	<b>43</b>
<b>3</b>	<b>ADR Example</b>	<b>43</b>
<b>4</b>	<b>Quality</b>	<b>44</b>
<b>5</b>	<b>What to Put in an ADR?</b>	<b>45</b>

<b>6 Conclusion</b>	<b>45</b>
 <b>Pipeline Architecture</b>	 <b>46</b>
1 Introduction	46
2 Terminology	46
3 Case Study: MapReduce	47
4 Case Study: Compilers	48
 <b>Containers</b>	 <b>50</b>
1 Introduction	50
2 History and Fundamentals	50
2.1 Namespaces . . . . .	50
2.2 Layered Filesystem . . . . .	51
2.3 Summary . . . . .	52
3 Docker FROM scratch	52
4 Best Practices	54
 <b>Infrastructure as Code</b>	 <b>55</b>
1 Introduction	55
2 Brief History	55
3 Stack Configuration	55

---

# Software Architecture

Software Architecture

February 21, 2022

Brae Webb & Richard Thomas

---

## 1 Introduction

An introduction to Software Architecture would be incomplete without the requisite exploration into the term 'software architecture'. The term is often overloaded to describe a number of completely detached concepts. The overloaded nature of the term makes an introduction quite challenging. Martin Fowler wrestles with this difficulty in his talk on "[Making Architecture Matter](https://www.youtube.com/watch?v=DngAZyWMGR0)"<sup>1</sup>. In the talk Fowler settles on the slightly vague definition from Ralph Johnson [1]:

**Definition 1. Software Architecture**

The important stuff; whatever that is.

In this course, we will try to narrow the scope slightly. We need a definition which encompasses the numerous practical strategies which you need to survive and thrive in industry life. This definition should not be attributed to the term 'Software Architecture'; that term is much too broad to define succinctly. This is purely the definition used to provide an appropriate scope for the course.

**Definition 2. Software Architecture: The Course**

The set of tools, processes, and design patterns which enable me to deliver high quality software.

## 2 High Quality Software

We assume that as software engineers you wish to deliver high quality software systems. What makes life interesting<sup>2</sup> is that *quality*, like *beauty*, is in the eye of the beholder. As a diligent and enthusiastic software engineer, you may think that *high quality* means well designed software with few defects. On the other hand, your users may think that *high quality* means an engaging user experience, with no defects. While your project sponsor, who is funding the project, may think that *high quality* means the software includes all the features they requested and was delivered on-time and on-budget. Rarely is there enough time and money available to deliver everything to the highest standard. The development team has to balance competing expectations and priorities to develop a software system that is a good compromise and meets its key goals.

From the perspective of designing a software architecture, competing expectations provides what are sometimes called *architectural drivers*.

### 2.1 Functional Requirements

A seemingly obvious driver is the functional requirements for the software system, i.e. what the software should do. If you do not know what the software is meant to do, how can you design it? You do not need an extensive and in-depth description of every small feature of the software, but you do need to know

---

<sup>1</sup><https://www.youtube.com/watch?v=DngAZyWMGR0>

<sup>2</sup>As in the apocryphal Chinese curse "May you live in interesting times."

what problem the software is meant to solve, who are the key users, and what are the key features of the software. Without this information, you do not know what style of architecture is going to be appropriate for the software system.

For example, consider an application that allows users to write and save notes with embedded images and videos. Say the decision was made to implement it as a simple mobile app that saves notes locally. If it is then decided that web and desktop applications are needed, allowing users to sync their notes across applications and share notes with others, the application will need to be redesigned from scratch. Knowing up-front that the software needed to support multiple platforms, and that syncing and sharing notes was important, would have allowed the developers to design a software architecture that would support this from the start.<sup>3</sup>

## 2.2 Constraints

Constraints are external factors that are imposed on the development project. Commonly, these are imposed by the organisation for whom you are building the software system. The most obvious constraint is time and budget. A sophisticated software architecture will take more time, and consume more of the total budget, than a simple but less flexible architecture.

Other common constraints are technology, people, and the organisation's environment. Technology constraints are one of the most common set of constraints that affect the design of the architecture. Even if it is a "greenfields" project<sup>4</sup> there will usually be restrictions on choices of technology that may or may not be used. For example, if all of the organisation's existing applications are running on the Google cloud platform, there will probably be a restriction requiring all new applications to be built on the same platform to avoid the overheads of working with different cloud providers.

People constraints takes into consideration the skills that are available within the organisation and the availability of developers for the project. Designing an architecture that requires skills that are not available, will add an overhead to the project's development cost. If contractors can be hired, or training is available, these may reduce the overhead but the decision needs to be made based on the risks and benefits.

The organisation's environment may influence other constraints, or add new constraints. An organisation that encourages innovation may be flexible in allowing some technology constraints to be broken. If the project is of strategic value to the business, there may be options to negotiate for a larger budget or to adopt a new technology<sup>5</sup>, if they could lead to a more robust solution with a longer lifespan. Politics can introduce constraints on architectural choices. If there is an influential group who promote a particular architectural style, it may be difficult or impossible to make different choices.

## 2.3 Principles

Principles are self-imposed approaches to designing the software. Typically these are standards that all developers are expected to follow to try to ensure the overall software design is consistent. From a programming perspective, coding standards and test coverage goals are examples of principles that all developers are expected to follow. Architectural principles typically relate to how the software should be structured and how design decisions should be made to work well with the software architecture. Consequently, principles usually do not influence the architecture<sup>6</sup>, rather the architecture will influence which principles should be prioritised during software design.

As an example, if the software architecture is designed to be scalable to accommodate peaks in load, then an architectural principle might be that software components should be stateless to allow them to

---

<sup>3</sup>This is different to building a quick-and-dirty prototype to explore options. That is a valid design process, and in that case minimal effort will be put into creating a well-designed app.

<sup>4</sup>This refers to the idea that it is a new project and is not limited by needing to conform to existing system's or expectations.

<sup>5</sup>I have consulted with organisations who have adopted new, and risky at the time, technologies to potentially gain business benefits like easier extensibility.

<sup>6</sup>The exception to this is if some principles are constraints enforced by the organisation.

be easily replicated to share the load. Another principle might be that an architecture that relies on an underlying object model, will adopt the SOLID design principles [2].

## 2.4 Quality Attributes

While the functional requirements specify what the software should do, non-functional requirements specify properties required for the project to be successful. These non-functional requirements are also termed *quality attributes*.

Often quality attributes are specified by phrases ending in -ility. Medical software needs *reliability*. Social media needs *availability*. Census software needs *scalability*.

Below is a collection of non-exhaustive quality attributes to help give you an idea of what we will be looking at in this course.

**Modularity** Components of the software are separated into discrete modules.

**Availability** The software is available to access by end users, either at any time or on any platform, or both.

**Scalability** The software is simultaneously usable by a large amount of end users.

**Extensibility** Features or extensions can be easily added to the base software.

**Testability** The software is designed so that automated tests can be easily deployed.

Quality attributes are one of the main focuses of a software architect. Quality attributes are achieved through architecture designed to support them. Likewise, software architecture quality and consistency is achieved by principles put in place by a software architect and the development team.

Architects are responsible for identifying the important attributes for their project and implementing architecture and principles which satisfies the desired attributes.

## 2.5 Documentation

The importance of these architectural drivers means they need to be documented<sup>7</sup>. The extent and format of the documentation will depend on the size of the project, team organisation, and the software engineering process being followed. The larger the team, or if the team is distributed between different locations, the more important it is that the documentation is well-defined and easily accessible. The documentation may be stored as notes in a wiki or as a collection of user stories and other notes. Or, it could be an extensive set of requirements and design specifications following a standard like [ISO/IEC/IEEE 15289](https://www.iso.org/obp/ui/#iso:std:iso-iec-ieee:15289)<sup>8</sup>.

## 3 Attributes in Tension

One of the defining characteristics of quality attributes is that they are often in conflict with each other. It is a valiant yet wholly impractical pursuit to construct software which meets all quality attributes.

The role of a software architect is to identify which quality attributes are crucial to the success of their project, and to design an architecture and implement principles which ensure the quality attributes are achieved.

---

<sup>7</sup>Documentation is the castor oil of programming, managers know it must be good because programmers hate it so much [3].

<sup>8</sup><https://www.iso.org/obp/ui/#iso:std:iso-iec-ieee:15289>

The first law of software architecture, as defined by Richards [4], reflects the difficulty in supporting multiple quality attributes.

**Definition 3. The First Law of Software Architecture**

Everything in software architecture is a trade-off.

Galster and Angelov [5] define this as ‘wicked architecture’. They identify the ‘wicked’ nature of architecture as the main difficulty in teaching the subject.

**Definition 4. Wicked Architecture**

There are often no clear problem descriptions, no clear solutions, good or bad solutions, no clear rules when to “stop” architecting and mostly team rather than individual work.

They stress that “In contrast, other software engineering topics such as programming lead to solutions that can be checked and measured for correctness. Architecture may be the worst-case scenario when it comes to fuzziness in software engineering”.

Despite this difficulty, in this course we intend to expose you to a number of case studies, architectures, and tools which aim to give you experience in tackling the trade-offs involved in software architecture.

## 4 The World Today

Software architecture today is more important than ever. The importance of architecture can be considered a result of *expectations* and *infrastructure*. Today we expect our software to be available 24/7. To exemplify this point, in October last year Facebook went offline for 6-7 hours out of the 8760 hours of the year. Those 6-7 hours of downtime resulted in mass media coverage, \$60 million loss of revenue, and a 5% drop in company shares which caused Zuckerberg’s wealth alone to drop \$6 billion. Interestingly, the outage also caused other sites such as Gmail, TikTok, and Snapchat to slowdown.

This is a massive change in public expectations for software availability. As recently as 2017, human resources at UQ would monopolise the university’s computing resources for an evening each fortnight to calculate the payroll. Nowadays that lack of availability from even the university’s software systems would be completely unacceptable. The change in expectations has forced developers to adapt by designing architectures capable of supporting this heightened up-time.

In addition to shifting expectations, developers now have access to a range of Infrastructure as a Service (IaaS) platforms. IaaS empowers developers to quickly and programmatically create and manage computing, networking, and storage resources. In part, this enables individual developers to support up-times comparable to tech giants. Of course, to be able to support these up-times software has increased in overall complexity. A website is now commonly spread over multiple servers, marking a change from centralised systems to distributed systems.

## 5 Conclusion

You should now have some understanding of what software architecture is and that it is, at least in our view, important. Let’s return to our definition for the course.

**Definition 2. Software Architecture: The Course**

The set of tools, processes, and design patterns which enable me to deliver high quality software.

In practical terms, what does this mean you should expect from the course? First, you will learn how to communicate your visions of software architecture through *architectural views*. From there, you will use



quality attributes such as extensibility, scalability, etc. to motivate the introduction of common architectural patterns, processes, and tooling which support those attributes.

For example, you can expect extensibility to motivate an introduction to plugin-based architectures. You can expect scalability to motivate our introduction to load balancers. And testability to motivate a look into A/B testing practices.

**TODO: Fix the links to not be brae-centric**

You can view the planned outline for the course on the [course website](#)<sup>9</sup>. All the course material can be found on [GitHub](#)<sup>10</sup>. If you think you can explain a concept more succinctly, or find a typo, you are encouraged to submit a pull request to help improve the course. We really hope that you enjoy the course and, perhaps more importantly, benefit from it in your careers as software development professionals!

---

<sup>9</sup><https://csse6400.brae.dev/>

<sup>10</sup><https://github.com/CSSE6400/software-architecture>

---

# Security Principles

Software Architecture

February 21, 2022

Brae Webb

---

## 1 Introduction

One quality attribute which developers often overlook is security. Security can be the cause of a great deal of frustration for developers; there are no comfortable architectures, nor command-line tools to magically make an application secure. While the world depends on technology more than ever, and, at the same time the impacts of cyber attacks become more devastating, it has become crystal clear that security is everyone's responsibility. As users of technology, as developers, and as architects, we all need to ensure we take security seriously.

Learning, and for that matter, teaching, how to make software secure is no easy task. Every application has different flaws and risks, every attack vector and exploit is unique; managing to keep up with it all is daunting. None of us will ever be able to build a completely secure system but that is no reason to stop trying. As developers and architects, security should be an on-going process in the back of your minds. A nagging voice which constantly asks 'what if?'

We introduce security first to set the example. As we go through this course, the principle of security will recur again and again. With each architecture introduced, we will stop and ask ourselves 'what if?'. In your future careers, you should endeavour to continue this same practice. Each feature, pipeline, access control change, or code review, ask yourself, 'what are the security implications?'

With that said, there are some useful principles, and a handful of best practices which we will explore. But again, even if you follow these practices and embody the principles, your applications will still be hopelessly insecure, unless, you constantly reflect on the security implications of your each and every decision.

## 2 You

Before we even fantasise about keeping our applications secure, let's review if you are secure right now. As developers we often have heightened privileges and access, at times above that of even company CEOs. If you are not secure, then nor is anything you work on. Let's review some of the basics.

**Keep your software up to date.** Are you running the latest version of your operating system? The latest Chrome, or Firefox, or god-forbid, Edge? If not, then there is a good chance you are currently at risk. Software updates, while annoying, provide vital patches to discovered exploits. You must keep your software up to date.

**Use multi-factor authentication.** This may be hard to explain to your grandmother but this should be obvious to software developers. One million passwords are stolen every week [6]. If you don't have some sort of multi-factor authentication enabled, hackers can access your account immediately after stealing your password.

**Use a password manager.** Following from the startling statistic of a million stolen passwords per week, we must seriously consider how we use passwords. Our practices should be guided by the fact that at least one service we use likely stores our password insecurely. We should assume that our password will be compromised. What can we do about this? The first thing is to avoid password reuse, one password per service. Of course, humans have very limited memory for remembering good passwords. So go through and update your passwords with randomly generated secure passwords and then, store them in a password manager.

## 3 Principles of Securing Software

Okay, now that we are not a security risk ourselves, we can start considering how to secure the software we develop. Before looking at pragmatic practices, we will develop a set of guiding principles. These principles are far from comprehensive but they provide a useful foundation to enable discussion of our security practices. The principles presented in this course are derived from Saltzer and Schroeder [7], Gasser [8], and Viega and McGeaw [9]. Some principles have been renamed for consistency and clarity. Refer to Appendix A for the comprehensive list of principles from these sources.

### 3.1 Principle of Least Privilege

Every program and every privileged user of the system should operate using the least amount of privilege necessary to complete the job.

— Jerry Saltzer [10]

The principle of least privilege was identified in 1974 by Jerry Saltzer [10]. This principle is mostly common sense and the benefits should be apparent. If you maintain the principle of least privilege then you minimise your attack surface by limiting the amount of damage any one user can do. This protects software from intentionally malicious actors while also minimising the damage of bugs which occur unintentionally in the software.

**Example** Consider a web application which lists COVID close contact locations for a state. We will assume that the locations are maintained within an SQL database. Assume that each time the tracing page is loaded, an SQL query is sent to the database to find all current close contact locations. If the developers follow the principle of least privilege, then the account used to query that data would only be able to list the current locations.

For this example, the tracing website had to be developed and rolled out quickly, as such, the developers created only one SQL user which they used for both the tracing website and the portal where the government can log new locations. This user account would have to have the ability to create new close contact locations, and if done poorly enough, the account might even have access to delete existing locations.

Since the developers have violated the principle of least privilege, their software is now at risk. If a malicious actor is able to gain database access via SQL injection, or, just as likely, if the software has a typo in an SQL query, the integrity of the tracing data could be jeopardised. This could be mitigated by using the principle of least privilege and creating separate user accounts for modifying and subsequently viewing the data.

**Exemplar** One of the primary examples of a good application of this principle is within Unix operating systems. In the Unix operating system, a sudoer (a user account which can use the `sudo` command) has a lot of destructive power. Commands running at the sudo level can do essentially anything they wish, including wiping the computer. However, a sudoer is not typically using these privileges. The user has to specify that they intend to run a command with elevated privileges, which helps avoid accidental destruction of the computer.

**Fail-safe defaults** The principle of fail-safe defaults is often presented on its own. Fail-safe defaults means that the default for access to a resource should be denied until explicit access is provided. We include fail-safe defaults as a property of the principle of least privilege given the strong connection.

## 3.2 Principle of Failing Securely

Death, taxes, and computer system failure are all inevitable to some degree. Plan for the event.

— Howard and LeBlanc [11]

Computer systems fail. As we will see in this course, the more complicated your software, the more often and dramatically it can be expected to fail. The principle of failing securely asks us to stash away our optimism and become a realist for a moment. When designing an architecture or a piece of software, plan for the ways your software will fail. And when your software does fail, it should not create a security vulnerability [12].

**Example** An interesting example of failing securely comes from Facebook's October 2021 outage which we discussed previously. As you may be aware, one cause of the outage was a DNS resolution issue triggered by Facebook's data centres going offline [13]. The DNS resolution issue meant that the internal Facebook development tools and communication channels went down as well. As you might expect, losing your tools and your team members makes resolving an outage far more difficult.

Early reports of the incident indicated that the outage of Facebook's internal infrastructure also meant employees were locked out of the data centres. While it seems that developers were locked out of their buildings, the data centres were not affected. Nevertheless, it is interesting to consider whether an internal outage should, somewhat understandably, lock access to the data centres.

This example highlights the key difference between a system which *fails safely*<sup>11</sup> and a system which *fails securely*. In a fail *safe* system, an internal outage would allow physical access to the data centre to enable maintenance to fix the problem. Whereas in a fail *secure* system, the outage would cause the data centre to lock and prevent access to maintain the security of the data within. There isn't one correct way to deal with failure. While in this case it would have helped Facebook resolve the issue quicker, if a data breach occurred through an intentional outage there would be equal criticism.

Regardless of the security policy you choose, it is always important to prepare for failure and weigh the pros and cons of each policy.

## 3.3 Principle of KISS

Simplicity is the ultimate sophistication

— Leonardo Da Vinci<sup>12</sup>

We will keep this principle simple. The principle of Keep it Simple Stupid (KISS) is needed as complicated software or processes are, more often than not, insecure. Simple means less can go wrong.

## 3.4 Principle of Open Design

One ought to design systems under the assumption that the enemy will immediately gain full familiarity with them.

— C. E. Shannon [14]

The principle of open design, also known as Kerckhoffs' principle, stresses that security through obscurity, or security through secrecy, does not work. If the security of your software relies on keeping certain implementation details secret then your system is not secure. Of course, there are some acceptable secrets such as private keys, however, these should still be considered a vulnerability. Always assume that if an implementation detail can be discovered, it will be. There is software constantly scanning the internet for open ports, unpublished IP addresses, and routers secured by the default username and password.

---

<sup>11</sup>No relation to fail-safe defaults.

<sup>12</sup>maybe

**Example** An example which immediately springs to mind is our first and second year assignment marking tools. To date, I'm not aware of the tools being exploited, however they are currently vulnerable. The tools currently rely on students not knowing how they work. There are ways to create 'assignment' submissions which pass all the functionality tests for any given semester. Fortunately, the threat of academic misconduct is enough of a deterrent that it has yet to be a problem.

The example does illustrate why the principle of open design is so frequently violated. In the short-term security through obscurity can work, and work well, but it is a long-term disaster waiting to happen. It is also common place to violate the principle slightly by trying to build systems which do not rely on secrecy but keeping the systems secret 'just in case'. In many situations this is appropriate, however, a truly secure system should be open for community scrutiny.

### 3.5 Principle of Usability

TBD

— Unknown

The final principle we should explore is the principle of usability, also known as 'psychological acceptability'. This principle asks that we have realistic expectations of our users. If the user is made to jump through numerous hoops to securely use your application, they will find a way around it. The idea is that the security systems put in place should, as much as possible, avoiding making it more difficult to access resources.

**Example** The example for this principle includes a confession. The university has implemented a multi-factor authentication mechanism for staff.<sup>13</sup> Unfortunately, there is a bug in the single sign-on which means that MFA is not remembered causing the system to re-prompt me at every *single* log in. A direct consequence of this inconvenience is that I've installed software on all my devices which automatically authenticates the MFA, bypassing, in part, the intended additional security.

The university through violating the principle of usability has made it more difficult for users to be secure than insecure. As predicted by the principle, the inconvenience leads straight to bypassing. Violation of this principle often usually has relatively minimal *visible* impacts, which results in the principle not being considered as often. The long-term implications are that what was an annoyance circumvented by your users, may become the cause of a major security breach long after the security feature was implemented.

---

<sup>13</sup>coming soon to students

draft (2022/02/11 11:01:12)

Other potentially useful principles:

- Principle of Defense in Depth
- Principle of Separation of Duties

## 4 Practices of Secure Software

### 4.1 Encryption

### 4.2 Sanitization

### 4.3 DoS Protection

### 4.4 Dependency Management

### 4.5 Firewalls

## 5 Summary

hire or consult with an expert

## A Original Security Design Principles

### Saltzer and Schroeder

1. Economy of mechanism ..... Principle of KISS
2. Fail-safe defaults ..... Principle of Least Privilege
3. Complete mediation ..... Not covered  
Access to resources must *always* be authorised.
4. Open design ..... Principle of Open Design
5. Separation of privilege ..... Not covered  
No one user account or role should hold too much power.  
Consider multi-role authentication where appropriate.
6. Least privilege ..... Principle of Least Privilege
7. Least common mechanism ..... Not covered  
Minimise the amount of resources shared between users.
8. Psychological acceptability ..... Principle of Usability

## Gasser

1. Consider Security from the Start ..... Implicit
2. Anticipate Future Security Requirements
3. Minimise and Isolate Security Controls
4. Enforce Least Privilege ..... Principle of Least Privilege
5. Structure the Security-Relevant Functions
6. Make Security Friendly ..... Principle of Usability
7. Do Not Depend on Secrecy for Security ..... Principle of Open Design

## Viega and McGeaw

1. Secure the Weakest Link
2. Practice Defense in Depth
3. Fail Securely ..... Principle of Failing Securely
4. Follow the Principle of Least Privilege ..... Principle of Least Privilege
5. Compartmentalise
6. Keep It Simple ..... Principle of KISS
7. Promote Privacy
8. Remember That Hiding Secrets is Hard
9. Be Reluctant to Trust
10. Use Your Community Resources

# Layered Architecture

Software Architecture

February 28, 2022

Brae Webb

## 1 Introduction

In the beginning there was the *big ball of mud*. The ball of mud is an architectural style identified by its lack of architectural style [15]. In a ball of mud architecture, all components of the system are allowed to communicate. If your GUI code wants to ask the database a question, it will write an SQL query and ask it. Likewise, if the code which primarily talks to the database decides your GUI needs to be updated a particular way, it will make it so.

The ball of mud style is a challenging system to work under. Modifications can come from any direction at any time. Akin to a program which primarily uses global variables, it is hard, if not impossible, to understand everything that is happening or could happen.

**TODO: Monolith is technically before layered architecture and monolith  $\neq$  big ball of mud**

### Aside

Code examples in these notes are works of fiction. Any resemblance to a working code is pure coincidence. Having said that, python-esque syntax is often used for its brevity. We expect that you can take away the important points from the code examples without getting distracted in the details.

```
1 import gui
2 import database

4 button = gui.make_button("Click me to add to counter")
5 button.onclick(e =>
6     database.query("INSERT INTO clicks (time) VALUES {{e.time}}"))
```

Figure 1: A small example of a *big ball of mud* architecture. This type of software is fine, even preferred, for smaller projects. However, it does not work well at scale.

The first architectural style we will investigate is a layered architecture. Layered architecture (also called multi-tier or tiered architecture) partitions software into specialised components and restricts how those components can communicate with each other. A layered architecture creates superficial boundaries between the software components, or layers. Often component boundaries aren't enforced by the technology but by architectural policy.

The creation of these boundaries provides the beginnings of some control over what your software is allowed to do. Communication between the component boundaries is done via well-specified *contracts*. The use of contracts results in each layer knowing precisely how it can be interacted with. Furthermore, when a layer needs to be replaced or rewritten, it can be safely substituted with a layer fulfilling the contract.



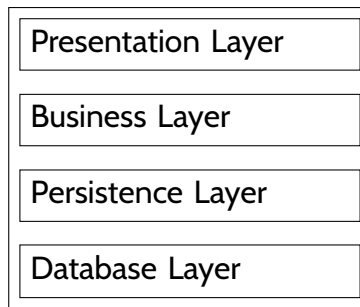


Figure 2: The traditional specialised components of a layered architecture.

## 2 Standard Form

The traditional components of a layered architecture are seen in Figure 2. This style of layered architecture is the four-tier architecture. Here, our system is composed of a presentation layer, business layer, persistence layer, and database layer.

The presentation layer takes data and formats it in a way that is sensible for humans. For command line applications, the presentation layer would accept user input and print formatted messages for the user. For traditional GUI applications, the presentation layer would use a GUI library to communicate with the user.

The business layer is the logic central to the application. The interface to the business layer is events or queries triggered by the presentation layer. It's the responsibility of the business layer to determine the data updates or queries required to fulfil the event or query.

The persistence layer is essentially a wrapper over the database, allowing more abstract data updates or queries to be made by the business layer. One advantage of the persistence layer is it enables the database to be swapped out easily.

Finally, the database layer is normally a commercial database application like MySQL, Postgres, etc. which is populated with data specific to the software. Figure 3 is a over-engineered example of a layered architecture.

```
» cat presentation.code
1 import gui
2 import business
3
4 button = gui.make_button("Click me to add to counter")
5 button.onclick(business.click)
```

```
» cat business.code
1 import persistence
2
3 def click():
4     persistence.click_counts.add(1)
```

Figure 3: An unnecessarily complicated example of software components separated into the standard layered form.

```

» cat persistence.code
1 import db
3 class ClickCounter:
4     clicks = 0
6     def constructor():
7         clicks = db.query("SELECT COUNT(*) FROM clicks")
9     def get_click():
10        return clicks
12    def add(amount):
13        db.query("INSERT INTO clicks (time) VALUES {{time.now}}")
15 click_counts = ClickCounter()

```

Figure 3: An unnecessarily complicated example of software components separated into the standard layered form.

One of the key benefits afforded by a well designed layered architecture is each layer should be interchangeable. A typical example is an application which starts as a command line application but can later be adapted to a GUI application by just replacing the presentation layer.

### 3 Deployment Variations

While the layered architecture is popular with software deployed on one machine (a non-distributed system), layered architectures are also often deployed to separate machines.

Each layer can be deployed to separate binaries on separate machines. The most common variant of distributed deployment is separating the database layer. Since databases have well defined contracts and are language independent, the database layer is a natural first choice for physical separation.

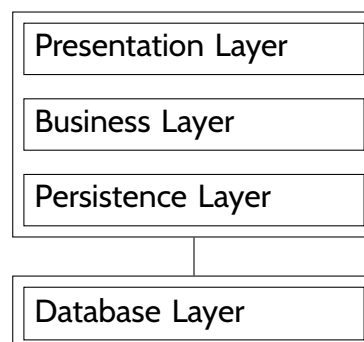


Figure 4: Traditional layered architecture with a separately deployed database.

Of course, in a well designed system, any layer of the system could be physically separated with minimal difficulty. The presentation is another common target. Physically separating the presentation layer gives users the ability to only install the presentation layer and allow communication to other software components to occur via network communication.

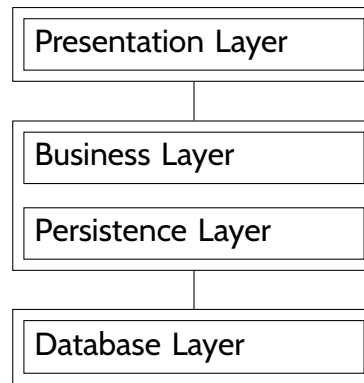


Figure 5: Traditional layered architecture with a separately deployed database and presentation layer.

This deployment form is very typical of web applications. The presentation layer is deployed as a HTML/JavaScript application which makes network requests to the remote business layer. The business layer then validates requests and makes any appropriate data updates.

A much more uncommon deployment variation (Figure 6) separates the presentation layer and business layer from the persistence layer and database layer. An updated version of our running example is given in Figure 7, the presentation layer remains the same but the communication between the business and persistence is now via REST.<sup>14</sup>

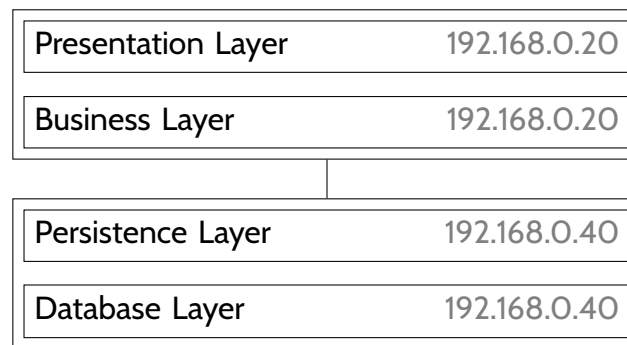


Figure 6: A contrived example of a deployment variation.

```

» cat business.code
1 import http
3 def click():
4     http.post(
5         address="192.168.0.40",
6         endpoint="/click/add",
7         payload=1
8     )
  
```

Figure 7: Code adapted for the contrived example of a deployment variation.

<sup>14</sup><https://restfulapi.net/>

```

» cat persistence.code
1 import db
2 import http
3
4 class ClickCounter:
5     ... # as above
6
7 click_counts = ClickCounter()
8
9 http.on(
10     method="post",
11     endpoint="/click/add",
12     action=(payload => click_counts.add(payload))
13 )

```

Figure 7: Code adapted for the contrived example of a deployment variation.

## 4 Closed/Open Layers

Separating software into layers helps to increase the modularity and isolation of distinct components. But, of course, components must communicate via their specified contracts, otherwise they wouldn't be particularly useful. Flows of communication between components are categorized as either *open* or *closed*. A layer, by default, is considered *closed*. Closed layers prevent the direct communication between their adjacent layers. Figure 8 shows the communication channels (as arrows) in a completely closed architecture.

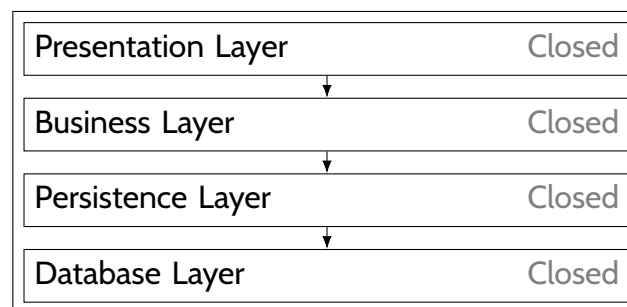


Figure 8: All layers closed requiring communication to pass through every layer.

An architecture where all layers are closed enables maximum isolation. A change to the communication contracts of any layer will require changes to at most one other layer. However, there are a number of situations where an *open* layer can be useful. Open layers do not require communication to pass through, communication can occur 'around' the layer.

**TODO:** Thinking about it, I'm not sure that open and closed layers is worth teaching. I think variations in the physical structures of layers which enables sidecars, etc from Bass would be better. It's more flexible and enables more obvious examples, i.e. a logging service sidecar

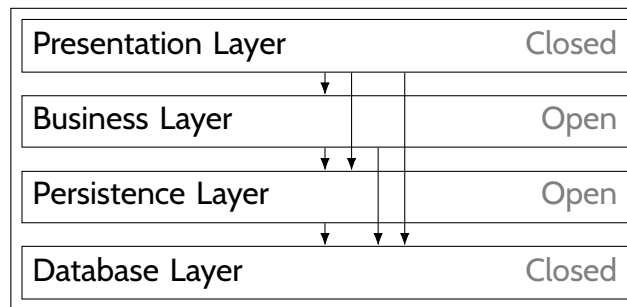


Figure 9: A wolf in layer's clothing [16]

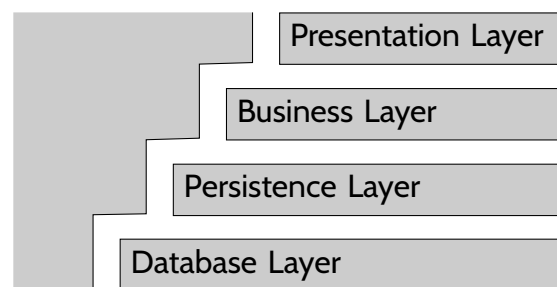


Figure 10: A more complicated layered architecture [16]

TODO: Figure is an example of a variation on open/closed layer model (fig 13.2 in bass - reconstruction in progress)

---

# Architectural Views

Software Architecture

February 28, 2022

Richard Thomas & Brae Webb

---

## 1 Introduction

Understanding software is hard. It is often claimed that reading code is harder than writing code<sup>15</sup>. This principle is used to explain a programmers' innate desire to constantly rewrite their code from scratch. If software is hard to understand, then software architecture is near impossible. Fortunately, architects have developed a number of techniques to manage this complexity.

A software architecture consists of many dimensions. Programming languages, communication protocols, the operating systems and hardware used, virtualisation used, and the code itself are a subset of the many dimensions which comprise a software architecture. Asking a programmer's monkey brain to understand, communicate, or document every dimension at once is needlessly cruel. This is where architectural views come in.

Architectural views, or architectural projections, are a representation of one or more related aspects of a software architecture. Views allow us to focus on a particular slice of our multi-dimensional software architecture, ignoring other irrelevant slices. For example, if we are interested in applying a security patch to our software then we are only interested in the view which tells us which software packages are used on each host machine.

The successful implementation of any architecture relies on the ability for the architectural views to be disseminated, understood, and implemented. For some organisations, the software is simple enough, or the team small enough, that the design can be communicated through word of mouth. As software becomes increasingly complex and developers number in the thousands, it is critical for design to be communicated as effectively as possible. In addition to facilitating communication, architectural views also enable architectural policies to be designed and implemented.

## 2 4+1 Views

Philippe Kruchten was one of the earliest to advocate the idea of using views to design and document software architectures. In "4+1 View Model of Software Architecture" [19] he describes five different views. These are logical, process, development, physical, and scenario views, which are summarised below.

**Logical** How functionality is implemented, using class and state diagrams.

**Process** Runtime behaviour, including concurrency, distribution, performance and scalability. Sequence, communication and activity diagrams are used to describe this view.

**Development** The software structure from a developer's perspective, using package and component diagrams. This is also known as the implementation view.

**Physical** The hardware environment and deployment of software components. This is also known as the deployment view.

**Scenario** The key usage scenarios that demonstrate how the architecture delivers the functional requirements. This is the '+1' view as it is used to validate the software architecture. This is also known as the use case view, as high-level use case diagrams are used to outline the key use cases and actors.

---

<sup>15</sup>Though evidence suggests that an ability to read and reason about code is necessary to learn how to program well [17] [18].

The experience which led to the development the 4+1 View Model was developing the air traffic control management system for Canada. The system provides an integrated air traffic control system for the entire Canadian airspace. This airspace is about double the size of the Australian airspace and borders the two busiest airspaces in the world. The project's architecture was designed by a team of three people led by Philippe. Development was done by a team of 2500 developers from two large consulting companies. The project was delivered on-time and on-budget, with three incremental releases in less than three years<sup>16</sup>. This project also developed many of the ideas that led to the Rational Unified Process [21].

### 3 *Software Architecture in Practice Views*

The seminal architecture book, *Software Architecture in Practice* [22], categorises architectural views into three groups. These three groups each answer different questions about the architecture, specifically:

**Module Views** How implementation components of a system are structured and depended upon.

**Component-and-connector Views** How individual components communicate with each other.

**Allocation Views** How the components are allocated to personnel, file stores, hardware, etc.

#### 3.1 Module Views

Module views are composed of modules, which are static units of functionality such as classes, functions, packages, or whole programs. The defining characteristic of a module is that it represents software responsible for some well-defined functionality. For example, a class which converts JSON to XML would be considered a module, as would a function which performs the same task.

The primary function of module views is to communicate the dependencies of a module. Rarely does software work completely in isolation, often it is constructed with implicit or explicit dependencies. A module which converts JSON to XML might depend upon a module which parses JSON and a module which can format XML. Module views make these dependencies explicit.

Module views focus on the developer's perspective of how the software is implemented, rather than how it manifests itself when deployed in a computing environment.

#### 3.2 Component-and-Connector Views

Component-and-connector views focus on the structures that deliver the runtime, or dynamic behaviour of a system. Components are units which perform some computation or operation at runtime. These components could overlap with the modules of a module view but are often at a higher level of abstraction. The focus of component-and-connector views is how these components communicate at runtime. Runtime communication is the connector of components. For example, a service which registers users to a website might have new registrations communicated via a [REST](#)<sup>17</sup> request. The service may then communicate the new user information to a database via SQL queries.

When we look at software architecture, component-and-connector views are the most commonly used views. They are common because they contain runtime information which is not easily automatically extracted. Module views can be generated after the fact, i.e. it is easy enough for a project to generate a UML class diagram. (Simple tools will create an unreadably complex class diagram. Tagging important information in the source code, or manually removing small details is required to end up with readable diagrams.) Component-and-connector views are often maintained manually by architects and developers.

---

<sup>16</sup>Contrast this to the United States Federal Aviation Administration's Advanced Automation System project from a similar era. The original estimate was \$2.5 billion and fourteen years to implement. The project was effectively cancelled after twelve years. By then the estimate had almost tripled and the project was at least a decade behind schedule [20].

<sup>17</sup><https://www.ibm.com/cloud/learn/rest-apis>

```


import json
import xml

class JSONtoXML:
    def load(self, json_file):
        with open(json_file) as f:
            data = json.load(f)
            self.data = self.convert(data)

    def export(self, xml_file):
        xml.write(xml_file, data)

    def convert(self, data: JSON) -> XML:
        ...

```

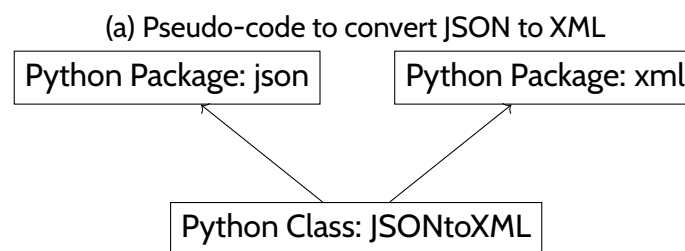

(b) An example of a module view which illustrates the dependencies of the `JSONtoXML` class

Figure 11: A simple module view of a JSON to XML program.

### 3.3 Allocation Views

According to Bass et al, allocation views map the software's structures to the system's non-software structures [22]. They include concepts such as who is developing which software elements, where are source files stored for different activities such as development and testing, and where are software elements executed. The first two points are important for project management and build management. The last point of how the software is executed on different processing nodes is important for architectural design. This is sometimes called the *deployment structure* or the software system's *physical architecture*.

Understanding the physical architecture (simplistically the hardware<sup>18</sup> on which the software is executed) is important when designing the software's *logical architecture*. Component-and-connector views describe the software's logical architecture. This design of the logical architecture must contain components that can be allocated appropriately to processing nodes, and these nodes must have communication links that enable the components to interact.

## 4 Sahara eCommerce Example

Sahara<sup>19</sup> eCommerce is an ambitious company who's prime business unit is an on-line store selling a wide range of products. They provide both web and mobile applications to deliver the shopping experience to customers.

<sup>18</sup>Whether it is virtualised or physical hardware

<sup>19</sup>Yes, that is intentionally a dry joke.



## 4.1 Architecturally Significant Requirements

*Architecturally significant requirements* (ASR) are functional or non-functional requirements, or constraints or principles, which influence the design of the system architecture. The structure of a software architecture has to be designed to ensure that the ASRs can be delivered.

Not all requirements for a system will be architecturally significant, but those that are need to be identified. Once ASRs are identified, an architecture needs to be designed to deliver them. This may require some research, and experimentation with prototypes, to determine which options are appropriate. Tests should be designed to verify that the architecture is delivering the ASRs. Ideally, these should be part of an automated test suite. This may not be possible for all tests. Regardless, the ASR tests should be executed frequently during development to provide assurance that the system will deliver the ASRs.

Inevitably, some ASRs will be discovered later in the project. The existing architecture will need to be evaluated to determine if it can deliver the new ASRs. If it can, new tests need to be added to the ASR test suite to verify delivery of the new ASRs. If the architecture is no longer suitable due to the new ASRs, a major redesign needs to be done to create a new, more suitable, architecture.

The architecturally significant requirements for the Sahara eCommerce system are:

- Customers can start shopping on one device and continue on another device. (e.g. Add a product to their shopping cart while browsing on their computer when they are bored at school. Checkout their shopping cart from their mobile phone on their way home on the bus.)
- The system must be scalable. It must cater for peaks in demand (e.g. Cyber Monday and Singles Day). It must cater for an unknown distribution of customers accessing the on-line store through web or mobile applications.
- The system must be robust. The system must continue to operate if a server fails. It must be able to recover quickly from sub-system failures.
- The system must have high availability. Target availability is “four nines”<sup>20</sup> up time.

The following sections will describe the physical and software architecture for this system, and demonstrate how it delivers these ASRs.

## 4.2 Allocation View

Figure 12 uses a UML deployment diagram as a visual representation of the physical architecture of the system as part of the allocation view. The diagram also shows some of the important software components that are deployed onto parts of the physical architecture. For simplicity, details such as load balancing and failover are not shown in this example.

There are both web and mobile applications that customers use to shop at the store. A J2EE server (e.g. TomEE<sup>21</sup>), running on a web server hardware platform, handles browser requests from customers, using the HTTPS protocol over the Internet. A JavaScript module called `ProductAnimator` is downloaded to the customer’s browser to allow them to see interactive 3d views of products. The `ProductBrowsing` and `ShoppingCartView` components run on the J2EE server, providing those aspects of the user interaction. The J2EE server uses RMI<sup>22</sup> over a network connection to an application server.

The application server provides the shared logic of the on-line store. This supports implementing the functional requirement that a customer can start shopping on one device and continue on another. Running the application server on its own device allows easier scalability of the system. The application server

<sup>20</sup>A number of nines (e.g. four nines) is a common way to measure availability. It represents the percentage of time the system is “up”. Four nines means the system is available 99.99% of the time, or it is not available for less than one hour per year.

<sup>21</sup><https://tomee.apache.org/>

<sup>22</sup>Remote Method Invocation

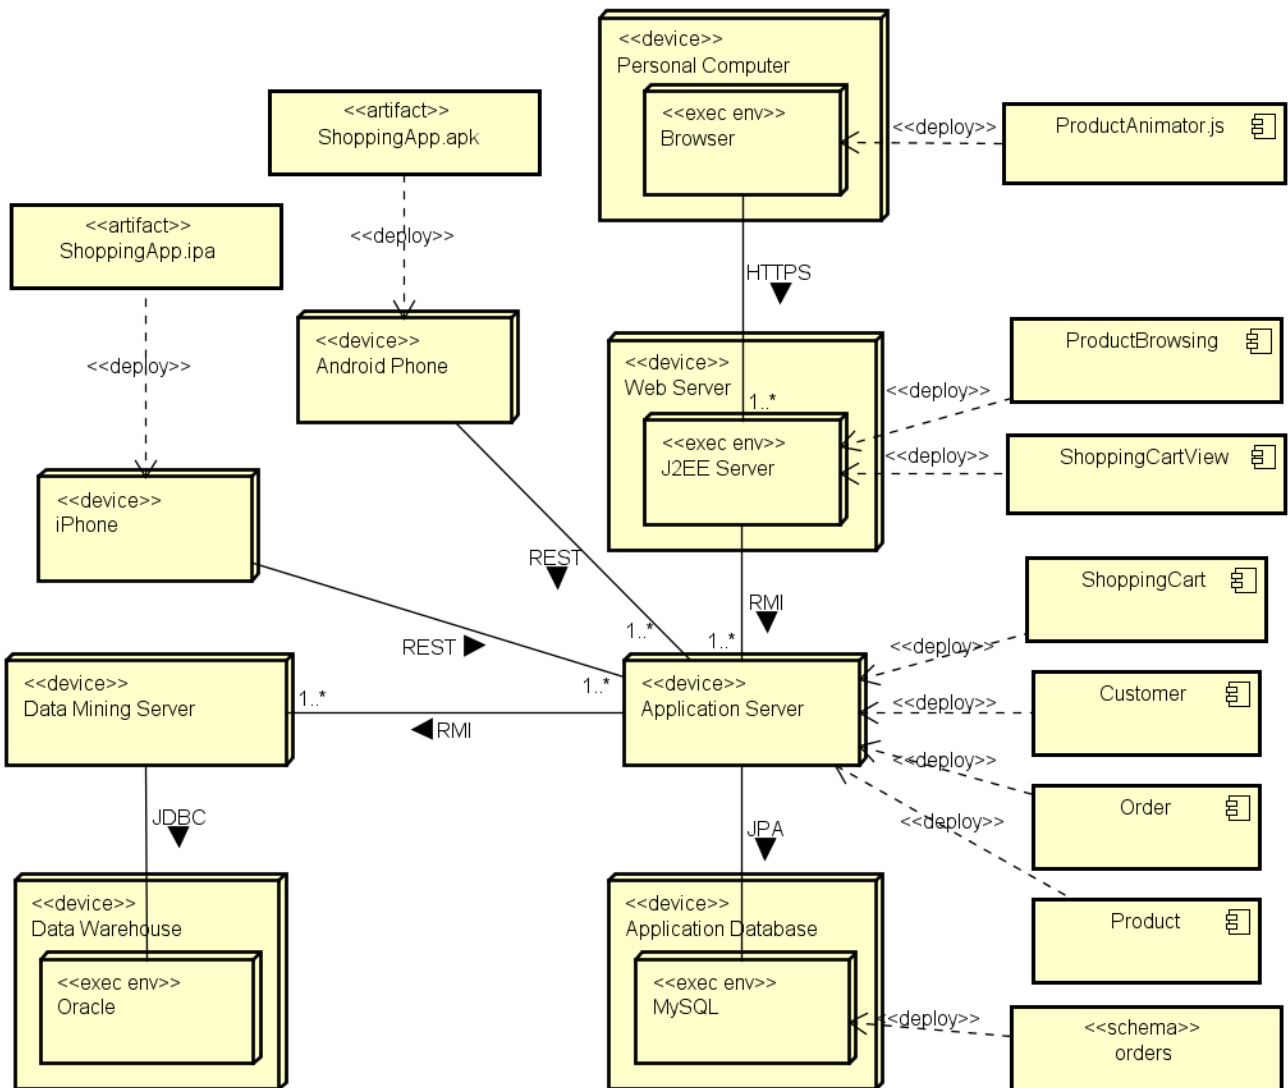


Figure 12: Example physical architecture for the Sahara eCommerce system.

could be replicated on multiple devices to handle requests from different sources, without duplicating unneeded web or database logic. Examples of components that would run on the application server are Customer, ShoppingCart, Order and Product.

The application server uses JPA<sup>23</sup> over a network connection to communicate with the application database running on a separate server. The orders schema is an example of one of the tables that would be created in the application database. The application server also uses RMI over a network connection to communicate with a data mining server.

The data mining server uses JDBC<sup>24</sup> over a network connection to a server running the data warehouse. The mobile applications run on their respective phone environments and use REST API calls over the Internet to interact with application server.

**Note**, for web applications the customer's computer and browser would only be shown in the deployment diagram if the software system downloads application logic that executes in the browser (e.g. JavaScript). In this example the ProductAnimator.js module is an important part of the application's functional requirements.

<sup>23</sup>Java Persistence API

<sup>24</sup>Java DataBase Connectivity

### 4.2.1 Deployment Diagram Notation

In the diagram, cube icons represent *nodes*. Nodes are computational resources that can execute software artifacts. Nodes may be «device»'s, representing hardware. They may also be «executionEnvironment»'s, representing software that provides an environment in which other software artifacts can be executed. (The keyword has been shortened to «exec env» in this example.) Execution environments need to be allocated to devices. In figure 12, Browser and J2EE Server are software environments running, respectively, on the hardware devices Personal Computer and Web Server.

The solid lines between nodes are *associations*, which represent communication paths. A communication path can represent a *physical connection* or *protocol*. Formally, a stereotype (e.g. «protocol») is used to distinguish the type of communication path. In figure 12, all communication paths are protocols so the stereotype is not included. The protocol name is used to indicate which one is being used on the communication path. The end of an association can indicate *multiplicity*. In a deployment diagram this is used to indicate that some nodes may be replicated (e.g. for performance or robustness). The '\*' symbol is used to indicate many instances may be involved.

The rectangles with a 'plug' icon in their top-right corner are *components*. Components are executable software which need to be deployed to a node on which they will run. The dashed dependency arrow, with the stereotype «deploy», indicates the node on which the component will be deployed for execution.

**Note**, this approach of showing components being deployed to nodes is an older style of UML. The current version of UML has the concept of *artifacts* being deployed to nodes. Artifacts can implement (manifest in UML terminology) components, which provides an additional layer of abstraction. Formally, components would be manifested by an artifact that is then deployed to a node. In figure 12, components are deployed directly to nodes to keep the diagram simple. UML provides multiple ways to indicate which artifacts are deployed on a node, e.g. a textual list of artifacts inside the node icon. The approach taken for a diagram should be chosen to aid readability and reduce clutter.

Artifacts are used in this diagram to represent software that has to be packaged (i.e. deployed through a manifest), which corresponds to the idea of an artifact in the note above. An artifact is represented by a rectangle with the «artifact» keyword and the name of the artifact that is created for deployment.

The «schema» stereotype indicates that the artifact is a database schema describing tables to be created in the database.

## 4.3 Component-and-Connector View

Figure 13 uses a UML component diagram as a visual representation of the logical components that deliver system behaviour as part of the component-and-connector view. It models the logical architecture of the components that allow customers to browse for products, add them to their shopping cart, and purchase them. To keep the example manageable, this is the only part of the system that is shown in this view.

As was shown in figure 12, the ProductBrowsing and ShoppingCartView components are deployed on the J2EE server. These two component provide the user interaction behaviour in the web application of browsing for products, adding them to the shopping cart, and purchasing the products.

The Product, ShoppingCart, Order and Customer components are deployed on the application server. These components deliver the logical behaviour of providing information about products, tracking what is in the shopping cart, and placing orders.

The ProductBrowsing component uses the *ProductInformation* and *ManageCart* interfaces. These two interfaces are realised (or implemented) by the Product and ShoppingCart components respectively. The ShoppingCartView component uses the *CartCheckout* interface, which is realised by the ShoppingCart component. These interfaces describe the communication pathways between the components on the different nodes of the physical architecture.

The ShoppingCart component uses the Product, Customer and Order components. At the programming level, there could be interfaces between these components which are not shown in this diagram.

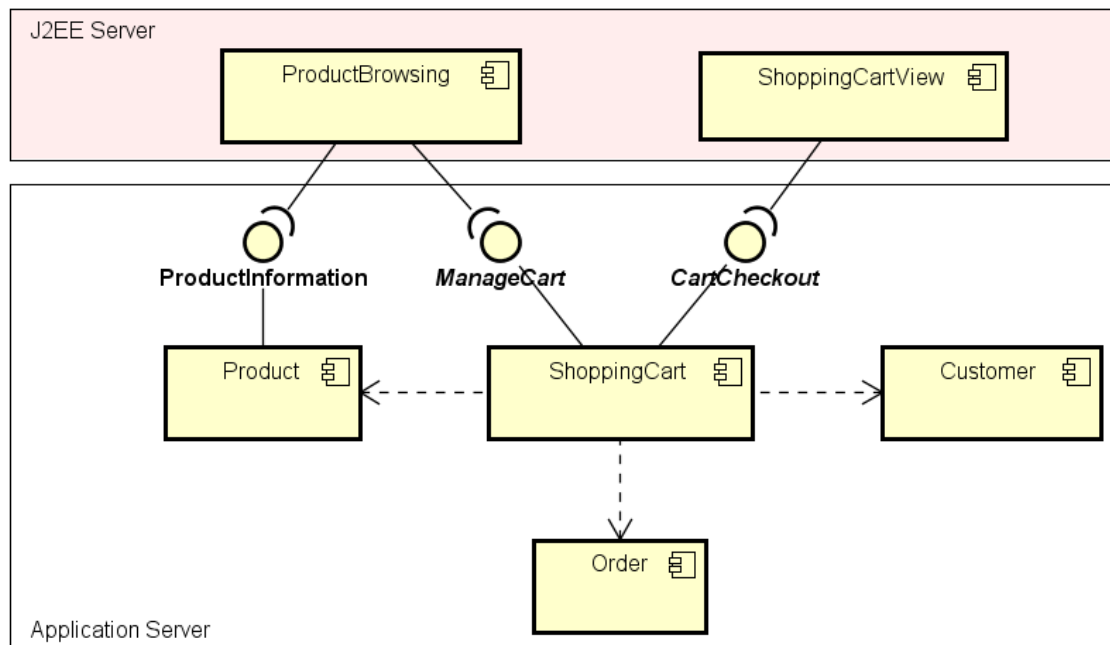


Figure 13: Example logical architecture – browsing for products and purchasing them.

The application database is not shown in this component diagram as all of its behaviour is defined within the application server's logic. JPA automates the process of saving and retrieving objects from a relational database. Consequently, the database is just a storage mechanism and does not implement any application logic. If the database implemented logic (e.g. through stored procedures and constraints), then components representing that logical behaviour would be included in this diagram.

### 4.3.1 Component Diagram Notation

As indicated in 4.2.1, rectangles with the 'plug' icon represent *components* in UML.

Circles represent *interfaces*, and are labelled with the interface's name. A line from a component to an interface circle indicates that the component provides (or realises) the interface.

Cups represent a *required interface*, and a line from a component to a cup indicates that the component depends on (or uses) the interface. This notation visualises the connection between components.

Dependency arrows point from a component whose runtime behaviour depends on behaviour provided by the target component.

Boxes around groups of components are *system boundary boxes*. They represent a logical grouping of elements in a UML diagram and can be given a name to describe the grouping. Colours and shading can be used to help distinguish between different logical groups.

### 4.3.2 Behaviour Structure

With complex systems it can be helpful to describe how the behaviour is implemented. UML sequence and communication diagrams can be used to show this behavioural structure. Figure 14 is a high-level sequence diagram describing how the `ProductBrowsing` component in the J2EE server collaborates with the `ShoppingCart` component on the application server to deliver the behaviour of a customer adding a product to their shopping cart. It also shows `ShoppingCart` component communicating with the application database.

Figure 14 does not provide much additional information that is not already shown or implied by figures 12 and 13. Normally sequence or communication diagrams would be used to describe behaviour that is not clear from other diagrams and descriptions. This can include complex interactions between modules, complex concurrency, real-time constraints, or latency constraints.

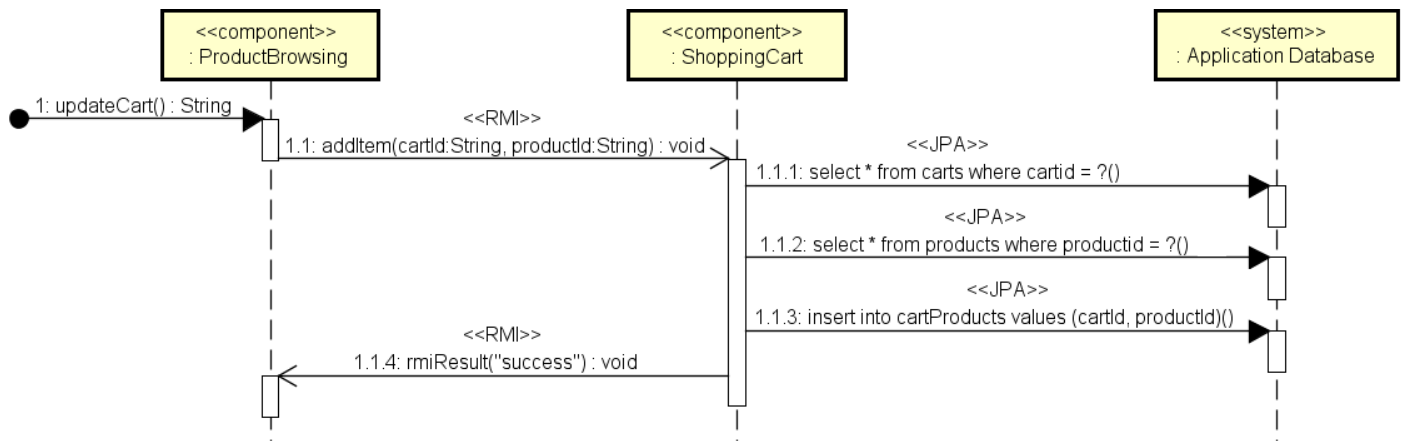


Figure 14: Example behavioural description – customer adding a product to their shopping cart.

For example, when Boeing was upgrading the combat control system of the F-111<sup>25</sup> for the Australian Airforce, they used a software architecture that used CORBA<sup>26</sup> as middleware. The implementation of the middleware caused a fixed delay in sending messages between components. From an architectural design perspective, it was important to document this delay and enforce a maximum delay on the time taken to complete any process. A sequence diagram can use constraints to indicate these types of real-time restrictions in your design.

### 4.3.3 Sequence Diagram Notation

Sequence diagrams are read from the top down. The top of the diagram represents the start of the scenario, and execution time progresses down the diagram. The bottom of the diagram is the end of the scenario. Duration constraints can be placed between messages indicating information like the maximum allowed time between the start and end of a message.

Rectangles with lines descending from them are *lifelines*. They represent an instance of a participant in the scenario being described. The name at the top of a lifeline describes the participant. In figure 14, these are components or the database system.

The horizontal lines are *messages* sent between participants. Messages use hierarchical numbers to indicate both nesting and sequence of messages. Message 1.1 is sent by message 1. Message 1.1.1 comes before message 1.1.2. Message 1 in figure 14 is a *found message*, meaning that the sender of the message is not shown in the diagram.

A closed arrowhead on a message (e.g. message 1) indicates that it is a synchronous message. An open arrowhead on a message (e.g. message 1.1) indicates that it is an asynchronous message. In figure 14, stereotypes have been placed on most messages to indicate the protocol used to send the message.

The vertical rectangles sitting on top of lifelines are *execution specifications*. They indicate when an instance is executing logic. For example, after the asynchronous message 1.1 is sent to the ShoppingCart component, message 1 finishes executing. When the synchronous message 1.1.1 is sent to the database, message 1.1 is still active as it is waiting for message 1.1.1 to finish before message 1.1 can continue to the next part of the logic.

## 4.4 Module View

Figure 15 uses a UML class diagram as a visual representation of the static structure of the classes that implement the ShoppingCart component as part of the module view. Usually only architecturally significant operations and attributes are shown. (e.g. Operations and attributes needed to understand relationships

<sup>25</sup><https://www.youtube.com/watch?v=xUcpZJE050s>

<sup>26</sup><https://www.ibm.com/docs/en/integration-bus/9.0.0?topic=corba-common-object-request-broker-architecture>

and behaviour in the component-and-connector view.) And for simplicity in this diagram, only the classes and interfaces related to adding items to a shopping cart and checking out are shown.

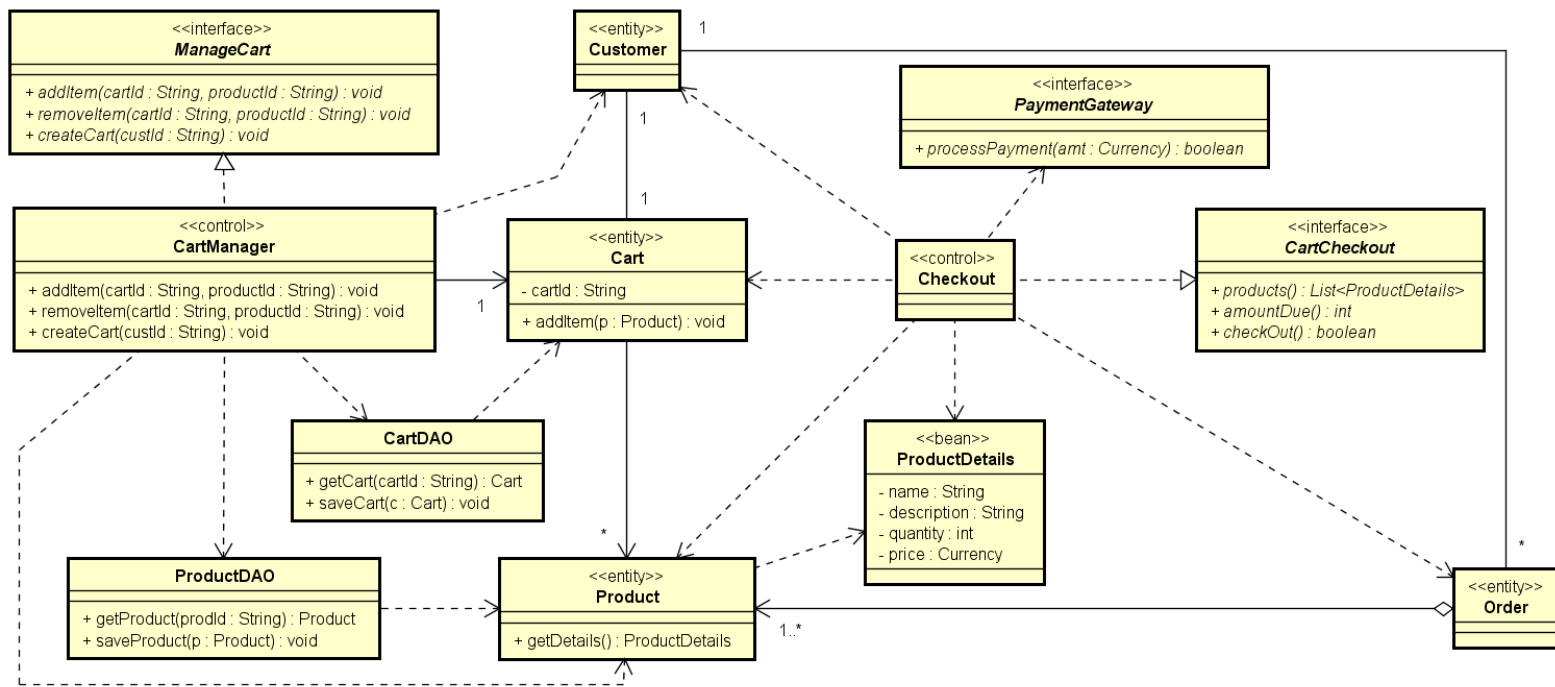


Figure 15: Example static structure for part of the shopping cart package in the class model.

The *CartManager* and *Checkout* control classes implement, respectively, the *ManageCart* and *CartCheckout* interfaces. These two classes implement the Façade design pattern and manage how adding products to a shopping cart and checking out are delivered by the classes in this package. Going back to the component and connector view (figure 13), when a customer, via their web browser, selects to add a product to their shopping cart, the *ProductBrowsing* component's logic uses the *ManageCart* interface's *addItem* operation to send a message to the *ShoppingCart* component.

In the implementation of the *ShoppingCart* component, the *CartManager* class uses the cart and product JPA data access objects (DAOs) to load the product details and the customer's shopping cart from the application database. The DAOs create *Product* and *Cart* entity objects, and *CartManager* adds the product to the cart. Once this is done the *CartDAO* is used to save the updated cart data into the database.

When a customer wants to checkout the products in their shopping cart, the *ShoppingCartView* component uses the *Checkout* interface's *products* operation to get a list of the product details to be displayed in the shopping cart. The *ProductDetails* class is a Java bean that is used to pass the data about each product to the *ShoppingCartView*. Once a customer decides to buy the products in their shopping cart, the *ShoppingCartView* sends the *checkout* message to the *ShoppingCart*. *Checkout* uses the *PaymentGateway* interface to process the payment.

#### 4.4.1 Class Diagram Notation

Formally in UML, rectangles represent *classifiers*. A *class* is one type of classifier. In a class diagram, a rectangle represents a class, unless a keyword is used to indicate that it is a different type of classifier. Classifier rectangles have three compartments. The top compartment contains its name and optionally includes a keyword, stereotypes and properties for the classifier. The middle compartment contains *attributes*. The bottom compartment contains *operations*.

Solid lines represent *associations*, which may optionally have an arrow indicating the direction of the relationship. An association indicates a structural relationship between classes. Typically this means that the target of an association will be an implicit attribute of the class. The end of an association can use *multiplicity* to indicate the number of objects of the class that may take part in the relationship.



A diamond on the end of an association indicates *aggregate* relationship. The diamond is on the end that is the aggregate, and the other end is the part. The diamond may be filled or not. A filled diamond represents *composition* in UML. This indicates 'ownership', where the aggregate controls the lifespan of the part. A hollow diamond, as in the relationship between `Order` and `Product`, indicates *aggregation* in UML. This is a weaker relationship than composition, as the aggregate does not control the lifespan of the part, but it still indicates a strong relationship between the classes.

A dashed line with an open arrowhead (e.g. from `CartManager` to `Product`) indicates that one classifier *depends on* (or *uses*) another. This is meant to indicate a transient relationship.

A dashed lines with a closed and hollow arrowhead (e.g. from `Checkout` to `CartCheckout`) indicates that the class is *realising* (or *implementing*) that interface.

*Italicised* names indicate an abstract classifier. Keywords are used to indicate the type of a classifier. In this example, the keyword `<<interface>>` indicates that the classifier is an interface. Stereotypes use the same notation as keywords. Three standard stereotypes for classes in UML are:

**«entity»** Represents a concept (*entity*) from the problem domain.

**«control»** Provides logical behaviour from the solution domain.

**«boundary»** Communicates with something outside of the system. (Not shown in diagram.)

An additional stereotype `«bean»` is used to indicate that the class is a Java bean.

#### 4.4.2 Detailed Behaviour Structure

Figure 16 is a detailed sequence showing how the class model in figure 15 implements the behaviour of a customer adding a product to their shopping cart. Like with the high-level sequence diagram, you would only provide detailed sequence diagrams to describe architecturally important details of the design.

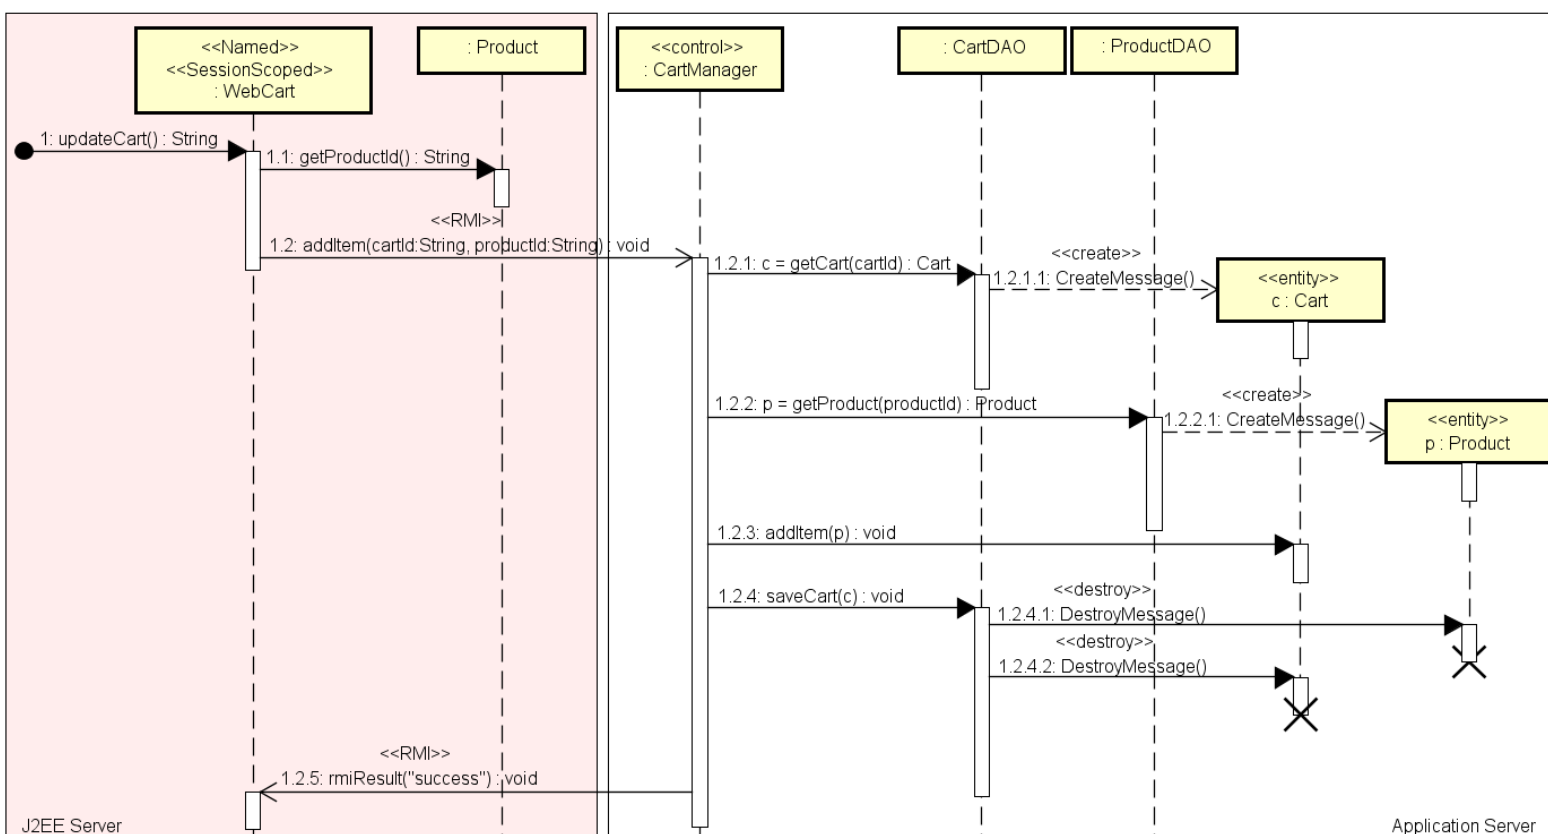


Figure 16: Example detailed sequence diagram showing the implementation of customer adding a product to their shopping cart.

The scenario starts with the JSF session-scoped bean `WebCart` receiving the `updateCart` message from the browser. `WebCart` retrieves the product id and uses the `ManageCart` interface to send it, along with the cart

id, to the ShoppingCart component on the application server. The ManageCart interface is implemented by the CartManager class in the ShoppingCart component.

The CartManager uses two JPA data access objects (DAOs) to retrieve the cart and product entities from the application database. Once the product is added to the cart, the CartDAO saves the updated cart details to the database. Upon successfully saving the updated cart, the CartManager notifies the WebCart object in the ProductBrowsing component in the J2EE server.

#### 4.4.3 Sequence Diagram Notation

The «create» and «destroy» stereotypes indicate when instances are created or destroyed. When an instance is created, its lifeline starts at the level of the sequence diagram that indicates the time when it is created. When an instance is destroyed, its lifeline finishes, with a large X. Lifelines that are at the top of the diagram indicate instances that existed before the start of the scenario. Lifelines that reach the bottom of the diagram indicate instances that still exist after the end of the scenario.

In figure 16, system boundary boxes are used to indicate which objects execute on which nodes from the deployment diagram.

### 4.5 Delivering Architecturally Significant Requirements

In section 4.1, four ASRs were identified for the Sahara eCommerce system. These were the ability to continue shopping on different devices, scalability, robustness and availability.

Implementing shared logic on an application server, as shown in figure 12, enables the web and mobile applications to share common logic and state. This delivers the functionality of allowing a customer to start shopping on one device and to continue on another device. It also minimises duplication of logic, as it is shared by the frontend applications.

Using separate servers for the web server, application server, application database, and data mining server, as shown in figure 12, provides more options to deliver scalability, robustness and availability. For scalability and performance, each computing environment can be optimised for the services it delivers. It also means that new servers can be deployed to target specific bottlenecks.

The system follows the [stateless architecture pattern](#)<sup>27</sup>. The web and mobile applications do not store any application state (e.g. products currently stored in the shopping cart). Every time the customer performs a transaction (e.g. viewing product details or adding a product to their shopping cart), the web or mobile application sends a message to the application server to perform the action. The application server then saves or loads data to or from the application database. This means that web and mobile applications can send messages to a different application server for each request. This facilitates scalability, robustness and availability. A new application server can be started to cater for increasing system load, or to replace a failed server. The stateless nature of the application server logic means that no data will be lost if a server fails, or if a frontend application accesses a different application server in the middle of a customer's shopping experience.

Having multiple application servers, and multiple application databases and data mining servers, means that if one server fails its load can be picked up by other servers. Automating the process of starting or restarting servers improves robustness and availability.

One challenge of a stateless architecture is providing a replicated database that contains up-to-date copies of the system's state. We will look at this issue later in the course.

By designing the architecture as a set of components running on different servers, it is also easier to migrate the application to cloud-based infrastructure. Figure 12 does not constrain the system to run on physical hardware hosted by Sahara eCommerce. Any of the nodes could be provisioned by a service offered by a cloud provider. Figure 28 in section 5.6 provides an example of a hybrid cloud solution. In that

<sup>27</sup><https://www.redhat.com/en/topics/cloud-native-apps/stateful-vs-stateless>



example, the on-line store components of the architecture run on hardware hosted by Sahara eCommerce. The data mining components run on Oracle's cloud infrastructure.

## 5 C4 Model


Simon Brown's C4 model provides a set of abstractions that describe the static structure of the software architecture [23]. The C4 model uses these abstractions in a hierarchical set of diagrams, each leading to finer levels of detail. The hierarchical structure is based on the idea that a software system is composed of containers, which are implemented by components, that are built using code.

**Software System** Something that delivers functional value to its users (human or other systems).

**Containers** Deployable 'block' of code or data that provides behaviour as part of the software system.

**Components** Encapsulate a group of related functionality, usually hidden behind a published interface.

**Code** Elements built from programming language constructs, e.g. classes, interfaces, functions, ....

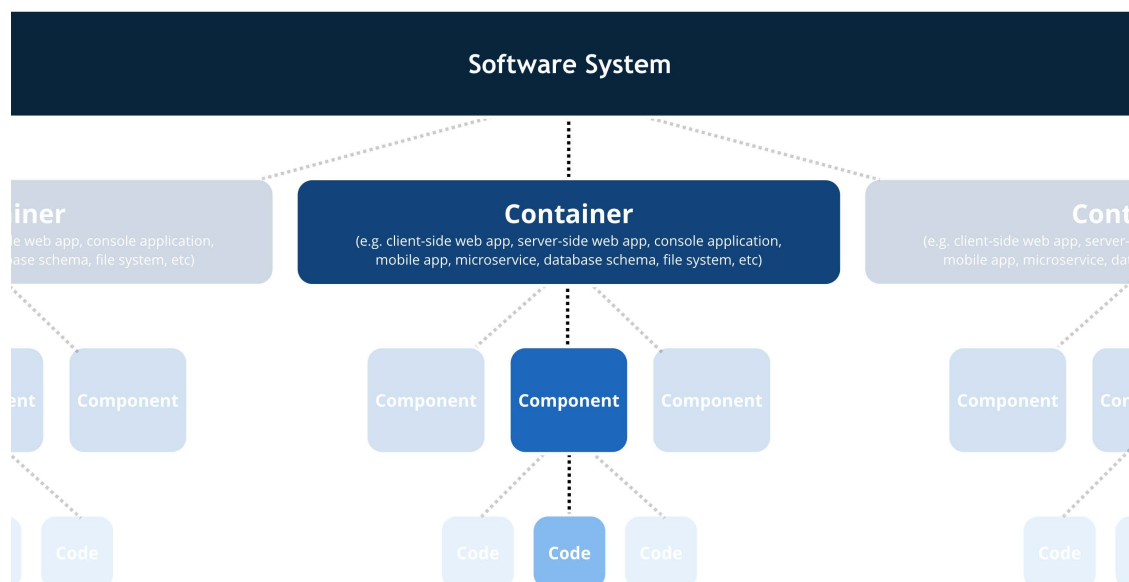

A **software system** is made up of one or more **containers** (web applications, mobile apps, desktop applications, databases, file systems, etc), each of which contains one or more **components**, which in turn are implemented by one or more **code** elements (e.g. classes, interfaces, objects, functions, etc).

Figure 17: Levels within the C4 model (figure 2.1 from [23]).

This leads to describing the static structure of software architecture through four levels of abstraction. Each level providing detail about parts of the previous level.

**Context** How the software system fits into the broader context around it.

**Containers** How the containers are connected to deliver system functionality.

**Components** How the components are structured to implement a container's behaviour.

**Code** How the code is structured to implement a component.

## 5.1 System Context

The system context provides the ‘big picture’ perspective of the software system. It describes the key purpose of the system, who uses it, and with which other systems it interacts. The context diagram is usually a simple block diagram. The software system being designed typically sits in the centre of the diagram surrounded by users and other systems. The intent is to set the context for thinking about the software system’s architecture. It can also be used to communicate basic structural ideas to non-technical stakeholders. Figure 18 is a context diagram for the Sahara eCommerce example from section 4.

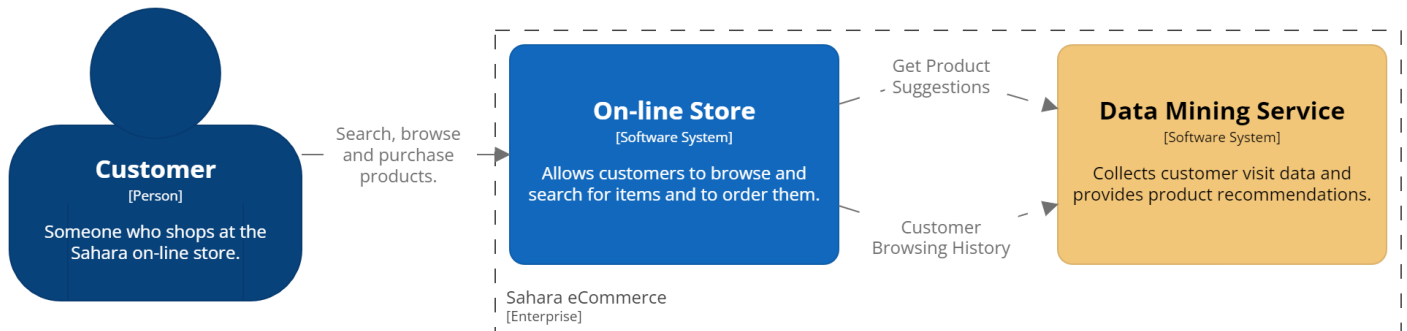


Figure 18: Context diagram for the Saraha eCommerce on-line store.

Figure 19 is the key to help interpret the context diagram. A key is important for C4 diagrams, as they do not have a formal syntax and specification like UML diagrams.



Figure 19: Context diagram key.

The context diagram situates the on-line store software system in the environment in which it will be used. There are customers who shop at the on-line store, which is part of Sahara eCommerce’s software ecosystem. The on-line store uses a data mining service that is also implemented by the company. The two key relationships between the on-line store and the data mining service are that the on-line store sends customer browsing data to the service, and that the on-line store requests the data mining service to recommend products for a customer.

In C4, arrows are used to indicate the main direction of the relationship, not the flow of data. So, in this example, the arrow points from the on-line store to the data mining service as it is the store that manages the communication.

In UML, a high-level use case diagram can be used to convey similar information to the C4 context diagram. Kruchten’s “4+1 View Model of Software Architecture” [19] uses this approach.

## 5.2 Containers

Container diagrams provide an overview of the software architecture. They describe the main structure of the software system and the technologies selected to implement these aspects of the system. Containers are ‘blocks’ of code that can be independently deployed and executed. Examples of containers are web or

mobile applications, databases, message buses, .... It is important to note that this is not a type of deployment diagram. Containers may be deployed on the same computing infrastructure or on different devices. While the container diagram does not explicitly show computing infrastructure, some of the infrastructure may be implied by the types of containers. Decisions about how containers are connected and communicate have major implications for how the components and code will be designed and deployed. Figure 20 is a container diagram for the on-line store.

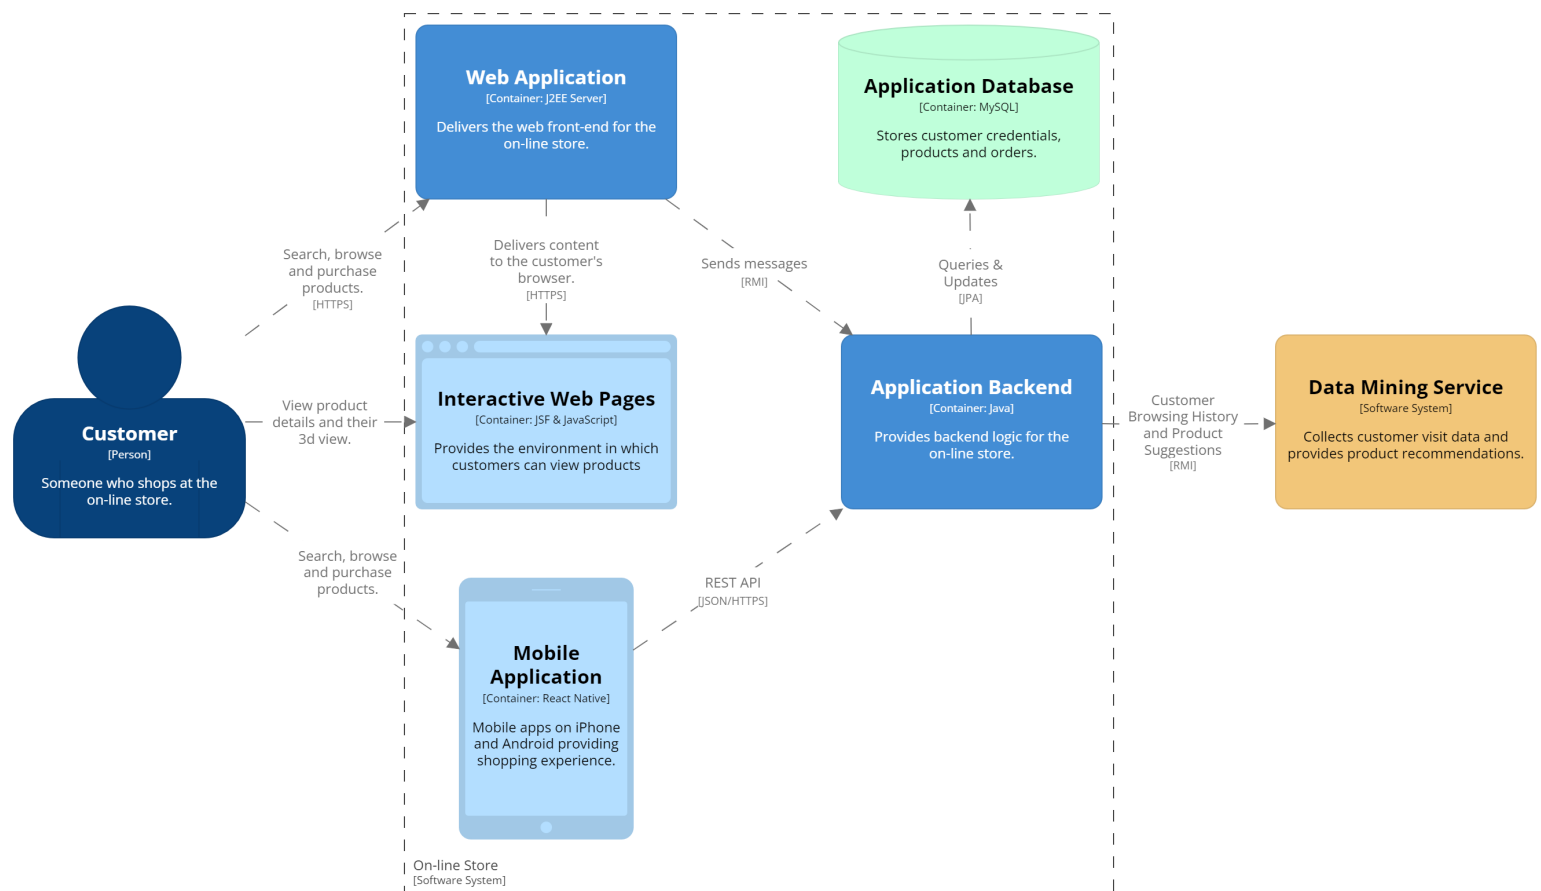


Figure 20: Container diagram for the on-line store software system.

Customers can access the on-line store through either web or mobile applications. The Interactive Web Pages container indicates that some of the web application's behaviour is delivered in a separate container. This indicates similar information as in figure 12, where the customer's computer and browser were included in the deployment diagram to show that a JavaScript component was to be deployed to run in the browser.

The web and mobile applications both communicate with the application backend, via different protocols, to provide the logical behaviour of the on-line store. The backend uses JPA to perform database operations on the application's database.

To provide a link to the context diagram, a container diagram usually shows which containers communicate with which external elements. The text inside the square brackets in a container, and on a relationship, indicates the technology used to implement that container or relationship.

While a container diagram does not explicitly show computing infrastructure, some of it can be implied by the types of containers in the diagram. Clearly, the mobile app and the code running in the interactive web pages have to be separate computing platforms to the rest of the on-line store's software system.

Colours and icons can be used to provide further information in the diagrams. The diagram key in figure 21 explains the purpose of each icon and colour. UML also allows you to use icons and colours to add further information to a model, it is just difficult to do in many UML modelling tools.

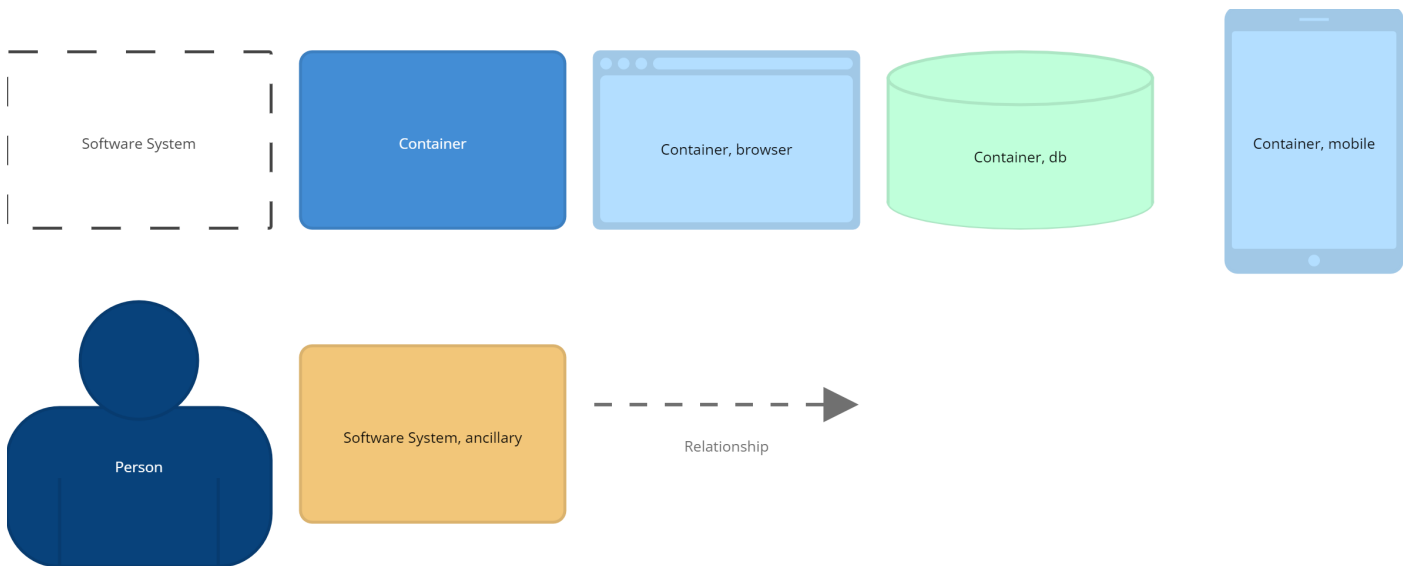


Figure 21: Container diagram key.

The data mining service software system (figure 22) has three main containers.

**Data Mining Interface** provides the interface used to interact with the data mining service. It accepts data to store for future data mining. It returns suggestions based on requests from external systems, such as the on-line store.

**Data Mining Process** performs the data mining logic.

**Data Warehouse** stores the data and provides an SQL-based query system to manipulate the data.

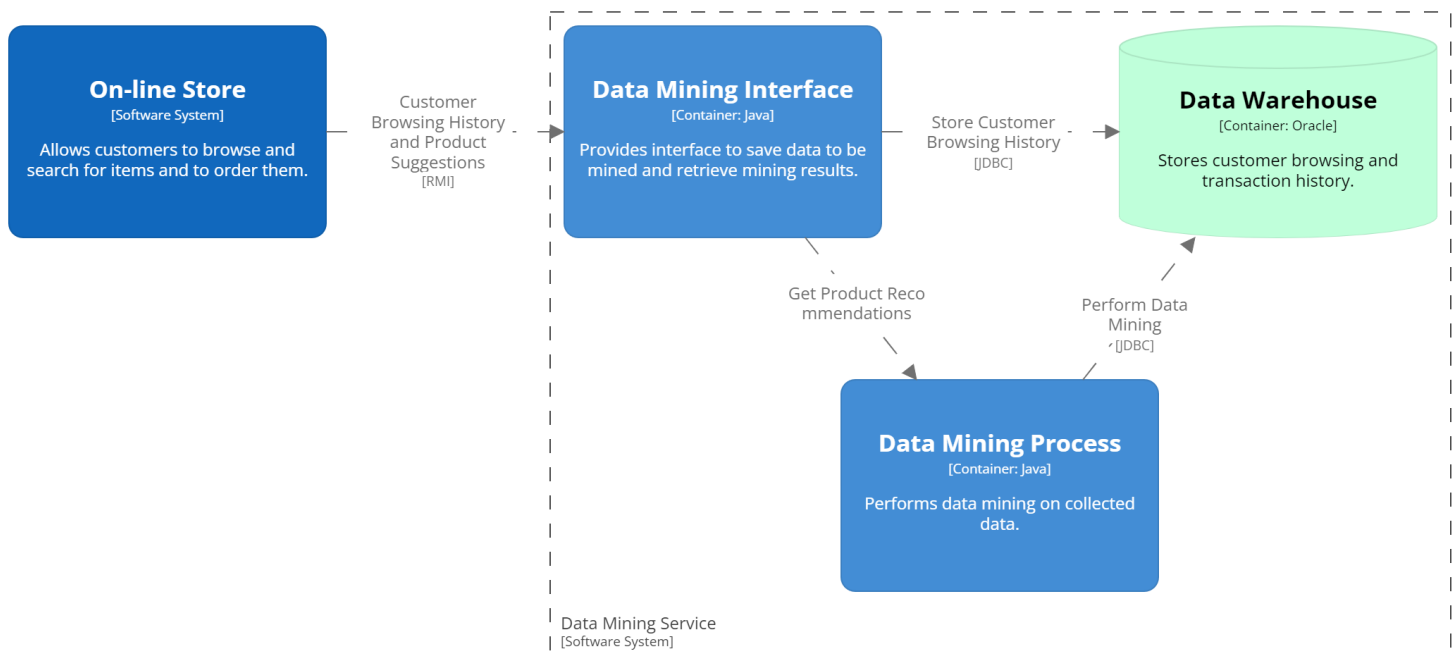


Figure 22: Container diagram for the data mining service software system.

## 5.3 Components

Component diagrams describe the major parts of containers and how they are connected. Components should describe their important responsibilities and the technology used to implement them (e.g. using React to implement a web frontend component). Like a container diagram, a component diagram can include elements from higher level diagrams to provide context of how the components interact with elements outside of the container.

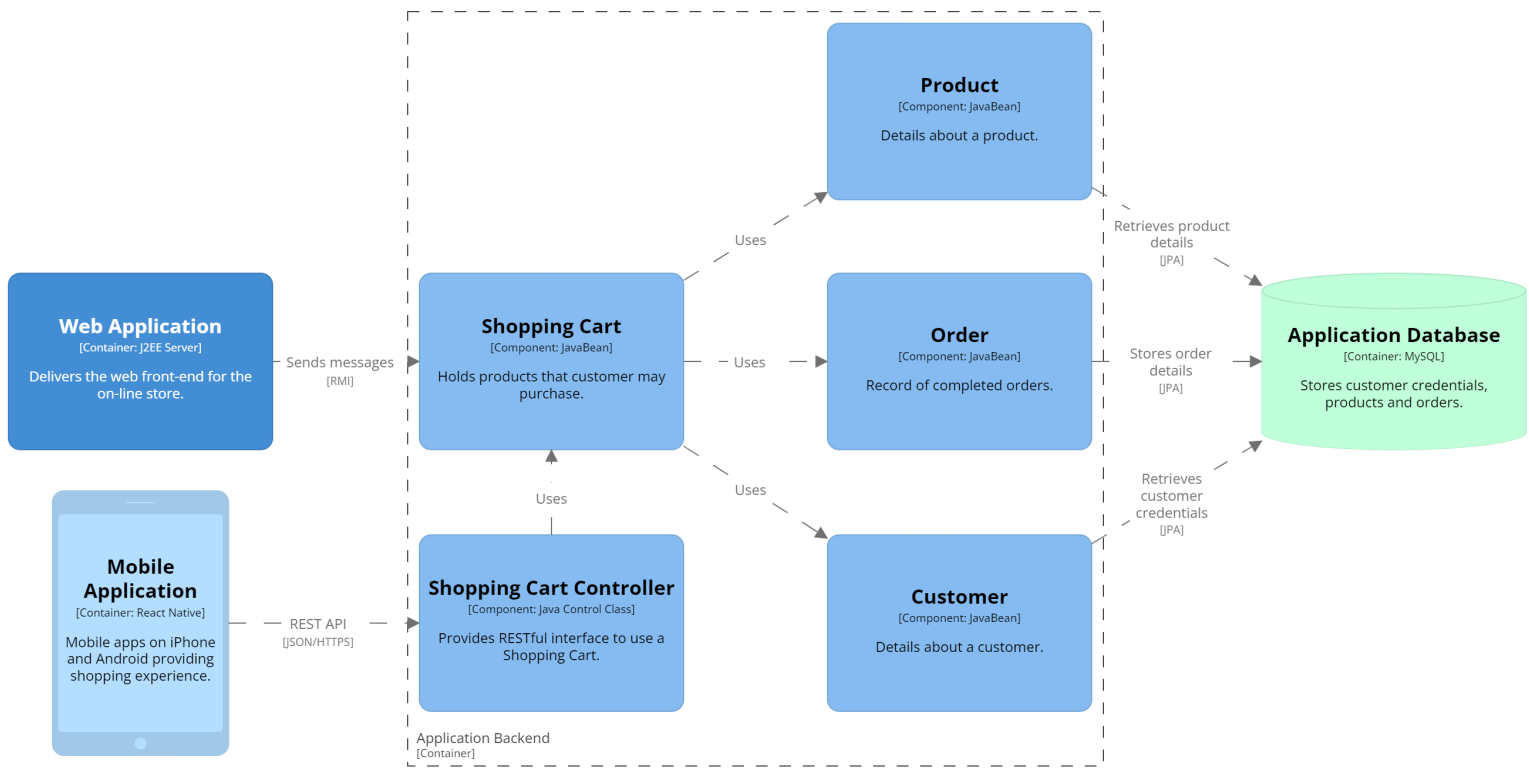


Figure 23: Component diagram for the application backend container.

In figure 23, the application backend is divided into five main components. The Shopping Cart component provides the backend logic of implementing a shopping cart. The web application interacts with the Shopping Cart component via RMI. The Shopping Cart component would provide interfaces for this interaction. The mobile applications use a REST API provided by the Shopping Cart Controller component to interact with the Shopping Cart. Shopping Cart uses the Product, Order and Customer components to deliver its behaviour. These are all implemented as Java beans.

The Product, Order and Customer components use JPA to retrieve and store data in the application database. (As indicated in section 4.3, only the components related to managing the shopping cart are shown in this example.)

Figure 24, shows the icons and colours used to represent different elements in the component diagrams.

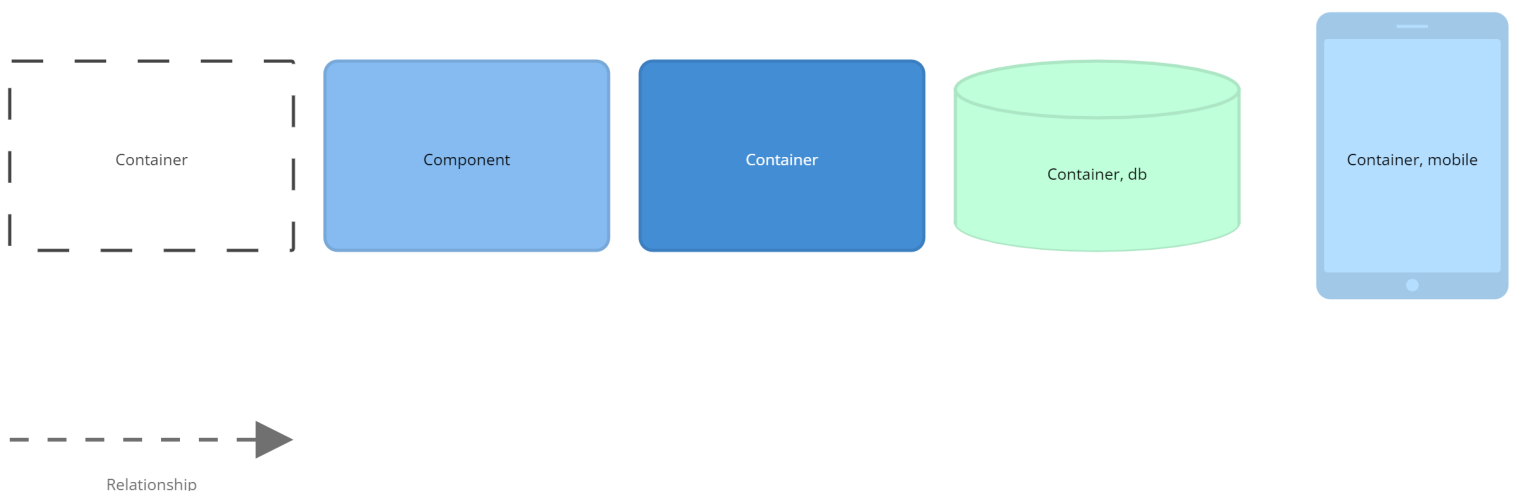


Figure 24: Component diagram key.

Figure 25 shows the components that provide the frontend behaviour of browsing for products, adding them to the shopping cart, and purchasing them.

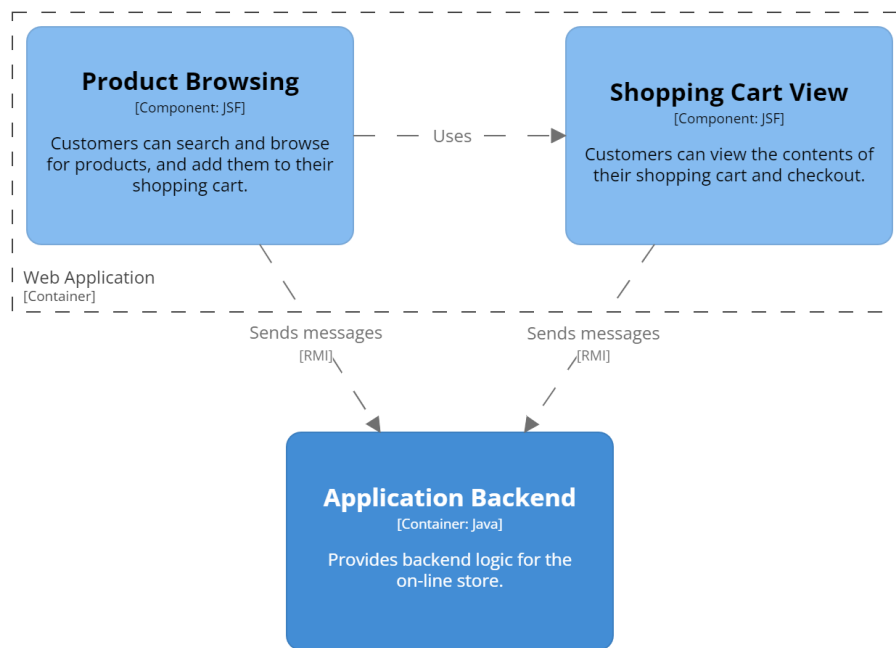


Figure 25: Component diagram for the web application container.

Figure 26, shows that the `Product Animator` component is downloaded from the web application to the customer's browser and that it is implemented in JavaScript. This provides similar information about the `Product Animator` component, as described in section 4.2.

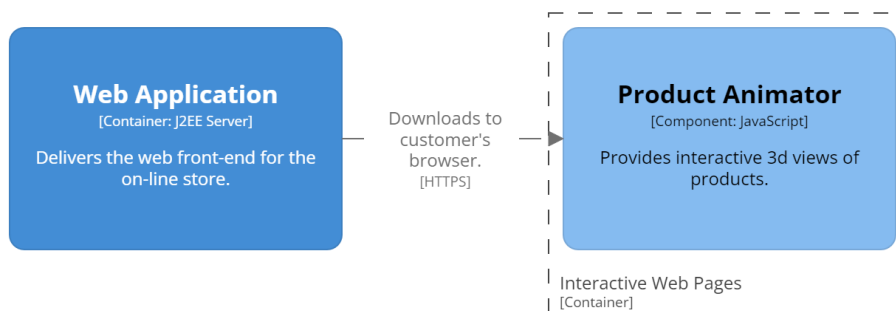


Figure 26: Component diagram for the interactive web pages container.

### 5.3.1 Component Diagram Detail

There may be some components that are important parts of the software design, but which may not necessarily be included in component diagrams. For example, a logging component is an important part of many software systems. But, due to the nature of a logging component, most other components will use it. Adding it to component diagrams will often clutter the diagrams without adding much useful information. Usually it is better to add a note indicating which logging component is used in the system. If it is helpful to indicate which components use the logging component, it may be better to colour code these components or use an icon to represent that they use the logging component.

## 5.4 Code

The code-level diagrams describe the structure of the code that implements a component. The intent is to provide a visual representation of the important aspects of the code's structure. Rarely do you need to

provide all the detail that replicates the source code. (The source code could be considered a fifth level to the C4 model.)

The C4 model suggests using diagrams appropriate to your programming paradigm. Assuming the implementation is in an object-oriented language, a UML class diagram would be an appropriate way to model the design of the code. Figure 15, from section 4.4, would be an example class diagram of how the Shopping Cart component is implemented.

## 5.5 Dynamic

Dynamic diagrams in C4 are similar to UML communication diagrams. (Communication and sequence diagrams are types of interaction diagrams. They show the same information but with different visual emphasis. Sequence diagrams focus on the time or ordered sequence of events that occur in a scenario. Communication diagrams focus on the links and extent of communication between objects.)

As was mentioned about behavioural structures in sections 4.3.2 and 4.4.2, dynamic diagrams are usually only provided to explain how the architecture delivers complex behaviour.

Figure 27 provides an overview of how the Product Browsing component in the Web Application container collaborates with the Shopping Cart component in the Application Backend container to deliver the behaviour of a customer adding a product to their shopping cart. It also shows the communication between the Shopping Cart component and the application database.



Figure 27: Dynamic diagram for adding a product to the customer's shopping cart.

If the information is useful, a more detailed dynamic diagram, like the detailed sequence diagram in figure 16, can be provided. Sequence diagrams can be used instead of C4 dynamic diagrams, if the order of events is important.

## 5.6 Deployment

While not one of the “four C’s”, deployment diagrams are important for most systems. They describe the physical architecture or infrastructure on which the system will be deployed. It shows which containers will run on which computing platforms (*deployment nodes*). Deployment nodes can be nested, as shown in figure 28. They may also contain infrastructure nodes or software system instances<sup>28</sup>.

Figure 28 is an example C4 deployment diagram for the Sahara eCommerce system. It takes a slightly different approach to the physical architecture than was shown in figure 12. It shows that the on-line store software system runs in Sahara's data centre. The data mining service runs on Oracle's cloud infrastructure. This approach of a system that uses cloud services for some of its implementation is called a *hybrid cloud* application. There are still the apps running on mobile devices and the code running in the customer's browser.

Like UML, a software environment is embedded in the hardware environment on which it runs. The web application runs in an Apache TomEE J2EE server, which is running on a Ubuntu server. The “x4” inside

<sup>28</sup><https://github.com/structurizr/dsl/blob/master/docs/language-reference.md#deploymentNode>



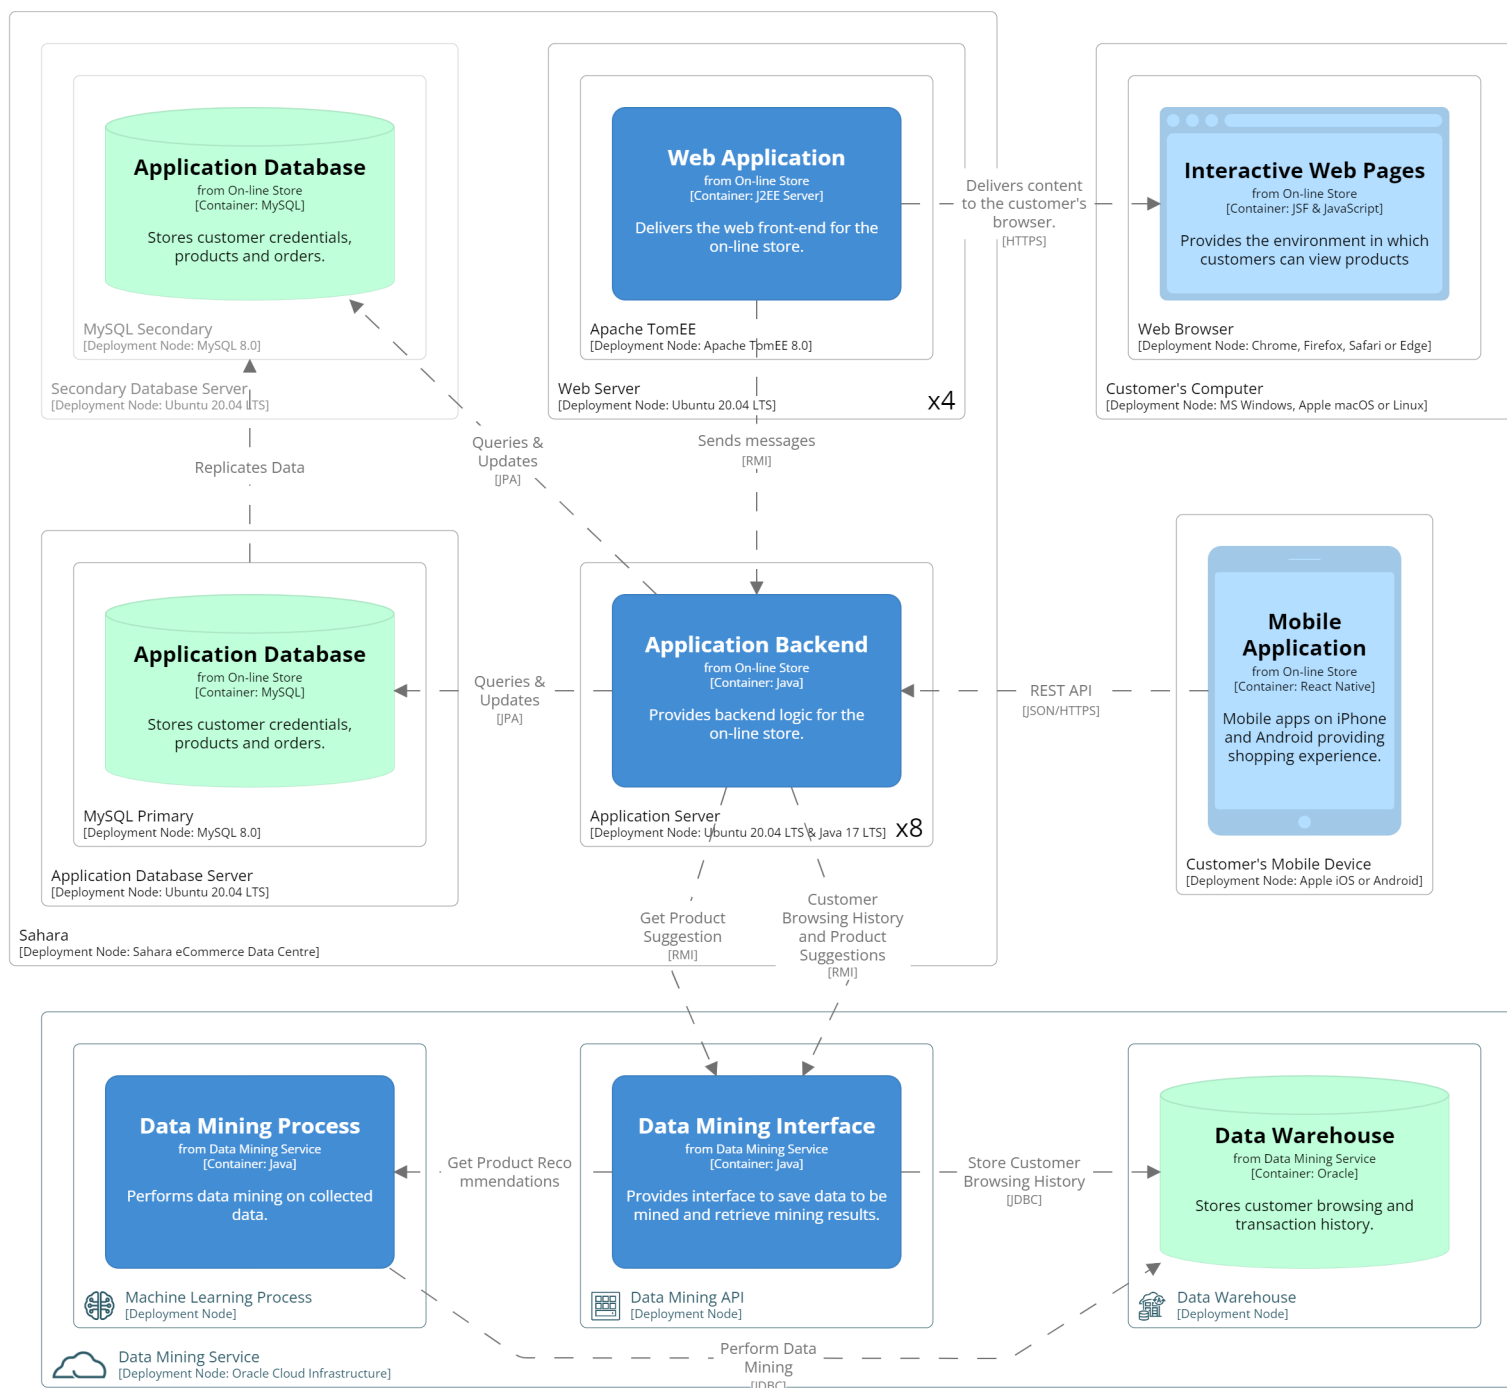


Figure 28: Deployment diagram for the Sahara eCommerce System.

the web server deployment node indicates that there will be four of these servers to share the load. The application backend runs on eight Ubuntu servers, providing the core business logic shared by the web and mobile applications.

The application database runs in MySQL on its own Ubuntu server. Replication of the application database is explicitly shown in this example, whereas it was not shown in figure 12. Replicating the database running on another server allows for failover. The application backend can continue to operate if the primary application database fails.

In this version of the example, the application backend communicates with the data mining service through an API published by the data mining interface running in a virtual machine on Oracle's cloud infrastructure. The data mining service uses Oracle's machine learning services to perform the data mining. Oracle's cloud-based data warehouse infrastructure is used to hold all the data.



Figure 29 is the key describing the icons and colours used in the deployment diagram.



Figure 29: Deployment diagram key.

## 6 Tools

We do not advocate a specific notation or support tools. Both UML and C4 have been used so that you are aware of some options. UML is a standardised notation, with formal syntax and semantics. There will be situations where the formality will be useful. C4 is popular because it has a basic structure, but the rules are intentionally loose to make it easy to adopt.

Regardless of whether you use UML, C4 or another notation, you should use tools to aid the creation of your diagrams and documentation. The important thing is that you want to use a modelling tool, not a drawing tool. Many drawing tools provide UML templates, and some also support C4. The issue with drawing tools is that they do not know what the elements of the diagram mean. If the name of an operation in a class is changed in a drawing tool, you will need to manually change it wherever it is referenced in other diagrams (e.g. in sequence diagrams). A modelling tool will track the information that describes the model, so that a change to a model element in one place, will be replicated wherever that element appears in other diagrams.

There are many tools that support UML. In a commercial project using UML on a large system, the cost of professional UML tools is negligible and is quickly recovered by the automation they provide. There are a number of free UML tools. Some to consider are [Astah](https://astah.net/products/free-student-license/)<sup>29</sup>, [ModelIO](https://www.modelio.org/)<sup>30</sup> or [PlantUML](https://plantuml.com/)<sup>31</sup>.

**Astah** Is a commercial product that supports modelling in many notations. They provide a free UML tool for students.

**ModelIO** Is an open source UML modelling tool.

<sup>29</sup><https://astah.net/products/free-student-license/>

<sup>30</sup><https://www.modelio.org/>

<sup>31</sup><https://plantuml.com/>

**PlantUML** Is an open source text-based descriptive language that generates UML diagrams. [PlantText](https://www.planttext.com/)<sup>32</sup> is an online tool supporting it.

There are fewer tools that support C4. [Structurizr](https://www.structurizr.com/)<sup>33</sup> was developed by Simon Brown as a tool to support generating C4 diagrams from textual descriptions. It is an [open source tool](https://github.com/structurizr/structurizr)<sup>34</sup>. You can use a domain specific language to describe a C4 model, or you can embed the details in Java or .Net code. There is also [C4-PlantUML](https://github.com/plantuml-stdlib/C4-PlantUML)<sup>35</sup>, which extends PlantUML to support C4. Astah Professional supports C4, but they no longer provide that version of the tool free to students.

## 7 Conclusion

Architectural views help developers understand different dimensions and details of a complex software architecture. They are useful both during design and as documentation. During design, views help you to focus on a particular aspect of the software architecture and ensure that it will allow the system to deliver all of its requirements. As documentation, views help developers to understand how different aspects of the architecture are intended to behave.

We have intentionally looked at a few different approaches to helping you describe a software architecture. You should be conversant with multiple different approaches. The hallmark of a professional is to know when to select a particular approach.

If you compare the “4+1 View Model” [19] with the views described in *Software Architecture in Practice* (SAP) [22], you will see that there are obvious similarities but also some differences. The logical, development and process views from the 4+1 view model map closely to the module and component-and-connector (C&C) views from SAP. The physical view corresponds to the allocation view. The 4+1 view model also includes the scenario view, which does not correspond directly to the SAP views.

The C4 model does not explicitly include the concept of views. Like SAP, it emphasises the structure of the software architecture.

The scenario view is used to demonstrate how the architecture described in the other views delivers the core functional requirements. It is used while designing a software architecture to validate that it is suitable for the system.

Kruchten intentionally separated the process view from the logical and development views, rather than bundling them together like the C&C view in SAP. This is because for some systems the dynamic details, which are described by the process view, can be complex and important. Dealing with issues such as complex concurrency, real-time interactions or latency, can often be more easily considered by having a separate view for them.

Kruchten’s experience with Canada’s integrated, nation-wide, air traffic control system was such a case. Data from radar systems and aircraft transponders have to be processed and reported to air traffic controllers in near real-time. With thousands of input sources and hundreds of controller stations, understanding concurrency issues is critical. Tracking aircraft from one control space to another means that communication latency is important. Each control space has its own hardware and is separated from neighbouring spaces by hundreds or thousands of kilometres.

As a software architect you need to choose which views provide meaningful information about your software system. The graphical notation used to describe a view is only one part of the view (though an important part). Ensure you provide enough supporting information so others will know how to work with your architecture and why you made the choices that you did.

---

<sup>32</sup><https://www.planttext.com/>

<sup>33</sup><https://www.structurizr.com/>

<sup>34</sup>[https://github.com/structurizr/](https://github.com/structurizr/structurizr/)

<sup>35</sup><https://github.com/plantuml-stdlib/C4-PlantUML>

---

# Architectural Decision Records

Software Architecture

February 28, 2022

Richard Thomas

---

## 1 Introduction

Documenting reasons why a decision was made about some aspect of the software architecture is important for the long-term maintainability of the system. Architecture decision records (ADR) are a simple but informative approach to documenting these reasons.

Michael Nygard was one of the early proponents of ADRs. His argument is that no one reads large documents but not knowing the rationale behind architecturally important decisions can lead to disastrous consequences, when later decisions are made that defeat the earlier decisions [24]. Nygard created ADRs as a light-weight approach to documenting important architecture decisions, to suit agile development processes. The ideas were based on Philippe Kruchten's discussion of the importance of architecture decisions in his article "The Decision View's Role in Software Architecture Practice" [25]. In this article Kruchten discusses extending his "4+1 View Model of Software Architecture" [19] to capture the rationale for important decisions while designing each view of the architecture.

Architecture decision records should capture important decisions that are made about the design of the architecture. These include decisions that influence the

- structure of the architecture,
- delivery of quality attributes,
- dependencies between key parts of the architecture,
- interfaces between key parts of the architecture or external interfaces, and
- implementation techniques or platforms.

These decisions provide important information for developers who have to work with the architecture, so that they know why decisions have been made and know how to design their code to fit into the architecture. They also provide important information for those who have to maintain the software in the future. ADRs help maintainers to know why decisions were made, so that they do not inadvertently make decisions that result in breaking expectations about the software.

ADRs are short notes about a single decision. The intent is to make it easy to record the information about the decision, so that it is more likely to be documented. ADRs are usually kept with the key project documentation. The argument is often made that this should be within the version control system (e.g. git) holding the project's source code. For example, a directory `doc/architecture/adr` in the project repository to contain the ADRs. The C4 model recommends you create a directory in the project repository to hold the C4 diagrams with a subdirectory for documentation, and another subdirectory for ADRs (e.g. `c4-model`, `c4-model/docs` and `c4-model/adrs`). Note that the C4 modelling tools do not like having the subdirectory containing the ADRs within the documentation subdirectory.

Each ADR is written in a separate file, using a simple notation like markdown. The file names are numbered so the history of decisions can be viewed. It is recommended that the file name describe the decision, to make it easier to scan for information about specific types of architectural decisions. Examples of meaningful file names include:

- `0001-independent-business-logic.md`
- `0002-implement-JSF-webapp.md`
- `0003-choose-database.md`

The directory containing these ADR files is the history of all architectural decisions made for the project.

## 2 Template

There are a few templates available to help provide consistent formatting of an ADR. The recommended template format contains the following sections.

**Title** Short phrase that describes the key decision.

**Date** When the decision was made.

**Status** Current status of the decision (i.e. proposed, accepted, deprecated, superseded or rejected).

**Summary** Summarise the decision and its rationale.

**Context** Describe the facts that influence the decision. State these in value-neutral language.

**Decision** Explain how the decision will solve the problem, in light of the facts presented in the context.

**Consequences** Describe the impact of the decision. What becomes easier and harder to do? There will be positive, neutral and negative consequences, identify all of them.

## 3 ADR Example

The following is an example ADR from the Sahara eCommerce application from section 4 of the *Architectural Views* notes.

### 1. Independent Business Logic

**Date:** 2022-01-06

**Status:** Accepted

#### Summary

*In the context of* delivering an application with multiple platform interfaces, *facing* budget constraints on development costs, *we decided* to implement all business logic in an independent tier of the software architecture, *to achieve* consistent logical behaviour across platforms, *accepting* potential complexity of interfaces to different platforms.

#### Context

- The system is to have both mobile and web application frontends.
- Marketing department wants a similar user experience across platforms.
- Delivering functional requirements requires complex processing and database transactions.
  - Product recommendations based on both a customer's history and on purchasing behaviour of similar customers.
  - Recording all customer interactions in the application.
- Sales department wants customers to be able to change between using mobile and web applications without interrupting their sales experience.
- Development team has experience using Java.

#### Decision

All business logic will be implemented in its own tier of the software architecture. Web and mobile applications will implement the interaction tier. They will communicate with the backend to perform all logic processing. This provides clear separation of concerns and ensures consistency of business logic across frontend applications. It means the business logic only needs to be implemented once. This follows good design practices and common user interface design patterns.

The business logic will be implemented in Java. This suits the current development team's experience and is a common environment. Java has good performance characteristics. Java has good support for interacting with databases, to deliver the data storage and transaction processing requirements.

## Consequences

### Advantages

- Separation of concerns, keeping application logic and interface logic separate.
- Ensures consistency, if business logic is only implemented in one place.
- Business logic can execute in a computing environment optimised for processing and transactions.
  - Also makes load balancing easier to implement.

### Neutral

- Multiple interfaces are required for different frontend applications. These can be delivered through different Java libraries.

### Disadvantages

- Additional complexity for the overall architecture of the system.

## 4 Quality

A well written ADR explains the reasons for making the decision, while discussing pros and cons of the decision. In some cases it is helpful to explain reasons for not selecting other seemingly good options. The ADR should be specific about a single decision, not a group of decisions.

The context should provide all the relevant facts that influence the decision. The decisions section should explain how business priorities or the organisation's strategic goals influenced the decision. Where the team's membership or skills has influenced the decision, these should be acknowledged. All consequences should be described. These may include decisions that need to be resolved later or links to other ADRs that record decisions that were made as a result of this decision.

The summary follows the format of a Y-statement [26]. It includes key information about the decision for quick consumption, leaving the details for the rest of the ADR. The template for a Y-statement is:

**In the context of** *functional requirement or architecture characteristic*,  
**facing** *non-functional requirement or quality attribute*,  
**we decided** *selected option*,  
**to achieve** *benefits*,  
**accepting** *drawbacks*.

The Y-statement can be expanded to include **neglected** *alternative options* after the **we decided** clause. A **because** clause providing *additional rationale* can be added to the end of the statement. Some teams use this expanded form of the Y-statement as the complete ADR for simple decisions.

ADRs should be reviewed after about one month. Consider how the consequences have played out in reality. Revise bad decisions before too much has been built based on the decision. The ADR may need to be updated to include any consequences that have been uncovered in practice.

ADRs should be immutable. Do not change existing information in an ADR. An ADR can have new information added to it, like adding new consequences. If the decision needs to be changed, create a new ADR. The original ADR should have its status changed to *deprecated*, and then *superseded* once the new decision is accepted and put into practice. Add a link in the original ADR to the new ADR, and the new ADR should link back to the original.

Sometimes an ADR is not superseded by a new ADR, instead it is extended or amended by another ADR. In these cases, the original ADR still has an *accepted* status but a link is added indicating the other ADR that amends or extends the original ADR. The new ADR then includes a link back to the original ADR, indicating that the new ADR extends or amends the original.

## 5 What to Put in an ADR?

Only document important decisions that affect the architecture's structure, non-functional characteristics, dependencies, interfaces, or construction techniques. Michael Nygard calls these “architecturally significant” decisions [24]. The types of decisions that usually should be documented are:

- Critical or important to delivering system functionality.
- Helps deliver important quality attributes.
- Unconventional or risky approach to a solution.
- Has expensive consequences.
- Has long lasting effects or will affect a large part of the design.
- Will affect a large number of stakeholders or an important stakeholder.
- Took a long time or significant effort to decide.
- Unexpected decisions that were required late in the project. These may also be important learning experiences.

## 6 Conclusion

Decisions that affect the software architecture need to be recorded for reference in the future. In a large project it is not possible for everyone to be aware of every decision that is made. ADRs provide a mechanism for team members to find reasons for decisions to help them understand how to work within its constraints. ADRs give new team members a starting point to learn about the architecture and understand how it evolved into its current state. They also provide a reminder for yourself when you are wondering why you did something a particular way, or when you need to explain your decision to someone else, months after you made the decision.

The takeaway is, write an ADR whenever you make an important decision. You, or a colleague, will need to refer to it at some point in the future. Eli Perkins has a good summary of why you should write ADRs at the [GitHub Blog](https://github.blog/2020-08-13-why-write-adrs/)<sup>36</sup> [27].

---

<sup>36</sup><https://github.blog/2020-08-13-why-write-adrs/>

# Pipeline Architecture

Software Architecture

February 28, 2022

Brae Webb

## 1 Introduction

The pipeline architecture needs very minimal introduction. Almost every developer will have been exposed to software which implements this architecture. Some notable examples are bash, hadoop, and most functional programming languages. A pipeline architecture consists of modular components which accept input and return output. Data is piped through a sequence of components until the desired output is reached.



Figure 30: An example of using bash's pipeline architecture to perform statistical analysis.

## 2 Terminology

As illustrated by Figure 31, a pipeline architecture consists of just two components;

**Filters** modular software components, and

**Pipes** the flow of data between filters.



Figure 31: A generic pipeline architecture.

Filters themselves are composed of four major types:

**Producers** Filters where data originates from are called producers, or source filters.

**Transformers** Filters which manipulate input data and output to the outgoing pipe are called transformers.

**Testers** Filters which apply selection to input data, allowing only a subset of input data to progress to the outgoing pipe are called testers.

**Consumers** The final state of a pipeline architecture is a consumer filter, where data is eventually used.

The example in Figure 30 shows how bash's pipeline architecture can be used to manipulate data in unix files. Figure 32 helps to clarify the above terminology by labelling each of the bash processes in the example.

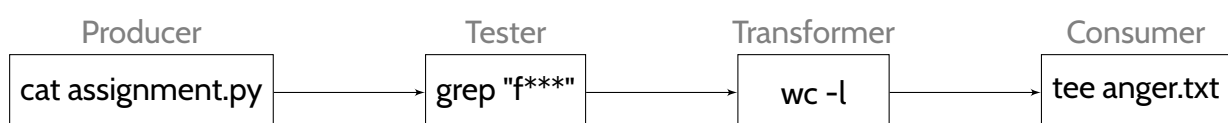


Figure 32: Figure 30 with labelled filter types.

### 3 Case Study: MapReduce

One of the more prevalent uses of the pipeline architecture is the MapReduce pattern. The MapReduce pattern was discovered in 2004 as a solution to the challenges which Google faced managing their search index [28].<sup>37</sup> MapReduce affords impressive parallelism inherent to the programming pattern.

The two key ideas of MapReduce, *map* and *reduce*, come from functional programming.<sup>38</sup> Below are the generic types of the *map* and *reduce* functions in functional programming.

```
1 map : ( $\tau_1 \rightarrow \tau_2$ )  $\rightarrow \tau_1Seq \rightarrow \tau_2Seq$ 
2 map f xs
3 reduce : ( $\tau_1 \rightarrow \tau_1 \rightarrow \tau_1$ )  $\rightarrow \tau_1Seq \rightarrow \tau_1 \rightarrow \tau_1Seq$ 
4 reduce f xs initial
```

If you're unfamiliar with this notation, the rough English translation is:

**map** The parameters of the *map* function are:

- (a) A function, *f*, which takes a parameter of type  $\tau_1$  and returns a type  $\tau_2$ .
- (b) A sequence of elements of type  $\tau_1$ .

The return type of the *map* function is a sequence of elements of type  $\tau_2$ .

**reduce** The parameters of the *reduce* function are:

- (a) A function, *f*, which takes two parameters both of type  $\tau_1$  and returns a type  $\tau_1$ .
- (b) A sequence of elements of type  $\tau_1$ .
- (c) An initial accumulator value of type  $\tau_1$ .

The return type of the *reduce* function is a sequence of elements of type  $\tau_1$ .

The code snippet below uses the *map* and *reduce* functions to perform the operations of the above bash example. One important thing to note about the example below is the map operation on line 11. Each application of the lambda function within the map operation is completely independent and could, in theory, be executed simultaneously.

```
1 contents = read("assignment.py")
2
3 # filter relevant lines by rebuilding the list
4 contents = reduce( $\lambda$  xs x  $\rightarrow$ 
5                 if x.contains("f***")
6                 then x + xs
7                 else xs,
8                 contents)
9
10 # use map to count occurrences of word
11 contents = map( $\lambda$  line  $\rightarrow$  line.count("f***"), contents)
12
13 # use reduce to sum list of counts
```

<sup>37</sup>Although the pattern was in use prior to their work[29]

<sup>38</sup>I think? Will consult with history textbook (Ian)



```

14 contents = reduce( $\lambda$  total curr  $\rightarrow$  total + curr, contents, 0)
16 write("anger.txt", contents)

```

So by design, code written in this pattern can process data simultaneously. Tools such as [Hadoop](#)<sup>39</sup> are able to take advantage of this to distribute computation automatically.

Using the terminology of a pipeline architecture, what filters do the *map* and *reduce* operators correspond to?

How would you improve the efficiency of the code snippet above?

## 4 Case Study: Compilers

An interesting case study of the pipeline architecture is a compiler.<sup>40</sup> As a foundational technology, compilers have undergone rigorous refinement and are perhaps the most well studied type of software. Modern compilers have well-defined modular phases as illustrated by Figure 33, each phase of a compiler transforms the representation of the program until the target program is produced.

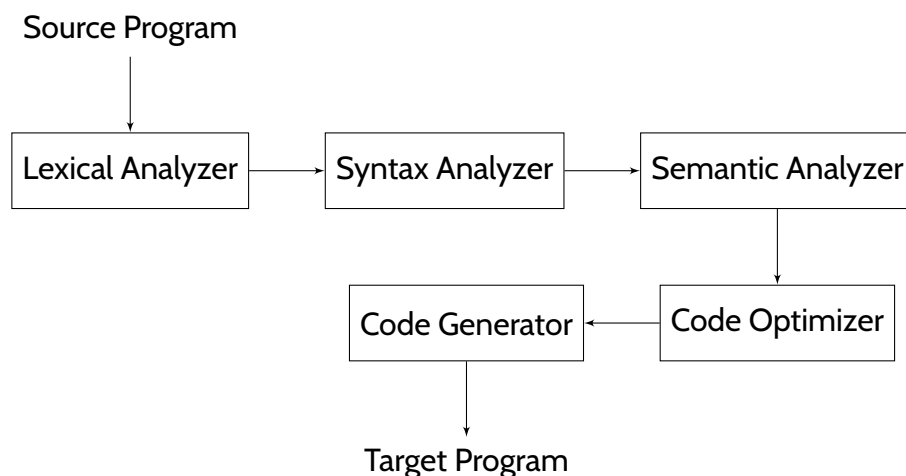


Figure 33: Typical phases of a compiler.

However, a compiler is not well suited to use a pipeline architecture. In general, the modules of a pipeline architecture should be independent of their input source. This is not the case in compilers, as each phase relies on the completion of the previous phase. As a result, the input dependencies of a compiler make it too restrictive for a true pipeline architecture.

Instead, compilers are often built as a hybrid of a pipeline architecture and the *Blackboard Architecture*. The blackboard architecture consists of;

- a knowledge base, the ‘blackboard’,

<sup>39</sup><https://hadoop.apache.org/>

<sup>40</sup>You don’t need to understand the phases of a compiler — two data structures, the Symbol Table and AST, are transformed in each compiler phase.

- knowledge sources which use and update the knowledge base, and
- a control component to coordinate the operation of knowledge sources.

In modern compilers, the data which would be passed through pipes, the Symbol Table and AST, are used and updated by each phase. They are subsequently used as the 'blackboard'. Each phase is considered a knowledge source which uses the knowledge base to transform and update the knowledge base. Finally, in this hybrid, the control component is not required as the sequence of phase execution in a pipeline coordinates operation. Figure 34 illustrates this proposed architecture. Of course, there are many compilers out there, many of them deviate from this architectural hybrid.

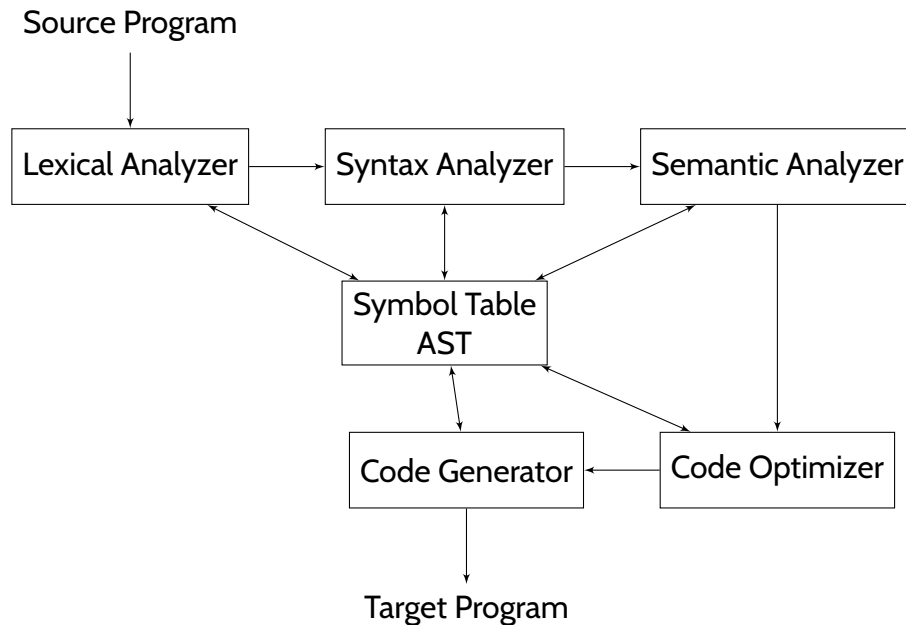


Figure 34: Modern phases of a compiler.

# Containers

Software Architecture

March 14, 2022

Brae Webb

**TODO: Motivate better & work to docker from containers**

I don't care if it works on your machine! We are not shipping your machine!

— Vidiu Platon

## 1 Introduction

As developers, we often find ourselves relying on some magical tools and technologies. Version control, operating systems, databases, and containers, to name a few. If you are not yet acquainted with containers, and more specifically, docker, you soon will be. Over the past decade docker has enabled some truly fanciful architectures and developer workflows. Docker is the proposed solution to the age-old programmer proverb, "it works on my machine!". However, before we get swept up by a snake-oil salespitch, let's see how docker actually works to learn what it is, and what it is not.

## 2 History and Fundamentals

Relative to other tools in the magical suite, docker is new on the scene. Docker was first made available publicly in 2013 at PyCon.<sup>41</sup> Pitched to deliver the isolation benefits of Virtual Machines (VMs) while maintaining efficient execution. Virtual machines themselves are a much older invention, dating back to the 1960s, around the time that UQ was having it's first computer installed.<sup>42</sup> The concept of a virtual machine, unlike its implementation, is straight-forward — use software to simulate hardware. From there, one can install an operating system on the simulated hardware and start using a completely isolated, completely new computer without any additional hardware. Of course, this process puts great strain on the real hardware and as such, VMs are deployed sparingly.

Unlike virtual machines, containers do not run on virtual hardware, instead, containers run on the operating system of the host machine. The obvious advantage of this is containers run much more efficiently than virtual machines. Containers however, manage to remain isolated and it is at this point that we should explain how docker actually works. Docker is built upon two individually fascinating technologies; namespaces, and layered filesystems.

### 2.1 Namespaces

The first technology, namespaces, is built into the linux kernel. Linux namespaces were first introduced into the kernel in 2002, inspired by the concept introduced by the Plan 9 operating system from Bell Labs in the 1980s. Namespaces enable the partitioning and thus, isolation, of various concepts managed and maintained by an operating system. Initially namespaces were implemented to allow isolated filesystems (the so-called 'mount' namespace). Eventually, as namespaces were expanded to include process

<sup>41</sup><https://www.youtube.com/watch?v=wW9CAH9nSLs>

<sup>42</sup><https://www.youtube.com/watch?v=DB1Y4GrfrZk>

App 1	App 2
File System	File System
Guest OS	Guest OS
Hypervisor	
Operating System	
Hardware	

(a) Two virtual machines running on a host

App 1	App 2	Docker Daemon
File System	File System	
Operating System		
Hardware		

(b) Two containers running on a host

Figure 35: Comparison of virtual machines and containers

isolation, network isolation, and user isolation, the ability to mimic an entirely new isolated machine was realised; containers were born.<sup>43</sup>

Namespaces provide a mechanism to create an isolated environment within your current OS. The creation of such an isolated environment with namespaces has been made quite easy — you can create an isolated namespace with just a series of bash commands. Niklas Dzösch's talk 'docker without docker', uses just 84 lines of Go code (which docker itself is written in), to create, well, docker without docker.<sup>44</sup> But namespaces are just the first technology which enables docker. How do you pre-populate these isolated environments with everything you need to run a program? To see what's in the isolated environment, we would run `ls` which, oh, requires the `ls` binary. Furthermore, to even consider running a command we need a shell to type it in, so, oh, we should also have a `bash` binary. And so on until, oh, finally, we have a linux kernel at least!<sup>45</sup>

## 2.2 Layered Filesystem

A core principle of unix operating systems is that everything is a file. Naturally then, if we want to start using a isolated environment, all we need to do is copy in all the files which together form an operating system, right? Well, yes, kind of. In principle this is all you need do but this would hardly enable the popularity docker enjoys today.

Say that you want to send your coworker a docker container which has nginx (a tool for routing web traffic) setup in just the way you need to pass incoming traffic to various components of your application. Let's assume that you've setup nginx in ubuntu. All you would need to do is zip up all the files which compose the ubuntu OS (an impressively small 188MB) then all the files installed by nginx (about 55MB) and finally all the configuration files which you have modified, somewhere in the order of 1000 bytes or 1 KB. In total you're sending your coworker about 243MBs worth of data, less than a gigabyte, so they aren't too upset.

Now once we've finished developing our application and we're ready to package it up and send it to the world. Rather than trying to support every known OS, we bundle all our services in docker containers, one for nginx, one for mysql, one for our web application, etc, etc. If your applications containers are as popular as nginx, this means one *billion* downloads of your container. At a size of 243MBs, you've contributed 243

<sup>43</sup>Of course, containers in a rudimentary form existed before introduction to the linux kernel but we have to start somewhere.  
<https://blog.aquasec.com/a-brief-history-of-containers-from-1970s-chroot-to-docker-2016>

<sup>44</sup>[https://www.youtube.com/watch?v=7H\\_\\_eF6hvWg](https://www.youtube.com/watch?v=7H__eF6hvWg)

<sup>45</sup>You might be asking yourself, wait but I have a Windows operating system and I can still run docker, what gives? The answer, ironically enough, a virtual machine!

petabytes to the worlds collective bandwidth usage, and that's just your nginx container.

Dockers success over other containerization applications comes from the way it avoids this looming data disaster. A concept known as the layered, or overlayed, or the stacked filesystem solves the problem. First proposed in the early 1990s, layered filesystems enable layers of immutable files to be stacked below a top-level writable system. This has the effect of producing a seemingly mutable (or writable) filesystem while never actually modifying the collection of immutable files. Whenever a immutable file is 'written to', a copy of the file is made and all modifications are written to this file. When reading or listing files, the filesystem overlays the layers of immutable files together with the layer of mutable files. This gives the appearance of one homogeneous filesystem.

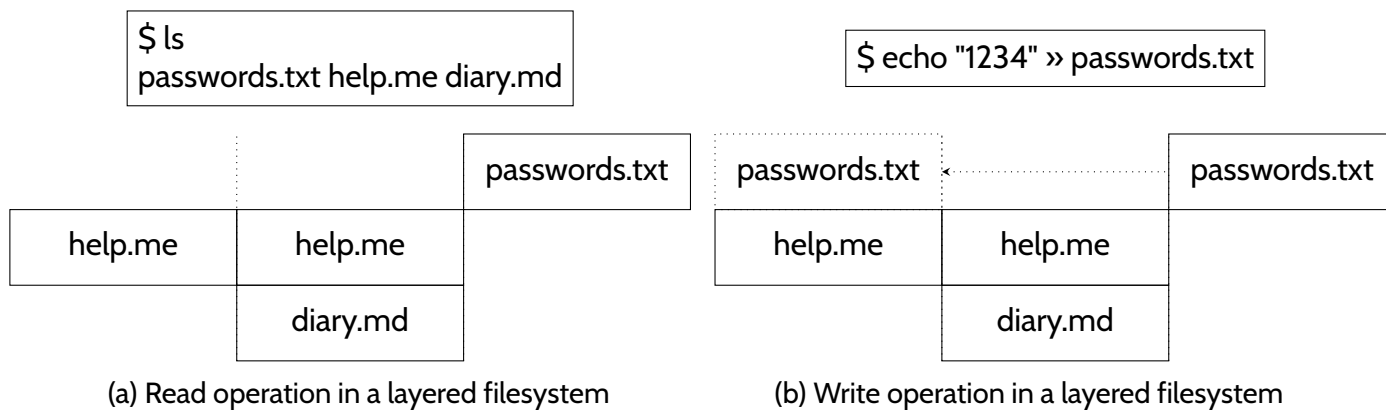


Figure 36: Read and write operations in a layered filesystem. The leftmost column in each diagram represents the most recent 'writable' layer.

Docker uses this technique to reduce the amount of duplicated files. If you have docker containers which run nginx, mysql, and python but all containers run on ubuntu, then your computer will only need to store one copy of the ubuntu filesystem. Each container will store the changes to the base OS required to install each application and project that layer over the immutable ubuntu filesystem.

## 2.3 Summary

While docker itself only came out in 2013, the two primary technologies which it is composed of; namespaces, and the layered filesystem; were around since the early 1990s. Docker combines these technologies to enable applications to run in an isolated environment which can be efficiently replicated across different host computers. The reproducibility of docker containers and the fact that they are so light weight makes them an ideal target for two important aspects of modern development; developers simulating production environments locally, and duplicating production machines to scale for large loads of traffic.

## 3 Docker FROM scratch

Now that we understand the fundamentals of how docker works, let's start building our very first docker container. To follow along, you will need to have docker installed on your computer<sup>46</sup> and have access to basic unix command line applications.<sup>47</sup>

To start with, we'll write a `Dockerfile` which builds a docker image without an operating system and just prints 'Hello World' [30]. The docker 'code' is written in a `Dockerfile` which is then 'compiled' into a docker image and finally run as a docker container. The first command in your `Dockerfile` should always be `FROM`. This command tells docker what immutable filesystem we want to start from, often, this will be

<sup>46</sup><https://docs.docker.com/get-docker/>

<sup>47</sup>For windows users, I would recommend Windows Subsystem for Linux

your chosen operating environment. In this exercise, since we don't want an operating system, we start with `FROM scratch`, a no-op instruction that tells docker to start with an empty filesystem.

Let's get something in this container. For this, we'll use the `COPY` command which copies files from the host machine (your computer) into the container. For now, we'll write `COPY hello-world /`, which says to copy a file from the current directory named `hello-world` into the root directory (`/`) of the container. We don't yet have a `hello-world` file but we can worry about that later. Finally, we use the `CMD` command to tell the container what to do when it is run. This should be the command which starts your application.

```
FROM scratch
COPY hello-world /
CMD ["/hello-world"]
```

Next, we'll need a minimal hello world program. Unfortunately, we'll have to use C here as better programming languages have a bit too much overhead. For everyone who has done CSSE2310, this should be painfully familiar, create a `main` function, print hello world, with a new line, and return 0.

```
#include <stdio.h>

int main() {
    printf ("Hello World\n");
    return 0;
}
```

Let's try running this container. Try to guess if this is going to work, why? why not?  
First, the hello world program needs to be compiled into a binary file.

```
>> gcc -o hello-world hello-world.c
>> ls
Dockerfile      hello-world     hello-world.c
```

Next we'll use the `Dockerfile` to build a docker image and run that image. Images are stored centrally for a user account so to identify the image, we need to tag it when it is built, we'll use 'hello'.

```
>> docker build --tag hello .
>> docker run hello
standard_init_linux.go:228: exec user process caused: no such
file or directory
```

Unless this is dockers unique way of saying hello world, something has gone terribly wrong. Here we're illustrating the power of docker isolation as well as the difficulty of not having an operating system. This very simple hello world program still relies on other libraries in the OS, libraries which aren't available in the empty docker container. `ldd` tells us exactly what `hello-world` depends on. The hello world program can be statically compiled so that it doesn't depend on any libraries [31].

```
>> ldd hello-world
linux-vdso.so.1 (0x00007ffc51db1000)
libc.so.6 => /lib/x86_64-linux-gnu/libc.so.6 (0
x00007fcff8553000)
/lib64/ld-linux-x86-64.so.2 (0x00007fcff8759000)
>> gcc -o hello-world hello-world.c -static
>> ldd hello-world
not a dynamic executable
>> docker build --tag hello .
>> docker run hello
Hello World
```

Now we have a docker image built from scratch, without an operating system, which can say 'Hello World'!

If you're interested in exploring in more depth, try using the 'docker image inspect hello' and 'docker history hello' commands.

TODO: A standard use case of docker

TODO: A complicated use case of docker

TODO:

## 4 Best Practices

Order is important: least to most frequently changing content.

If using COPY, be specific.

Identify cachable units (useful?).

Don't install things which you don't need. Don't include debugging tools. Cleanup after installation.

Use existing images.

Don't use latest.

## 1 Introduction

Configuration management can be one of the more challenging aspects of software development. In sophisticated architectures there are roughly two layers of configuration management; machine configuration and stack configuration.

**Machine configuration** encompasses software dependencies, operating system configuration, environment variables, and every other aspect of a machines environment.

**Stack configuration** encompasses the configuration of an architectures infrastructure resources. Infrastructure includes compute, storage, and networking resources.

Infrastructure includes compute, storage, and networking resources. In a sense, machine configuration is a subset of the stack configuration, however, stack configuration is a higher level of abstraction. In this course, when we refer to infrastructure as code, we are primarily discussing the stack configuration. Section ?? discusses how infrastructure as code can also be used to manage machine configuration.

## 2 Brief History

Infrastructure as Code (IaC) began to take hold in the software community thanks to the uptake of virtualization. In the 'Iron Age' of computing, installing a new server was rate limited by how quickly you could shop for and order a new physical machine. Once the machine arrived at your company, some number of weeks after the purchase, someone was tasked with setting it up, configuring it to talk to other machines, installing the software it needed. Compared to the weeks it takes to aquire the machine, a day of configuration is not so bad. With virtualization one physical machine can be the home of numerous virtual machines. Each one of these machines requires configuration. Now, with new machines available within minutes a day of configuring is out of the question.

Infrastructure as code can be simple. A shell script which installs dependencies is infrastructure as code. Such a shell script would be an imperative implementation of infrastructure as code. In a pinch, this works fine but it is more common to use a declarative variant. Declarative IaC is a specification of our ideal world. We specify our idealized world and our IaC tool shapes the real world to match.

## 3 Stack Configuration



## References

[1] M. Fowler, “Software architecture guide.” <https://martinfowler.com/architecture/>, August 2019.

[2] R. C. Martin, “Design principles and design patterns.” [https://web.archive.org/web/20150906155800/http://www.objectmentor.com/resources/articles/Principles\\_and\\_Patterns.pdf](https://web.archive.org/web/20150906155800/http://www.objectmentor.com/resources/articles/Principles_and_Patterns.pdf), 2000. Accessed: 2022-01-10.

Blog post from Uncle Bob’s Object Mentor site describing the SOLID design principles.

[3] G. M. Weinberg, *The Psychology of Computer Programming*. USA: John Wiley & Sons, Inc., 1985.

[4] M. Richards and N. Ford, *Fundamentals of Software Architecture: An Engineering Approach*. O’Reilly Media, Inc., January 2020.

This is a recent book (2020) which begins in part one by introducing the responsibilities of a software architecture, followed by some guiding principles for architectures. In part two, the book enumerates many of the architectures introduced in this course with good descriptions for later reference. Finally the book returns to the soft skills required for a career in software architecting.

[5] M. Galster and S. Angelov, “What makes teaching software architecture difficult?,” in *Proceedings of the 38th International Conference on Software Engineering Companion*, ICSE ’16, pp. 356–359, Association for Computing Machinery, 2016.

An article which attempts to enumerate the reasons why teaching software architecture is hard. They coin the term ‘wicked architecture’ to explain the imprecise nature of software architecture that students struggle with.

[6] S. Manjarres, “2021 world password day: How many will be stolen this year?” <https://www.secplicity.org/2021/05/04/2021-world-password-day-how-many-will-be-stolen-this-year/>, May 2021.

A number of hopefully alarming facts about password theft and cracking in 2021.

[7] J. H. Saltzer and M. D. Schroeder, “The protection of information in computer systems,” *Proceedings of the IEEE*, vol. 63, pp. 1278–1308, September 1975.

Early text which is the first (to my knowledge) to enumerate security design principles.

[8] M. Gasser, *Building a Secure Computer System*, pp. 35–44. Van Nostrand Reinhold Company, January 1988.

Another early text which enumerates a collection of security design principles.

[9] J. Viega and G. R. McGraw, *Building Secure Software: How to Avoid Security Problems the Right Way*, pp. 91–113. Addison-Wesley Professional, September 2001.

A more recent text that also enumerates a number of security design principles.

[10] J. H. Saltzer, “Protection and the control of information sharing in multics,” *Communications of the ACM*, vol. 17, pp. 388–402, July 1974.

The article where Saltzer coined the principle of least privilege, one of the foundations of security design principles.

- [11] M. Howard and D. LeBlanc, *Security Principles To Live By*, p. 64. Microsoft Press Redmond, Wash., December 2002.

Source contains an excellent quote on the principle of failing securely “Death, taxes, and computer system failure are all inevitable to some degree. Plan for the event.”

- [12] M. Gegick and S. Barnum, “Failing securely.” <https://www.cisa.gov/uscert/bsi/articles/knowledge/principles/failing-securely>, December 2005.

A page with a collation of relevant expert opinions on failing securely.

- [13] S. Janardhan, “More details about the October 4 outage.” <https://engineering.fb.com/2021/10/05/networking-traffic/outage-details/>, October 2021.

A Facebook engineering blog post which explains the cause of an outage and the subsequent challenges caused by failing securely

- [14] C. E. Shannon, “Communication theory of secrecy systems,” *The Bell System Technical Journal*, vol. 28, no. 4, pp. 656–715, 1949.

The article where Shannon’s maxim “One ought to design systems under the assumption that the enemy will immediately gain full familiarity with them” is coined. Shannon’s maxim is a particular wording of Kerckhoff’s principle.

- [15] B. Foote and J. Yoder, “Big ball of mud,” *Pattern languages of program design*, vol. 4, pp. 654–692, 1997.

The source for the term ‘big ball of mud’ used to describe an architecture without intentional style.

- [16] L. Bass, P. Clements, and R. Kazman, *Software Architecture in Practice*. Addison-Wesley Professional, 3 ed., September 2012.

This book is a staple of the field. Most courses on software architecture follow this book as a reference. The book is quite terse and academic which will require a strong will to complete. Rather than focusing on specific architecture patterns as in Richards & Ford, this book provides tactics to achieve each quality attribute which can be used to design new architectures

- [17] R. Lister, C. Fidge, and D. Teague, “Further evidence of a relationship between explaining, tracing and writing skills in introductory programming,” in *Proceedings of the 14th Annual ACM SIGCSE Conference on Innovation and Technology in Computer Science Education*, ITiCSE ’09, (New York, NY, USA), p. 161–165, Association for Computing Machinery, 2009.

- [18] R. Lister, “Concrete and other neo-piagetian forms of reasoning in the novice programmer,” in *Proceedings of the Thirteenth Australasian Computing Education Conference - Volume 114*, ACE ’11, (AUS), p. 9–18, Australian Computer Society, Inc., 2011.

- [19] P. Kruchten, “Architectural blueprints — the ‘4+1’ view model of software architecture,” *IEEE software*, vol. 12, no. 6, pp. 42–50, 1995. <https://www.cs.ubc.ca/~gregor/teaching/papers/4+1view-architecture.pdf>.

- [20] T. Hilburn, A. Squires, H. Davidz, and R. Turner, “Federal aviation administration (faa) advanced automation system (aas).” [https://www.sebokwiki.org/wiki/Federal\\_Aviation\\_Administration\\_\(FAA\)\\_Advanced\\_Automation\\_System\\_\(AAS\)](https://www.sebokwiki.org/wiki/Federal_Aviation_Administration_(FAA)_Advanced_Automation_System_(AAS)), October 2021. Example from the *Guide to the Systems Engineering Body of Knowledge* [https://www.sebokwiki.org/w/index.php?title=Guide\\_to\\_the\\_Systems\\_Engineering\\_Body\\_of\\_Knowledge\\_\(SEBoK\)&oldid=63222](https://www.sebokwiki.org/w/index.php?title=Guide_to_the_Systems_Engineering_Body_of_Knowledge_(SEBoK)&oldid=63222).

A small article which investigates the creation of a small statically linked hello world program.

- [21] P. Kruchten, *The Rational Unified Process: An Introduction*. Addison-Wesley Professional, 2004.
- [22] L. Bass, P. Clements, and R. Kazman, *Software Architecture in Practice*. Addison-Wesley, 4 ed., August 2021.

This book is a staple of the field. Most courses on software architecture follow this book as a reference. The book is quite terse and academic which will require a strong will to complete. Rather than focusing on specific architecture patterns as in Richards & Ford, this book provides tactics to achieve each quality attribute which can be used to design new architectures

- [23] S. Brown, *Software Architecture for Developers - Volume 2*. Leanpub, January 2022. <https://leanpub.com/visualising-software-architecture>.

This book focusses on the visual communication and documentation of software architecture, based upon a collection of ideas and techniques that thousands of people across the world have found useful. The core of this is Simon's C4 software architecture model and the software guidebook. You'll also find discussion about notation, the various uses for diagrams, the value of creating a model and tooling, and documentation.

- [24] M. Nygard, "Documenting architecture decisions." <https://cognitect.com/blog/2011/11/15/documenting-architecture-decisions>, November 2011. Accessed: 2022-01-27.
- [25] P. Kruchten, R. Capilla, and J. C. Duenas, "The decision view's role in software architecture practice," *IEEE software*, vol. 26, no. 2, pp. 36–42, 2009.
- [26] O. Zimmermann, "Architectural decisions – the making of." <https://ozimmer.ch/practices/2020/04/27/ArchitectureDecisionMaking.html>, March 2021. Accessed: 2022-02-02.
- [27] E. Perkins, "Why write adrs." <https://github.blog/2020-08-13-why-write-adrs/>, August 2020. Accessed: 2022-02-02.
- [28] J. Dean and S. Ghemawat, "Mapreduce: Simplified data processing on large clusters," in *OSDI'04: Sixth Symposium on Operating System Design and Implementation*, (San Francisco, CA), pp. 137–150, 2004.
- [29] D. J. DeWitt and M. Stonebraker, "Mapreduce: A major step backwards." <https://dsf.berkeley.edu/cs286/papers/backwards-vertica2008.pdf>, January 2008.

An article which critiques the popularity of the MapReduce pattern.

- [30] C. Xu, "Docker: From scratch." <https://codeburst.io/docker-from-scratch-2a84552470c8>, July 2020.

An article detailing the process required for running a statically linked hello world program in the scratch docker environment.

- [31] henszey, "Smallest x86 ELF hello world." <http://timelessname.com/elfbin/>.

A small article which investigates the creation of a small statically linked hello world program.