

POWER DEVICES			
	Description	Quantity	Unit
●	DUPLEX- 4" POKE-THRU	3	Count
●	DUPLEX GFCI	4	Count
●	DUPLEX	140	Count
●	JBOX CEILING DECICATED	2	Count
●	QUAD DEDICATED	1	Count
■	QUAD/TEL/DATA- 6" POKE-THRU	4	Count
■	QUAD/TEL/DATA/AV- 8" POKE-THRU	10	Count
●	QUAD	29	Count
●	TEL/DATA/P	9	Count

MECHANICAL BRANCH			
	Description	Quantity	Unit
✓	1-1/4"C EMT 2#4 + 1#8 GND	268.8708	ft

LOW VOLTAGE			
	Description	Quantity	Unit
●	AV	16	Count
▲	DATA W/ 3/4"C EMT CONDUIT STUB	16	Count
／	LEGRAND CONNECTRAC EXPRESSKIT	14.1067	ft
▲	TEL/DATA W/ 3/4"C EMT CONDUIT STUB	7	Count

POWER BRANCH			
	Description	Quantity	Unit
／	3/4" EMT, 3#10	35.4085	ft
／	3/4" EMT, 3#12	255.1180	ft
／	3/4" EMT, 4#10	298.8733	ft
／	3/4" EMT, 4#12	557.1416	ft
／	3/4" EMT, 5#10	249.4451	ft
／	3/4" EMT, 5#12	506.2955	ft
／	3/4" EMT, 6#12	1,165.8040	ft
／	3/4" PVC 4#12	59.6710	ft

MECHANICAL DEVICES			
	Description	Quantity	Unit
■	70A, 1P SWITCH MOTOR	3	Count

FEEDERS			
	Description	Quantity	Unit
／	5L1B1 TO 5L1B1A= 1-1/4"C EMT 4#2 CU + 1#8 CU GND	9.1395	ft
／	5L1B2 TO BL1B2A= 1-1/4"C EMT 4#2 CU + 1#8 CU GND	8.6933	ft

BUILDING 1 – LEVEL 5 – POWER & COMMUNICATION PLAN – AREA B

SCALE
1/8"=1'-0"

SHEET NOTES

SCALE
NO SCALE

A1

SHIMODA
DESIGN GROUP

ARCHITECTURE

INTERIORS + PLANNING

EXTRA SU

837 TRACTION AVENUE, SUITE 101

LOS ANGELES, CALIFORNIA 90013

T: 213-596-1771 F: 213-596-1772

THE HONEST COMPANY

PLAYA VISTA OFFICE

12121 BLUFF CREEK DRIVE

PLAYA VISTA, CA 90094

CLIENT

THE HONEST COMPANY

12130 MILLENNIUM DRIVE, SUITE 500

LOS ANGELES, CA 90094

ARCHITECT

SHIMODA DESIGN GROUP

JOEY SHIMODA, FAIA

SUSAN CHANG, AIA

837 TRACTION AVENUE, SUITE 101

LOS ANGELES, CA 90013

T: 213.596.1771

MECHANICAL/ELECTRICAL/PLUMBING

ENGINEERS

ARC ENGINEERING

MUHAMMAD ABDULHAMID, P.E.

JACOB RODRIGUEZ, S.E.

3045 N. HOLLYWOOD WAY

BURBANK, CA 91505

T: 818.508.6300 X 201

STRUCTURAL ENGINEER

LABIB FUNK + ASSOCIATES

JACOB RODRIGUEZ, S.E.

505 N. BRAND BLVD, SUITE 800

GLENDALE, CA 91203

T: 626.351.3167

CODE CONSULTANT

SIMPSON GUMPERTZ & HEGER

NATE B. WITASEK, P.E., CFI, LEED AP, CASP

757 S. ALAMEDA STREET, SUITE 440

LOS ANGELES, CA 90021

T: 213.271.1932

AV CONSULTANT

CHRISTIAN MADARANG

675 PLACENTIA AVE, SUITE 325

BREA, CA 92821

T: 714.982.5877



LICENSED DESIGN PROFESSIONAL IN

RESPONSIBLE CHARGE

Registration:

ISSUE FOR BID

MFP DD

No. Description

Date

08.12.2026

07.13.2026

MECHANICAL DEVICES

POWER DEVICES

SHIMODA
DESIGN GROUP

ARCHITECTURE
INTERIORS + PLANNING

EXTRASU
837 TRACTION AVENUE, SUITE 101
LOS ANGELES, CALIFORNIA 90013
T: 213-596-1771 F: 213-596-1772

THE HONEST COMPANY
PLAYA VISTA OFFICE
12121 BLUFF CREEK DRIVE
PLAYA VISTA, CA 90094

CLIENT
THE HONEST COMPANY
12130 MILLENNIUM DRIVE, SUITE 500
LOS ANGELES, CA 90094

ARCHITECT
SHIMODA DESIGN GROUP
JOEY SHIMODA, FAIA
SUSAN CHANG, AIA
837 TRACTION AVENUE, SUITE 101
LOS ANGELES, CA 90013
T: 213.596.1771

MECHANICAL/ELECTRICAL/PLUMBING
ENGINEERS
ARC ENGINEERING
MUHAMMAD ABDULHAMID, P.E.
3945 N. HOLLYWOOD WAY
BURBANK, CA 91505
T: 818.508.6300 X 201

STRUCTURAL ENGINEER
LABIB FUNK + ASSOCIATES
JACOB RODRIGUEZ, S.E.
505 N. BRAND BLVD., SUITE 800
GLENDALE, CA 91203
T: 626.351.3367


CODE CONSULTANT
SIMPSON GUMPERTZ & HEGER
NATE B. WITASEK, P.E., CFEI, LEED AP, CASP
757 S. ALAMEDA STREET, SUITE 440
LOS ANGELES, CA 90021
T: 213.271.1932

AV CONSULTANT
PLANNET
CHRISTIAN MADARANG
675 PLACENTIA AVE., SUITE 325
BREA, CA 92821
T: 714.982.5877



LICENSED DESIGN PROFESSIONAL IN
RESPONSIBLE CHARGE
Registration:

ISSUE FOR BID 08.12.2026
MEP DD 07.13.2026
No. Description Date

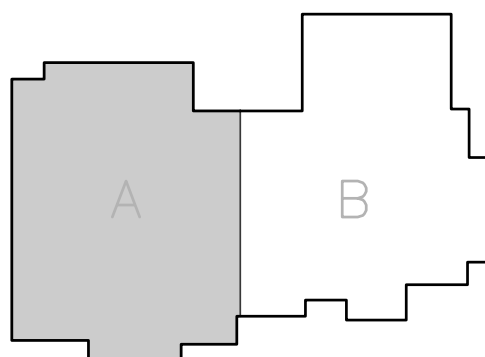

Key Plan

HVAC POWER PLAN – AREA A

1/8" = 1'-0"

E3.1A

Description

Quantity

Unit

15A, 1P SWITCH MOTOR

18

Count

20A, 1P SWITCH MOTOR

1

Count

35A, 2P NON-FUSED DISCONNECT SWITCH WP

2

Count

FIRE ALARM

Description

Quantity

Unit

SD DUCT TYPE

1

Count

POWER BRANCH

Description

Quantity

Unit

3/4" EMT, 3#12

64.9584

ft

KEYNOTES

SCALE
NO SCALE

C1

- ALL ELECTRICAL EQUIPMENT AND DEVICES LOCATED ON THE ROOF SHALL BE WEATHERPROOF WITH NEMA 3R RECEPTACLE AND IN-USE COVER.
- ALL RECEPTACLE OUTLET LOCATED ON THE ROOF SHALL BE GFCI TYPE AND WEATHERPROOF WITH NEMA 3R WITHIN USE COVER.
- FOR EXACT LOCATION OF MECHANICAL EQUIPMENT ON THE ROOF, SEE MECHANICAL PLANS.
- ALL CONDUITS ON ROOF SHALL BE RUN PARALLEL WITH STRUCTURES. PROVIDE J-BOX AT EVERY THREE 90° CONDUIT BENDS AS REQUIRED BY N.E.C.
- EXACT LOCATION OF ALL DISCONNECT SWITCH SHOWN ON THIS PLAN ARE TO BE FIELD COORDINATED WITH HVAC CONTRACTOR PRIOR TO ALL ROUGH-IN WORK.
- MAKE PROVISIONS FOR CONTROL CONDUITS TO ALL ROOF MOUNTED HVAC EQUIPMENT, WHERE DICTATED ON HVAC PLANS AND NOT SHOWN ON THIS PLAN, REMOTE CONTROL LOCATION ARE TO BE COORDINATED WITH HVAC PLANS.
- PROVIDE UNISTRUT CHANNEL SUPPORT AND BRACKETS FOR MOUNTING OF PANELBOARD, DISCONNECT SWITCHES AND RECEPTABLES WHERE NO STRUCTURE OR OTHER MEANS OF MOUNTING THE DEVICES CURRENTLY EXIST. ELECTRICAL EQUIPMENT OR DEVICES SHALL IN NO CIRCUMSTANCE SHALL BE MOUNTED OR SUPPORTED DIRECTLY FROM A ROOFTOP AHU UNIT.
- WHERE DUCT DETECTORS ARE REQUIRED PER HVAC DRAWINGS AND NOT SHOWN ON THIS PLAN, PROVIDE 3/4" FC EXTENDING DOWN TO FIRE LIFE SAFETY SYSTEM IN THE BUILDING.

BUILDING 1 – LEVEL 5 – HVAC POWER PLAN – AREA A

SCALE
1/8"=1'-0"

A2

SHEET NOTES

SCALE
NO SCALE


A1

MECHANICAL DEVICES

	Description	Quantity	Unit
■	15A, 1P SWITCH MOTOR	34	Count

MECHANICAL BRANCH

	Description	Quantity	Unit
✓	3/4"C EMT 3#12	1,111.2140	ft

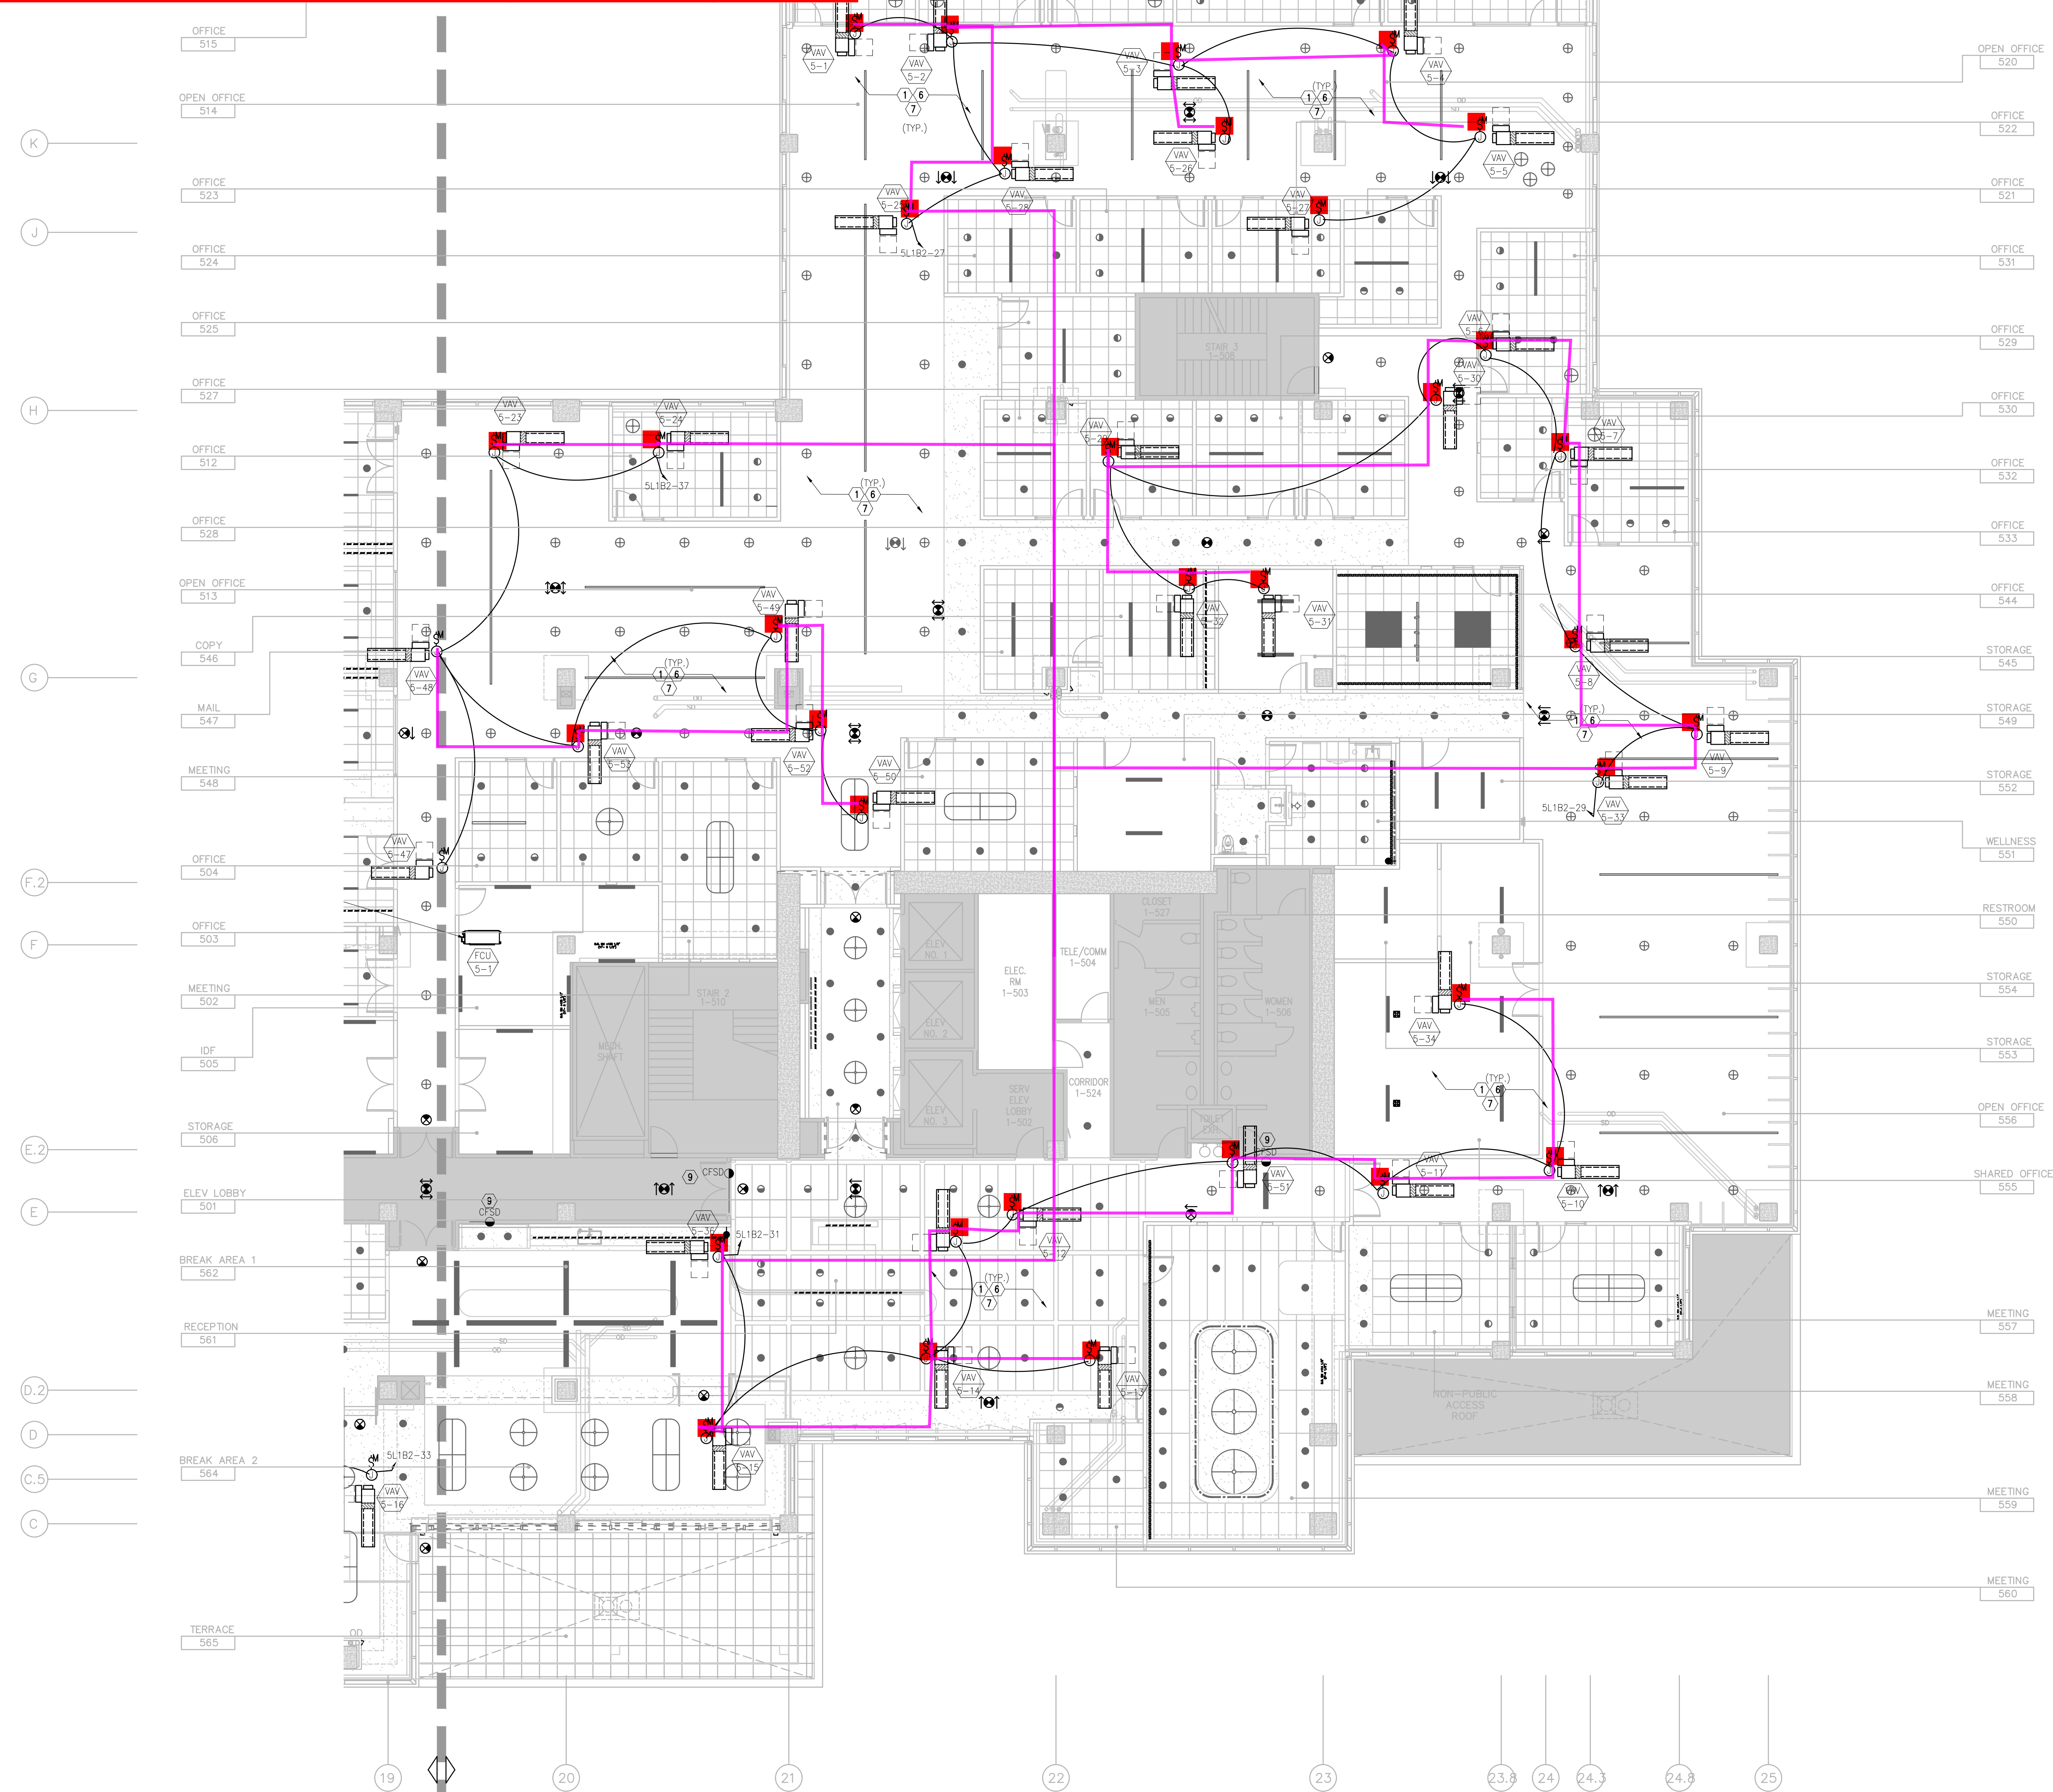

LADBS APPROVAL STAMP

1. PROVIDE AND INSTALL 3/4" CONDUIT WITH WIRES PER MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR COMPLETE AND WORKABLE INSTALLATION PER HVAC CONTROL WIRING REQUIREMENTS. VERIFY EXACT LOCATION AND REQUIREMENTS WITH HVAC CONTRACTORS.
2. PROVIDE 120V, 1-PHASE CONNECTION TO DDC CONTROL BOX (MECHANICAL TO CONFIRM).
3. PROVIDE DUCT DETECTORS PER MECHANICAL DRAWINGS AND INTERLOCK WITH FIRE ALARM SYSTEM TO SHUT DOWN THE UNIT UPON ACTIVATION OF SMOKE DETECTORS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION.
4. PROVIDE MOTOR STARTER COMPLETE WITH HOA (HAND/OFF/AUTO) SWITCH LOCKABLE DISCONNECT. STARTER SHALL BE MOUNTED INDEPENDENT OF FAN COIL WITH ALL WORKING CLEARANCES. PROVIDE WITH LIFE SAFETY SHUTOFF CONTACT AS REQUIRED.
5. PROVIDE 120V, 1-PHASE CONNECTION TO CONDENSATE PUMP EACH WITH MOTOR RATED TOGGLE SWITCH DISCONNECT. TEN (10) CONDENSATE PUMPS OR LESS PER CIRCUIT. COORDINATE WITH MECHANICAL FOR QUANTITY AND LOCATION PRIOR TO ROUGH-IN.
6. PROVIDE MOTOR RATED CONTROL. CONNECT WITH LIFE SAFETY SYSTEM FOR OVERSPEED AS NEEDED. PROVIDE LIFE SAFETY RELAY CONTACT AS REQUIRED. AMPERAGE PER UNIT REQUIREMENTS.
7. PROVIDE 120V, 1-PHASE CONNECTION TO VAV. TEN (10) VAV OR LESS PER CIRCUIT. COORDINATE WITH MECHANICAL FOR QUANTITY AND LOCATION PRIOR TO ROUGH-IN.
8. UNIT ALSO HAS AN ACCOMPANYING ROOFTOP UNIT. REFER TO MECHANICAL PLANS FOR FURTHER INFORMATION. INDOOR UNIT IS POWERED BY OUTDOOR UNIT.
9. PROVIDE 120V, 1-PHASE CIRCUIT CONNECTION TO CSFD. TEN (10) CSFD OR LESS PER CIRCUIT. COORDINATE WITH MECHANICAL FOR QUANTITY AND LOCATION PRIOR TO ROUGH-IN. POWER VIA CIRCUIT 5L1B2-39.
10. PROVIDE A WEATHER PROOF (WP) "EXTRA DUTY" TYPE ENCLOSURE FOR WEATHER RESISTANT (WR) GFCI RECEPTACLE WITH GALVANIZED STEEL UNISTRUT CHANNEL SUPPORTS, TO BE LOCATED WITHIN 25FT RADIUS OF MECHANICAL EQUIPMENT. CONSULT WITH ARCHITECT PRIOR TO ROUGH-IN.

KEYNOTES

SCALE
NO SCALE

C1

1. ALL ELECTRICAL EQUIPMENT AND DEVICES LOCATED ON THE ROOF SHALL BE WEATHERPROOF WITH NEMA 3R RECEPTACLE AND IN-USE COVER.
2. ALL RECEPTACLE OUTLET LOCATED ON THE ROOF SHALL BE GFCI TYPE AND WEATHERPROOF WITH NEMA 3R WITHIN USE COVER.
3. FOR EXACT LOCATION OF MECHANICAL EQUIPMENT ON THE ROOF, SEE MECHANICAL PLANS.
4. ALL CONDUITS ON ROOF SHALL BE RUN PARALLEL WITH STRUCTURES. PROVIDE J-BOX AT EVERY THREE 90° CONDUIT BENDS AS REQUIRED BY N.E.C.
5. EXACT LOCATION OF ALL DISCONNECT SWITCH SHOWN ON THIS PLAN ARE TO BE FIELD COORDINATED WITH HVAC CONTRACTOR PRIOR TO ALL ROUGH-IN WORK.
6. MAKE PROVISIONS FOR CONTROL CONDUITS TO ALL ROOF MOUNTED HVAC EQUIPMENT, WHERE DICTATED ON HVAC PLANS AND NOT SHOWN ON THIS PLAN. REMOTE CONTROL LOCATION ARE TO BE COORDINATED WITH HVAC PLANS.
7. PROVIDE UNISTRUT CHANNEL SUPPORT AND BRACKETS FOR MOUNTING OF PANELBOARD, DISCONNECT SWITCHES AND RECEPTABLES WHERE NO STRUCTURE OR OTHER MEANS OF MOUNTING THE DEVICES CURRENTLY EXIST. ELECTRICAL EQUIPMENT OR DEVICES SHALL IN NO CIRCUMSTANCE SHALL BE MOUNTED OR SUPPORTED DIRECTLY FROM A ROOFTOP AHU UNIT.
8. WHERE DUCT DETECTORS ARE REQUIRED PER HVAC DRAWINGS AND NOT SHOWN ON THIS PLAN, PROVIDE 3/4" EXTENDING DOWN TO FIRE LIFE SAFETY SYSTEM IN THE BUILDING.

S H I M O D A
D E S I G N G R O U P

A R C H I T E C T U R E
I N T E R I O R S + P L A N N I N G

E X T R A S U
837 Traction Avenue, Suite 101
Los Angeles, California 90013
T: 213-596-1771 F: 213-596-1772

THE HONEST COMPANY
PLAYA VISTA OFFICE
12121 BLUFF CREEK DRIVE
PLAYA VISTA, CA 90094

C U E N T
THE HONEST COMPANY
12130 MILLENNIUM DRIVE, SUITE 500
LOS ANGELES, CA 90094

A R C H I T E C T
SHIMODA DESIGN GROUP
JOEY SHIMODA, FAIA
SUSAN CHANG, AIA
837 TRACTION AVENUE, SUITE 101
LOS ANGELES, CA 90013
T: 213.596.1771

M E C H A N I C A L / E L E C T R I C A L / P L U M B I N G
E N G I N E E R S
ARC ENGINEERING
MUHAMMAD ABDULHAMID, P.E.
3945 N. HOLLYWOOD WAY
BURBANK, CA 91505
T: 818.508.6300 X 201

S T R U C T U R A L E N G I N E E R
LABIB FUNK + ASSOCIATES
JACOB RODRIGUEZ, S.E.
505 N. BRAND BLVD, SUITE 800
GLENDALE, CA 91203
T: 626.351.3367


C O D E C O N S U L T A N T
SIMPSON GUMPERTZ & HEGER
NATE B. WITASEK, P.E., CFEI, LEED AP, CASP
757 S. ALAMEDA STREET, SUITE 440
LOS ANGELES, CA 90021
T: 213.271.1932

A V C O N S U L T A N T
PLANNET
CHRISTIAN MADARANG
675 PLACENTIA AVE, SUITE 325
BREA, CA 92821
T: 714.982.5877



L I C E N S E D D E S I G N P R O F E S S I O N A L I N
R E S P O N S I B L E C H A R G E
Registration:

I S S U E F O R B I D
M E P D D
No. Description Date

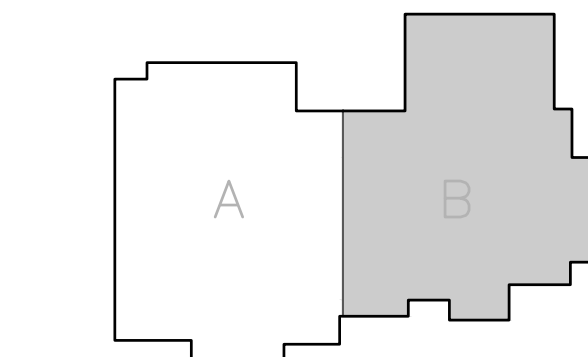

Key Plan

H V A C P O W E R P L A N – A R E A
B

1/8" = 1'-0"

E3.1B

BUILDING 1 – LEVEL 5 – HVAC POWER PLAN – AREA B

SCALE
1/8"=1'-0"

A2

SHEET NOTES

SCALE
NO SCALE

A1




PROJECT NO: 22 414

LIGHTING COUNT			
	Description	Quantity	Unit
●	A2	4	Count
●	A4	13	Count
●	A4	32	Count
●	A4 EM	7	Count
●	A4 EM	9	Count
●	A5	3	Count
●	A5 EM	3	Count
●	A7	8	Count
●	A8	3	Count
●	A8 EM	4	Count
／	B2	169.8500	ft
／	B3	112.0878	ft
／	B4	18.0000	ft
／	B6	336.0121	ft
／	B6 EM	8.0000	ft
■	B7	5	Count
●	C1	18	Count
●	C1 EM	7	Count
●	C2	8	Count
●	C2 EM	6	Count
■	C3	9	Count
●	C6	2	Count
／	C8	8.0000	ft
●	C10	9	Count
●	C11	3	Count
●	F1	12	Count

LIGHTING DEVICES			
	Description	Quantity	Unit
◆	2D	6	Count
◆	4D	10	Count
◆	30W RPD	1	Count
◆	60W RPD	5	Count
◆	75W RPD	3	Count
◆	D	3	Count
◆	nPOD	2	Count
◆	OP CEILING	3	Count
◆	OS CEILING	37	Count

LIGHTING BRANCH			
	Description	Quantity	Unit
／	3/4" EMT, 3#12	175.7586	ft
／	3/4"C EMT, 3#10	185.2291	ft

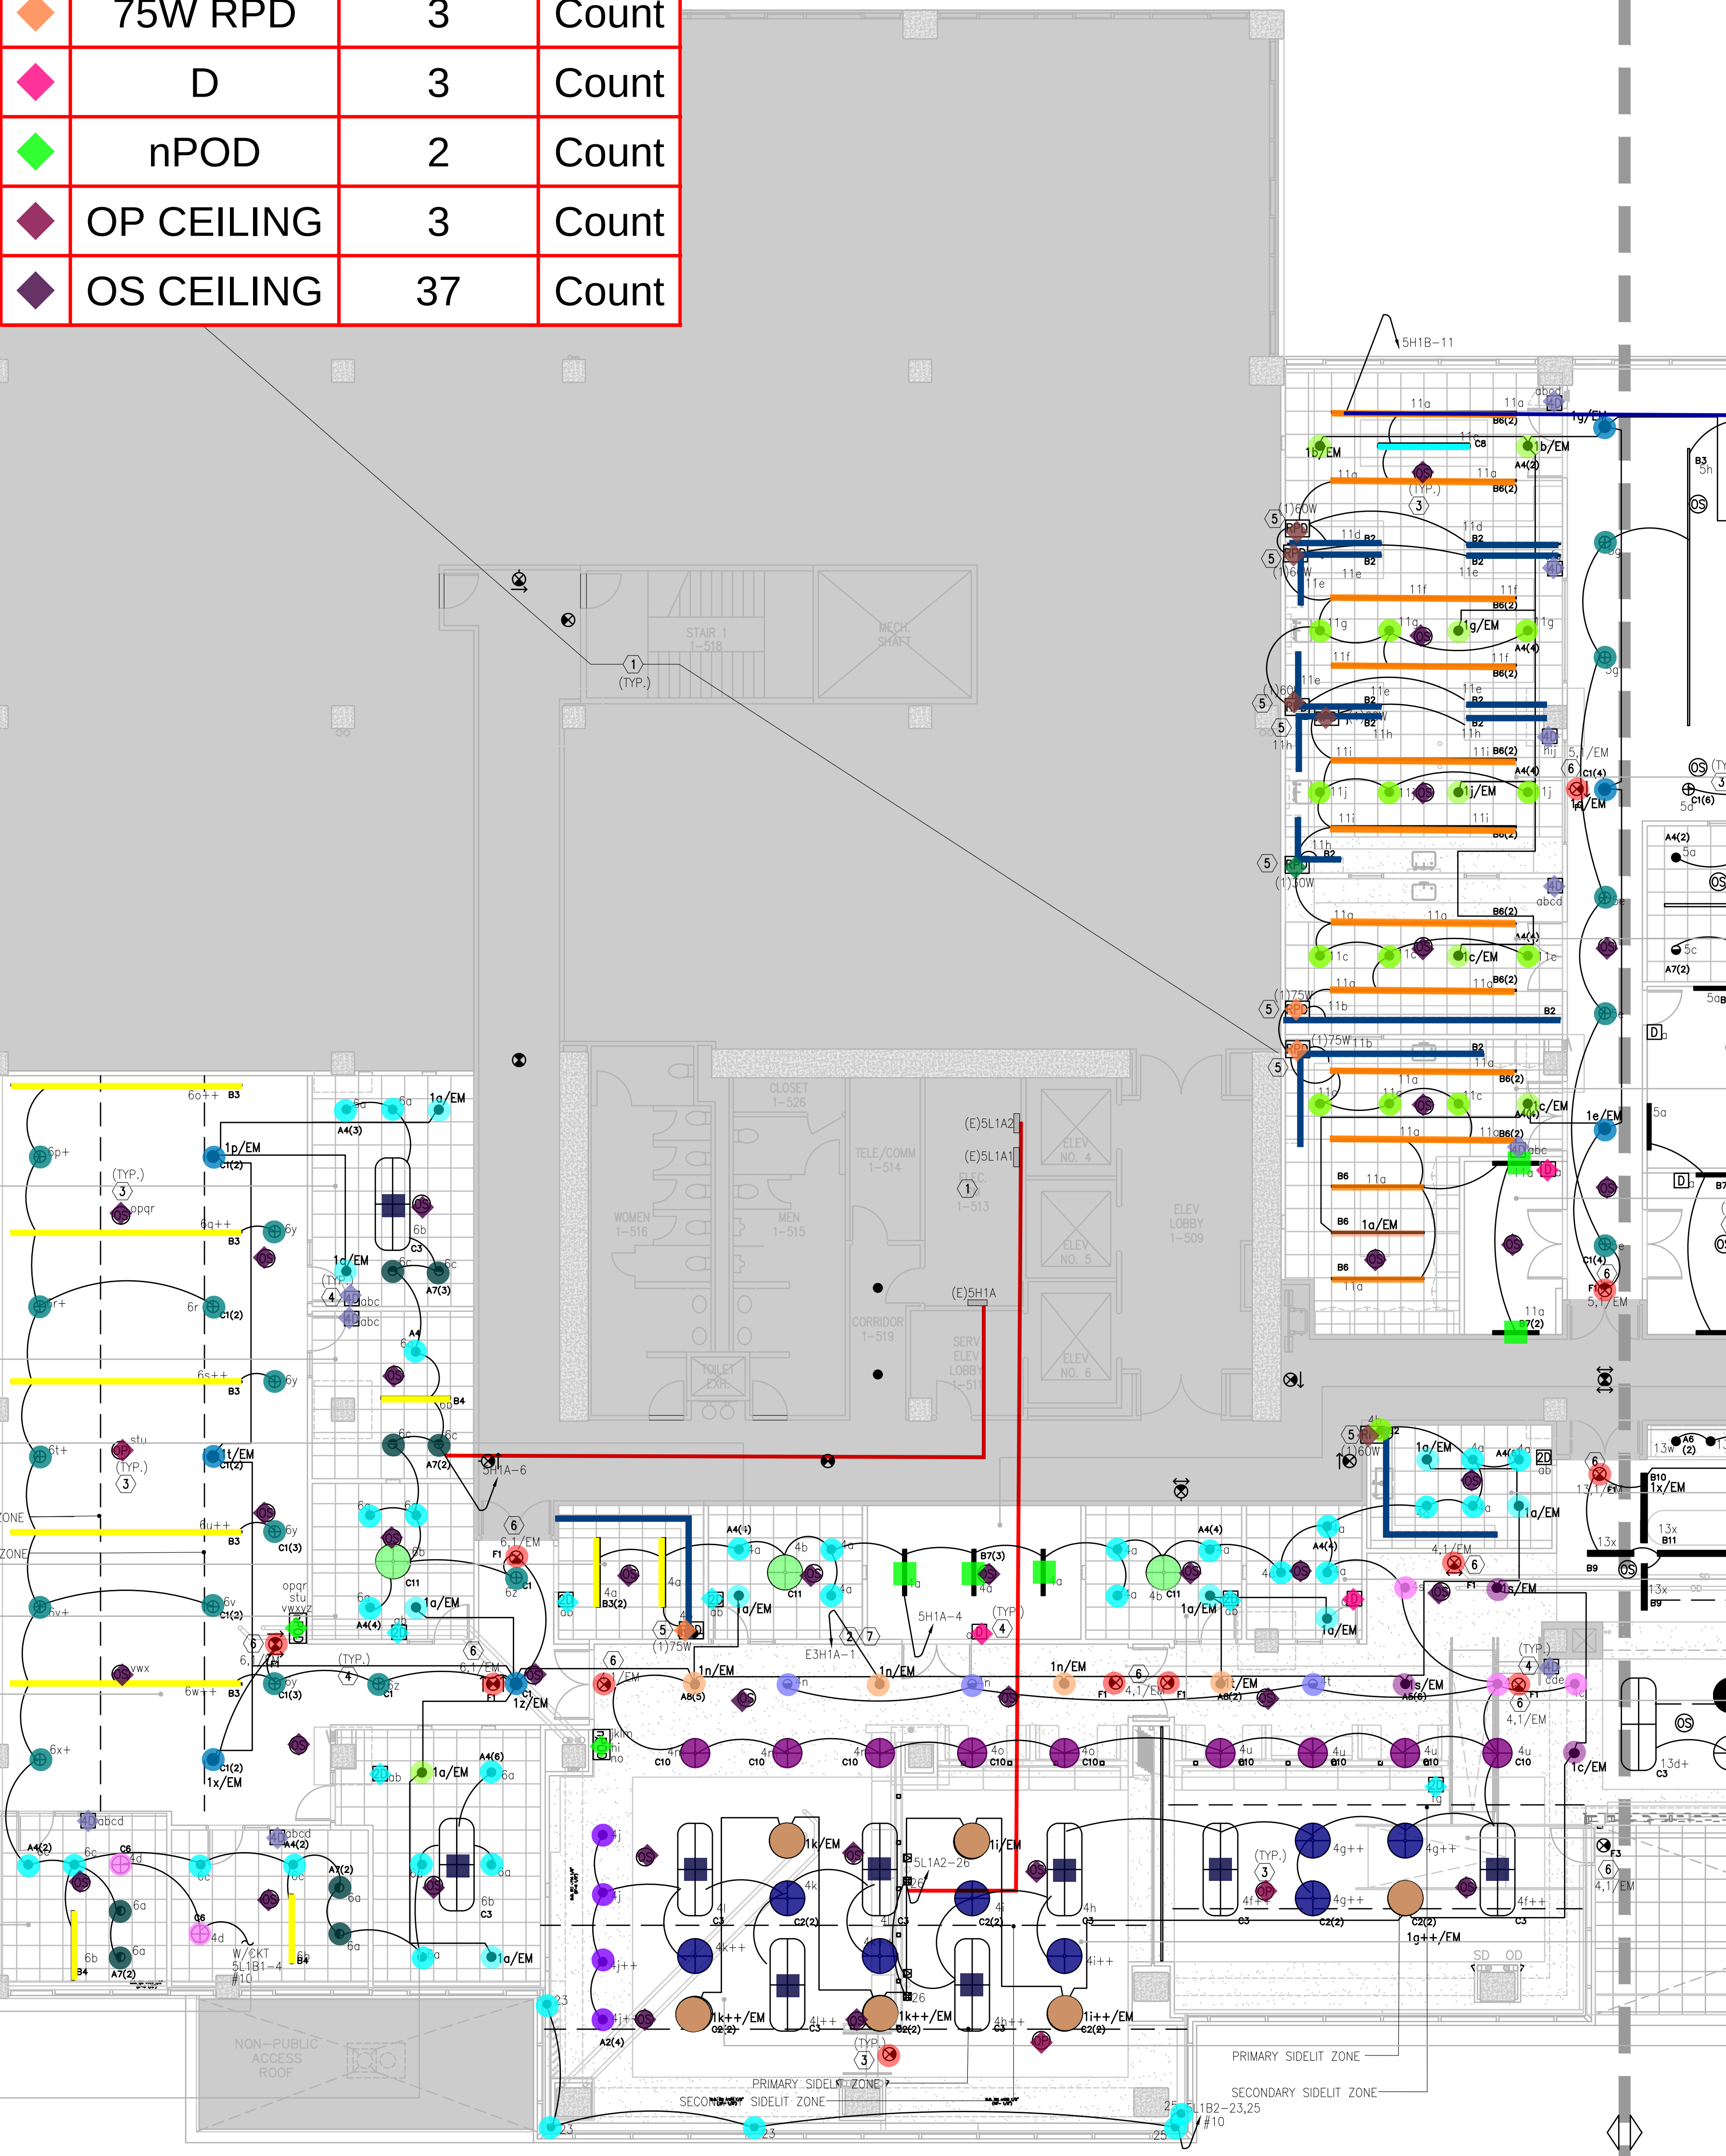

LADBS APPROVAL STAMP

- ALL EXISTING LIGHTING FIXTURE AND THEIR CONTROLS IN THIS AREA NOT PART OF THIS SCOPE OF WORK ARE TO REMAIN. ELECTRICAL CONTRACTOR TO MAINTAIN THE CONTINUITY OF EXISTING BRANCH CIRCUIT WIRING.
- ALL LIGHTING FIXTURES SHOWN WITH "EM" AND SHADED ARE EMERGENCY. CONNECT ALL EMERGENCY LIGHTS TO EXISTING 277V EMERGENCY CIRCUIT ASSIGNED TO THIS FLOOR. ELECTRICAL CONTRACTOR TO FIELD VERIFY EXACT CIRCUIT NUMBER.
- PROVIDE REQUIRED OCCUPANCY SENSORS, DAYLIGHT SENSORS, AND ADDITIONAL REQUIRED POWER PACKS THROUGHOUT. LOCATE SENSORS TO PROVIDE MAXIMUM COVERAGE PER MANUFACTURER'S RECOMMENDATIONS. FOR OCCUPANCY SENSORS IN PRIVATE OFFICES (</=250SQFT), CONFERENCE ROOMS AND MULTIPURPOSE ROOMS (<1000SQFT), THE OCCUPANCY SENSOR SHALL SERVE AS A PARTIAL-ON OCCUPANCY SENSOR (LIGHTING POWER TURNS ON TO 50-70%). REFER TO DETAIL SHEET E032 FOR FURTHER DETAILS.
- PROVIDE WALL MOUNTED LOW VOLTAGE SCENE SELECTOR OR SLIDE DIMMER (TYP.). VERIFY EXACT LOCATION WITH THE ARCHITECT.
- PROVIDE A REMOTELY LOCATED ACCESSIBLE DRIVER TO POWER UNDERCABINET LIGHT
- DETERMINE BEST LOCATIONS/PLACEMENTS FOR POWER SUPPLY/DRIVERS.
- NEW EXIT SIGNS SHALL BE (2) CIRCUIT FEED EXIT. CONNECT TO NEAREST EMERGENCY BRANCH CIRCUIT AND NEAREST NORMAL BRANCH CIRCUIT. SEE EXIT SIGN DETAIL ON THIS SHEET.
- PROVIDE CURRENT LIMITER FOR TRACKLIGHTS. ELECTRICAL CONTRACTOR TO DETERMINE BEST LOCATION/PLACEMENT FOR DEVICES.

KEYNOTES

SCALE	NO SCALE	D1

- NO EQUIPMENT JUNCTION BOXES, ETC. REQUIRING ACCESS SHALL BE LOCATED IN HARD CEILING AREAS (UNLESS ACCESS PANEL IS PROVIDED, COORDINATE WITH THE ARCHITECT).
- VERIFY THE TYPE OF CEILING SYSTEM WITH GENERAL CONTRACTOR OR CEILING CONTRACTOR. PROVIDE FIXTURES WHICH ARE COMPATIBLE WITH THE CEILING SYSTEM AND INCLUDE ALL REQUIRED MOUNTING ACCESSORIES AND HARDWARE.
- SUPPORT CEILING MOUNTED LIGHTING FIXTURES DIRECTLY FROM THE BUILDING STRUCTURE. DO NOT SUPPORT FIXTURES FROM PIPING, DUCTWORK OR ANY OTHER EQUIPMENT, OR SOLELY FROM THE SUSPENDED CEILING.
- WHERE MULTIPLE SWITCHES ARE INDICATED, SWITCHES SHALL BE GANGED UNDER A COMMON WALL PLATE.
- ALL SWITCH LOCATIONS SHALL BE VERIFIED WITH THE ARCHITECT PRIOR TO ROUGH IN.
- ALL EXPOSED CONDUITS SHALL BE EMT AND SHALL BE RUN 90 DEGREES PERPENDICULAR AND PARALLEL TO CEILING STRUCTURE AND HUG TO UNDERSIDE OF SLAB.
- CONTRACTOR SHALL PROVIDE ADDITIONAL EXIT SIGN(S) IF REQUIRED BY THE CITY FIRE MARSHALL, INSPECTOR AT AN ADDITIONAL COST TO THE OWNER.
- CONTRACTOR SHALL VERIFY VOLTAGES FOR ALL FIXTURES PRIOR TO ORDERING. ALL PENDANT FIXTURES SHALL BE PROVIDED WITH SUFFICIENT STEM OR SUSPENSION CABLE LENGTH PRIOR TO INSTALLATION. VERIFY LENGTHS WITH ARCHITECT.
- CONTRACTOR SHALL PROVIDE ALL NECESSARY HARDWARE, ELECTRICAL CABLE, TIMERS, TRANSFORMERS, ETC., AS REQUIRED FOR COMPLETION OF INSTALLATION. WHERE LOW VOLTAGE FIXTURES ARE NOT EQUIPPED WITH STEP DOWN TRANSFORMER, PROVIDE TRANSFORMER OF REQUIRED SIZE AND RATING TO ACCOMMODATE CONNECTED LIGHTING LOAD.
- ANY FIXTURE SUBSTITUTION MUST BE APPROVED BY THE ARCHITECT AND/OR LIGHTING DESIGNER PRIOR TO BID. CONTRACTOR MUST BE PREPARED TO SUPPLY A SAMPLE AND/OR PHOTOMIC DATA IF REQUIRED. IF SUBSTITUTION IS REJECTED, CONTRACTOR MUST BE PREPARED TO PROVIDE SPECIFIED PRODUCT WITHOUT DELAY.
- DRAWING SHOWS CIRCUITING AND SWITCHING REQUIREMENTS AND FIXTURE TYPES ONLY. VERIFY EXACT LIGHTING FIXTURES AND STANDARD SWITCHING WITH ARCHITECT AND OWNER PRIOR TO INSTALLATION. ALSO VERIFY EXACT LIGHTING FIXTURES VOLTAGE AND FINISH PRIOR TO INSTALLATION.
- PROVIDE AND INSTALL #10 WIRES FOR 120V CIRCUIT HOME RUNS MORE THAN 100'-0".
- VERIFY UNISTRUT CHANNEL SUPPORT AND BRACKETS FOR MOUNTING OF J-BOX FOR SIGN WHERE NO STRUCTURE OR OTHER MEANS OF MOUNTING THE DEVICES CURRENTLY EXIST.
- ALL FIXTURES THAT HAVE A LABEL SHOWING CIRCUIT NUMBER AND A SWITCH LEG SHOW WHICH RELAY IT IS CONNECTED TO. FOR DAYLIGHT CONTROLS THE SWITCH LEG IS FOLLOWED BY X NUMBER OF "+" SIGNS. THE "+" SIGNS INDICATE THAT THE FIXTURE THAT IS ON THE SAME SWITCH LEG IS CONNECTED TO SEPARATE DIMMERS OF THE ROOM CONTROLLER PER WIRING DIAGRAM. SEE DETAIL SHEET E032. A GENERIC EXAMPLE MAY BE LABELS: "1A" "1A+" AND "1A++" SIGNIFY THAT THE FIXTURE IS TIED TO CIRCUIT 1. "A" SIGNIFIES IT IS ON RELAY X, MANUAL DIMMING. "A+" SIGNIFIES THAT IT IS ON RELAY X, SECONDARY DAYLIGHT ZONE. "A++" SIGNIFIES THAT IT IS ON RELAY X, PRIMARY DAYLIGHT ZONE.
- EXIT SIGNS LOCATIONS SHALL BE COORDINATED AND APPROVED BY FIRE MARSHALL.
- PROVIDE ADDITIONAL EXIT SIGN PRE FIRE MARSHALL REQUEST. (TYPICAL ALL LIGHTING PLANS).
- EMERGENCY LIGHTING CIRCUITS SHALL BE IN A SEPARATE RACEWAY FROM NORMAL LIGHTING CIRCUITS.
- CONTRACTOR TO CONFIRM WINDOW HEAD HEIGHT AND SEPARATION OF PRIMARY AND SECONDARY DAYLIGHT ZONES.
- CONTRACTOR SHALL PROVIDE AND INSTALL LIGHTING DEMAND AND RESPONSE SYSTEM PER CALIFORNIA ENERGY CODE 2022 SECTION 110.12(C). CONTRACTOR SHALL CONFIGURE THE LIGHTING SYSTEM TO ACHIEVE MINIMUM OF 15% BELOW THE TOTAL INSTALLED LIGHTING POWER.
- ANY DEVICES CONTROLLER EMERGENCY CIRCUITS/FIXTURES TO HAVE UL 924 CERTIFICATION OR AHJ APPROVED EQUIVALENT.

SHEET NOTES

SCALE	NO SCALE	B1

- WALL SWITCH/DIMMER SCHEDULE: DAYLIGHT SENSOR SCHEDULE:
1. nPODM DX WALL DIMMER ON/OFF-RAISE/LOWER 2. nCM ADC/ADCK DUAL ZONE
3. nPODM 2P DX WALL DIMMER ON/OFF-RAISE/LOWER (2P= TWO CHANNELS) 4. nPODM 4P DX WALL DIMMER ON/OFF-RAISE/LOWER (4P= FOUR CHANNELS)
5. nPODM 6P DX WALL DIMMER ON/OFF-RAISE/LOWER (6P= SIX CHANNELS)
- OCCUPANCY SENSOR SCHEDULE:
6. nWSX (PDT) LV WALL SWITCH OCCUPANCY SENSOR PASSIVE INFRARED & MICROPHONIC (DUAL TECH) COVERAGE: (40'x20') 180' 500 SQ FT
7. nCM (PDT) 9 SMALL MOTION CEILING OCCUPANCY SENSOR PASSIVE INFRARED & MICROPHONIC (DUAL TECH) (24" DIA) 360' CIRCULAR COVERAGE
8. nCM (PDT) 9-ADCK SMALL MOTION CEILING OCCUPANCY SENSOR PASSIVE INFRARED & MICROPHONIC (DUAL TECH) (24" DIA) 360' CIRCULAR COVERAGE PHOTOCELL

S H I M O D A
D E S I G N G R O U P

A R C H I T E C T U R E
I N T E R I O R S + P L A N N I N G

E X T R A S U
837 Traction Avenue, Suite 101
Los Angeles, California 90013
T: 213-596-1771 F: 213-596-1772

THE HONEST COMPANY
PLAYA VISTA OFFICE
12121 BLUFF CREEK DRIVE
PLAYA VISTA, CA 90094

CLIENT
THE HONEST COMPANY
12130 MILLENNIUM DRIVE, SUITE 500
LOS ANGELES, CA 90094

ARCHITECT
SHIMODA DESIGN GROUP
JOEY SHIMODA, FAIA
SUSAN CHANG, AIA
837 TRACTION AVENUE, SUITE 101
LOS ANGELES, CA 90013
T: 213.596.1771

MECHANICAL/ELECTRICAL/PLUMBING
ENGINEERS
ARC ENGINEERING
MUHAMMAD ABDULHAMID, P.E.
3945 N. HOLLYWOOD WAY
BURBANK, CA 91505
T: 818.508.6300 X 201

STRUCTURAL ENGINEER
LABIB FUNK + ASSOCIATES
JACOB RODRIGUEZ, S.E.
505 N. GRAND BLVD, SUITE 800
GLENDALE, CA 91203
T: 626.351.3367


CODE CONSULTANT
SIMPSON GUMPERTZ & HEGER
NATE B. WITASEK, P.E., CFE, LEED AP, CASP
757 S. ALAMEDA STREET, SUITE 440
LOS ANGELES, CA 90021
T: 213.271.1932

AV CONSULTANT
PLANNET
CHRISTIAN MADARANG
675 PLACENTIA AVE, SUITE 325
BREA, CA 92821
T: 714.982.5877



LICENSED DESIGN PROFESSIONAL IN
RESPONSIBLE CHARGE
Registration:

ISSUE FOR BID 08.12.2026
MEP DD 07.13.2026
No. Description Date

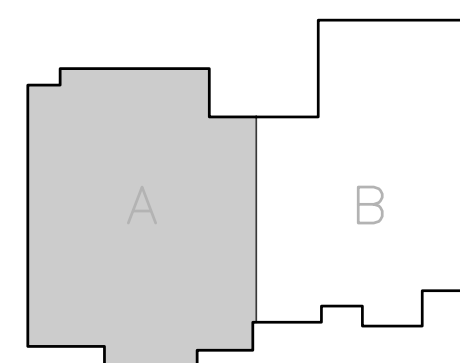

Key Plan

LIGHTING PLAN - AREA A

1/8" = 1'-0"

E4.1A

PROJECT NO: 22 414

BUILDING 1 - LEVEL 5 - LIGHTING PLAN - AREA A


SCALE
1/8"=1'-0"

Light Equipment Schedules

SCALE
NO SCALE

A1

LIGHTING COUNT			
	Description	Quantity	Unit
	A3	11	Count
	A3 EM	4	Count
	A4	23	Count
	A4	28	Count
	A4 EM	4	Count
	A4 EM	5	Count
	A5	27	Count
	A5 EM	8	Count
	A6	12	Count
	A6 EM	4	Count
	A7	55	Count
	A7 EM	5	Count
	B1	52.9767	ft
	B2	126.4276	ft
	B3	289.0237	ft
	B4	90.0174	ft
	B5 BULB	3	Count
	B5 TRACK	7.0014	ft
	B7	18	Count
	B7 EM	1	Count
	B8	2	Count
	B9	6	Count
	B10	6.0000	ft
	B10 EM	11.9907	ft
	B11	20.0000	ft
	C1	58	Count
	C1 EM	14	Count
	C2	4	Count
	C2 EM	2	Count
	C3	8	Count
	C4	1	Count
	C5	2	Count
	C6	3	Count
	C6	6	Count
	C7	4	Count
	C9A	1	Count
	C9B	5	Count
	C11	1	Count
	D1	1	Count
	F1	22	Count

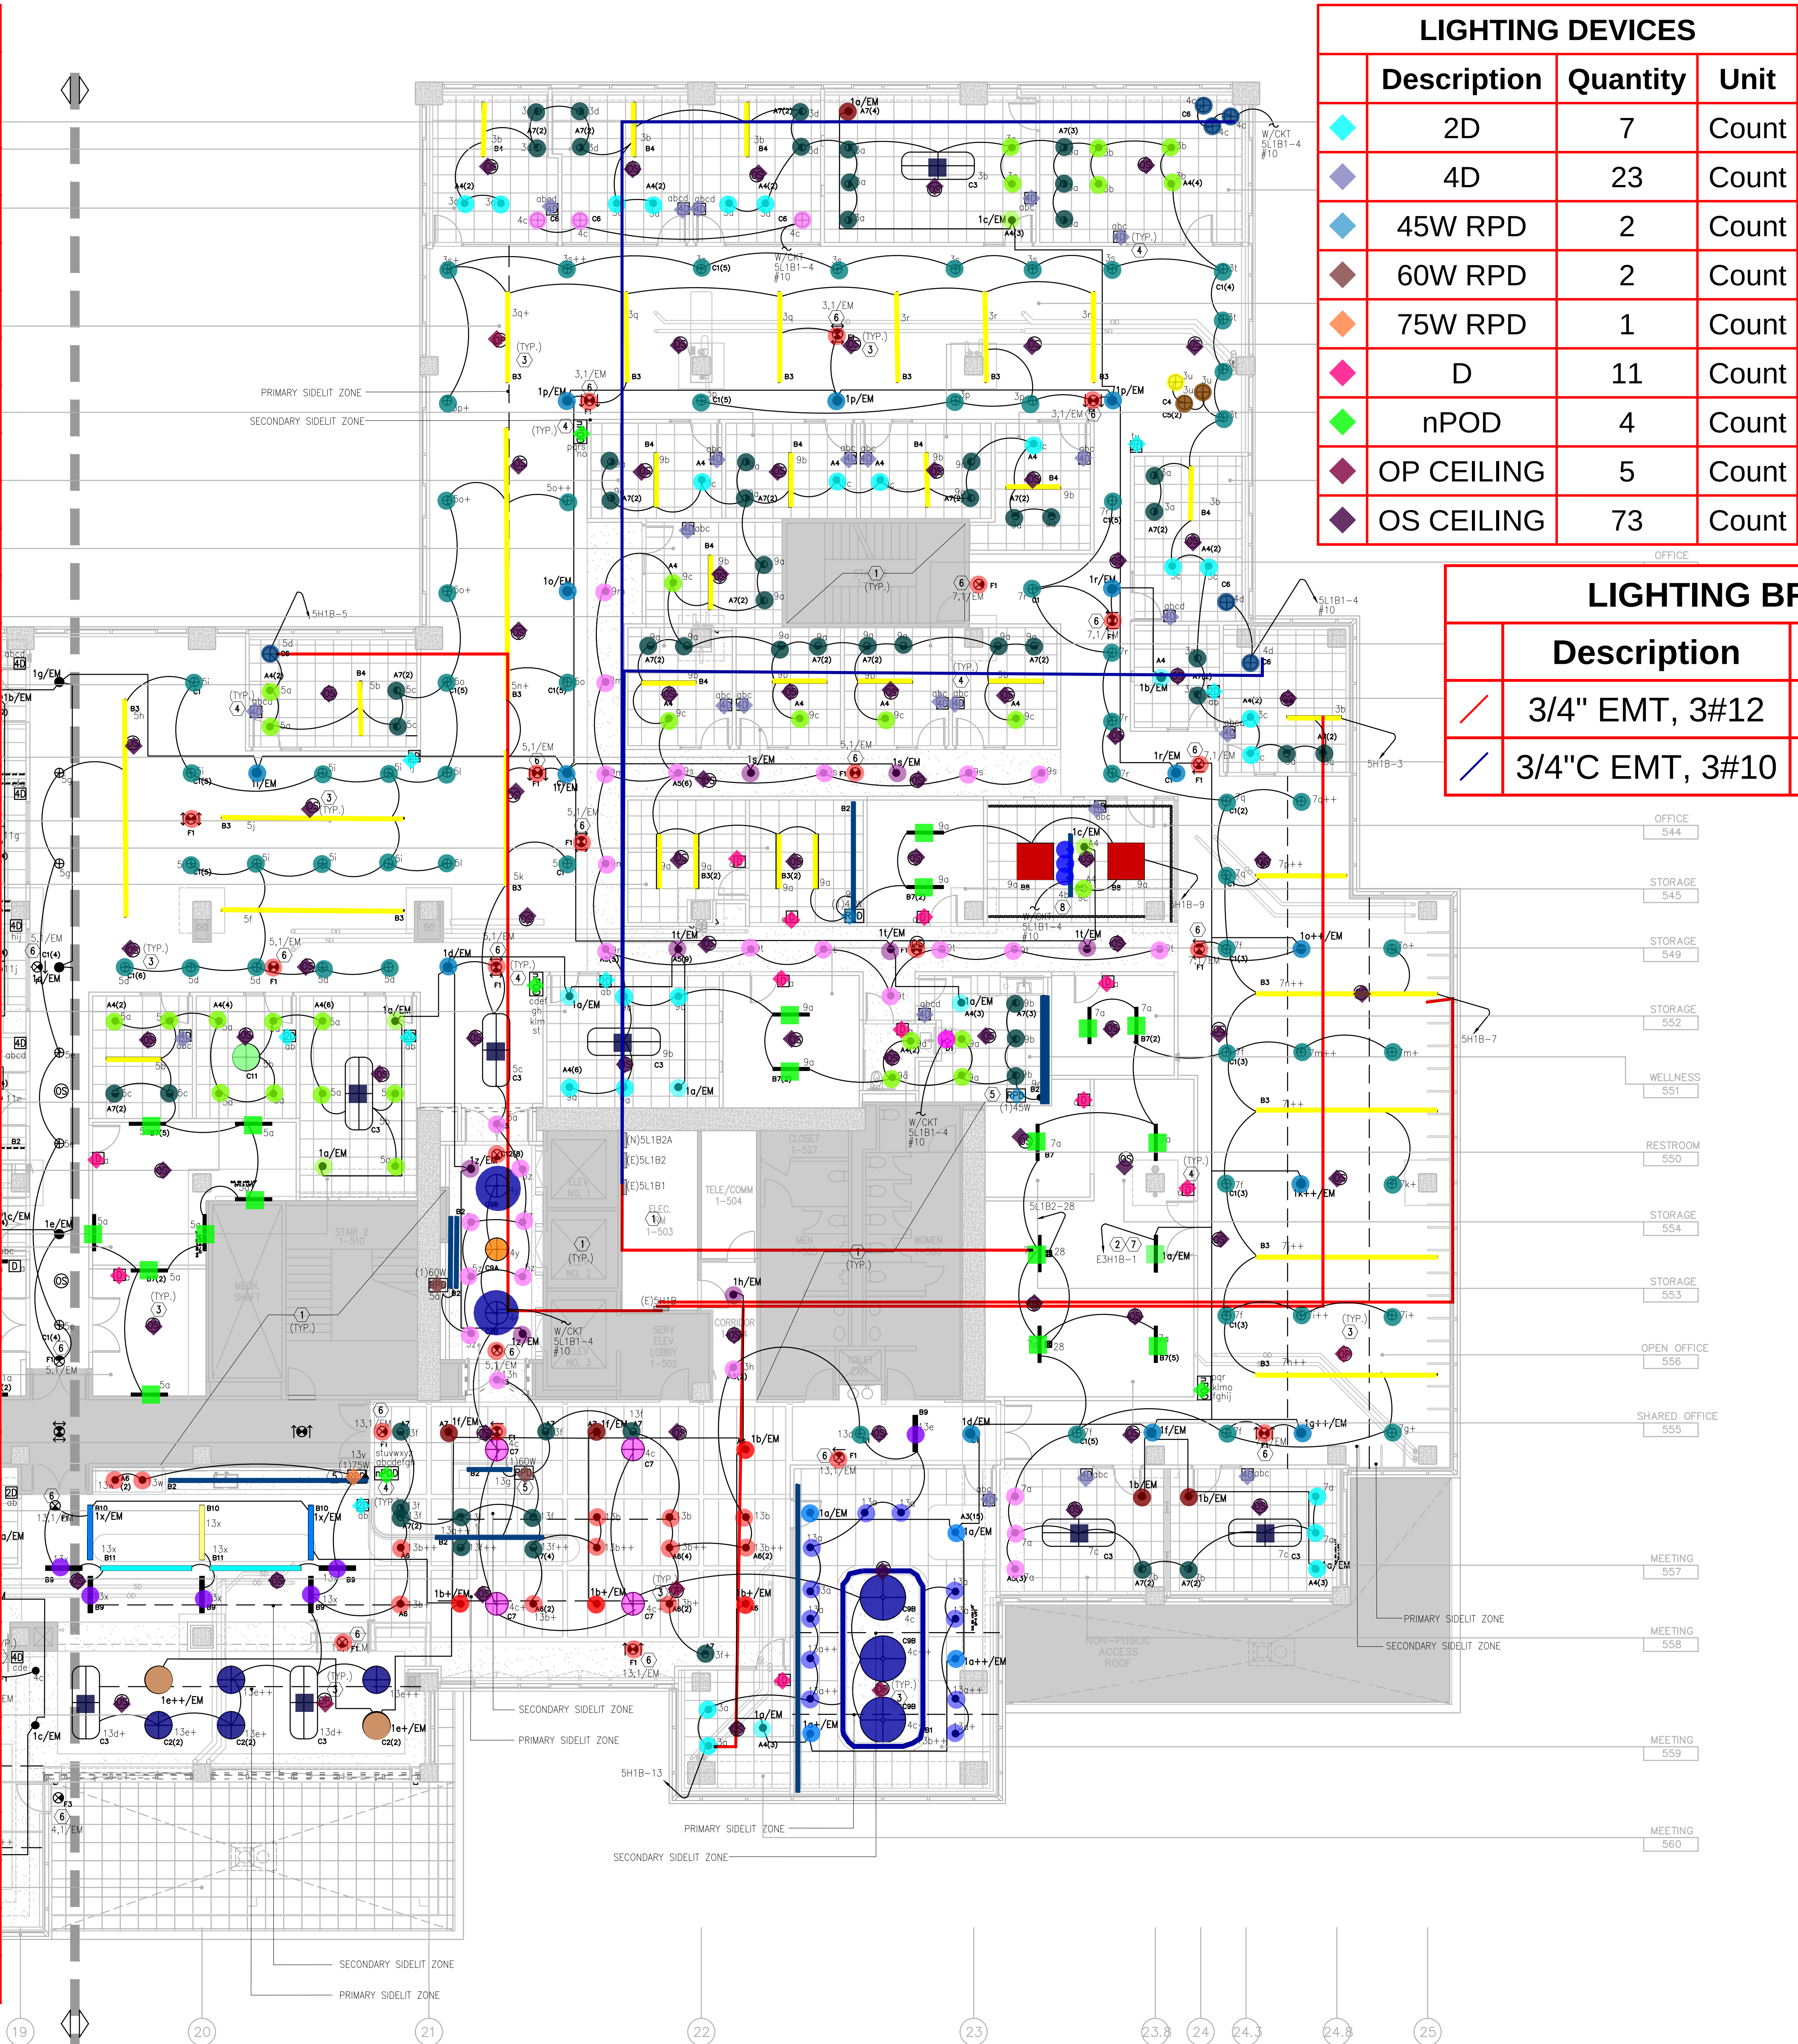

LADBS APPROVAL STAMP

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

ALL EXISTING LIGHTING FIXTURES AND THEIR CONTROLS IN THIS AREA NOT PART OF THIS SCOPE OF WORK ARE TO REMAIN. ELECTRICAL CONTRACTOR TO MAINTAIN THE CONTINUITY OF EXISTING BRANCH CIRCUIT WIRING.

ALL LIGHTING FIXTURES SHOWN WITH "EM" AND SHADED ARE EMERGENCY. CONNECT ALL EMERGENCY LIGHTS TO EXISTING 277V EMERGENCY CIRCUIT ASSIGNED TO THIS FLOOR. ELECTRICAL CONTRACTOR TO FIELD VERIFY EXACT CIRCUIT NUMBER.

PROVIDE REQUIRED OCCUPANCY SENSORS, DAYLIGHT SENSORS, AND ADDITIONAL REQUIRED POWER PACKS THROUGHOUT. LOCATE SENSORS TO PROVIDE MAXIMUM COVERAGE PER MANUFACTURER'S RECOMMENDATIONS. FOR OCCUPANCY SENSORS IN PRIVATE OFFICES (<2500SFT), CONFERENCE ROOMS AND MULTIPURPOSE ROOMS (<1000SFT), THE OCCUPANCY SENSOR SHALL SERVE AS A PARTIAL-ON OCCUPANCY SENSOR (LIGHTING POWER TURNS ON TO 50-70%). REFER TO DETAIL SHEET E032 FOR FURTHER DETAILS.

PROVIDE WALL MOUNTED LOW VOLTAGE SCENE SELECTOR OR SLIDE DIMMER (TYP.). VERIFY EXACT LOCATION WITH THE ARCHITECT.

PROVIDE A REMOTELY LOCATED ACCESSIBLE DRIVER TO POWER UNDERCABINET LIGHT QUANTITIES WITH MANUFACTURER AND WER SUPPLY/DRIVERS.

CONNECT TO NEAREST EMERGENCY CIRCUIT. SEE EXIT SIGN DETAIL ON THIS SHEET.

EXISTING CIRCUIT HOMERUNS SHOWN WITHIN THE SCOPE OF WORK. WHEN FEEDERS ARE TO BE SIZED TO MATCH EXISTING CIRCUIT, ELECTRICAL CONTRACTOR TO PROVIDE SIZES.

ACCESS TO ELECTRICAL PANEL IS PROVIDED. COORDINATE WITH THE ARCHITECT.

VERIFY THE TYPE OF CEILING SYSTEM WITH GENERAL CONTRACTOR OR CEILING CONTRACTOR. PROVIDE FIXTURES WHICH ARE COMPATIBLE WITH THE CEILING SYSTEM AND INCLUDE ALL REQUIRED MOUNTING ACCESSORIES AND HARDWARE.

SUPPORT CEILING MOUNTED LIGHTING FIXTURES DIRECTLY FROM THE BUILDING STRUCTURE. DO NOT SUPPORT FIXTURES FROM PIPING, DUCTWORK OR ANY OTHER EQUIPMENT, OR SOLELY FROM THE SUSPENDED CEILING.

WHERE MULTIPLE SWITCHES ARE INDICATED, SWITCHES SHALL BE GANGED UNDER A COMMON WALL PLATE.

ALL SWITCH LOCATIONS SHALL BE VERIFIED WITH THE ARCHITECT PRIOR TO ROUGH IN.

ALL EXPOSED CONDUITS SHALL BE EMT AND SHALL BE RUN 90 DEGREES PERPENDICULAR AND PARALLEL TO CEILING STRUCTURE AND HUG TO UNDERSIDE OF SLAB.

CONTRACTOR SHALL PROVIDE ADDITIONAL EXIT SIGN(S) IF REQUIRED BY THE CITY FIRE MARSHALL INSPECTOR AT NO ADDITIONAL COST TO THE OWNER.

CONTRACTOR SHALL VERIFY VOLTAGES FOR ALL FIXTURES PRIOR TO ORDERING.

ALL PENDANT FIXTURES SHALL BE PROVIDED WITH SUFFICIENT STEM OR SUSPENSION CABLE LENGTH PRIOR TO INSTALLATION. VERIFY LENGTHS WITH ARCHITECT.

CONTRACTOR SHALL PROVIDE ALL NECESSARY HARDWARE, ELECTRICAL CABLE, TIMERS, TRANSFORMERS, ETC., AS REQUIRED FOR COMPLETION OF INSTALLATION. WHERE LOW VOLTAGE FIXTURES ARE NOT EQUIPPED WITH STEP DOWN TRANSFORMER, PROVIDE TRANSFORMER OF REQUIRED SIZE AND RATING TO ACCOMMODATE CONNECTED LIGHTING LOAD.

ANY FIXTURE SUBSTITUTION MUST BE APPROVED BY THE ARCHITECT AND/OR LIGHTING DESIGNER PRIOR TO BID. CONTRACTOR MUST BE PREPARED TO SUPPLY A SAMPLE AND/OR PHOTOMETRIC DATA IF REQUIRED. IF SUBSTITUTION IS REJECTED, CONTRACTOR MUST BE PREPARED TO PROVIDE SPECIFIED PRODUCT WITHOUT DELAY.

DRAWING SHOWS CIRCUITING AND SWITCHING REQUIREMENTS AND FIXTURE TYPES ONLY. VERIFY EXACT LIGHTING FIXTURES AND STANDARD SWITCHING WITH ARCHITECT AND OWNER PRIOR TO INSTALLATION. ALSO VERIFY EXACT LIGHTING FIXTURES VOLTAGE AND FINISH PRIOR TO INSTALLATION.

PROVIDE AND INSTALL #10 WIRES FOR 120V CIRCUIT HOME RUNS MORE THAN 100'-0".

ANY FIXTURE SUBSTITUTION MUST BE APPROVED BY THE ARCHITECT AND/OR LIGHTING DESIGNER PRIOR TO BID. CONTRACTOR MUST BE PREPARED TO SUPPLY A SAMPLE AND/OR PHOTOMETRIC DATA IF REQUIRED. IF SUBSTITUTION IS REJECTED, CONTRACTOR MUST BE PREPARED TO PROVIDE SPECIFIED PRODUCT WITHOUT DELAY.

EXIT SIGNS LOCATIONS SHALL BE COORDINATED AND APPROVED BY FIRE MARSHALL.

PROVIDE ADDITIONAL EXIT SIGN PRE FIRE MARSHALL REQUEST. (TYPICAL ALL LIGHTING PLANS).

EMERGENCY LIGHTING CIRCUITS SHALL BE IN A SEPARATE RACEWAY FROM NORMAL LIGHTING CIRCUITS.

CONTRACTOR TO CONFIRM WINDOW HEAD HEIGHT AND SEPARATION OF PRIMARY AND SECONDARY DAYLIGHT ZONES.

CONTRACTOR SHALL PROVIDE AND INSTALL LIGHTING DEMAND AND RESPONSE SYSTEM PER CALIFORNIA ENERGY CODE 2022 SECTION 110.12(C). CONTRACTOR SHALL CONFIGURE THE LIGHTING SYSTEM TO ACHIEVE MINIMUM OF 15% BELOW THE TOTAL INSTALLED LIGHTING POWER.

ANY DEVICES CONTROLLER EMERGENCY CIRCUITS/FIXTURES TO HAVE UL 924 CERTIFICATION OR AHJ APPROVED EQUIVALENT.

SHEET NOTES

SCALE: NO SCALE

B1

WALL SWITCH/DIMMER SCHEDULE:

DAYLIGHT SENSOR SCHEDULE:

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

8