


SS32 THRU SS3200

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 3.0 Amperes

DO-214AB/SMC

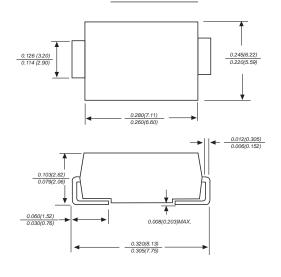

Dimensions in inches and (millimeters)

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750,

Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.007 ounce, 0.25 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.


MDD Catalog Number	SYMBOLS	SS32	SS33	SS34	SS35	SS36	SS38	SS310	SS3150	SS3200	UNITS
Maximum repetitive peak reverse voltage	VRRM	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	VRMS	14	21	28	35	42	56	70	105	150	VOLTS
Maximum DC blocking voltage	VDC	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at TL(see fig.1)	l(AV)	3.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	İfsm	100.0								Amps	
Maximum instantaneous forward voltage at 3.0A	VF	0.55			0.	70	0.85			0.95	Volts
Maximum DC reverse current Ta=25℃ at rated DC blocking voltage Ta=100℃	lR	0.5 0.2 20 10 2.0							mA		
Typical junction capacitance (NOTE 1)	C¹	500					300				pF
Typical thermal resistance (NOTE 2)	RθJA	55.0								°C/W	
Operating junction temperature range	TJ,	-50 to +125						-50 to +150			°C
Storage temperature range	Тѕтс	-50 to +150								°C	


Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas





RATINGS AND CHARACTERISTIC CURVES SS32 THRU SS3200

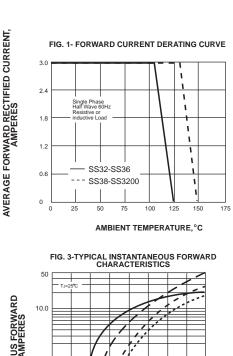










VOLTS

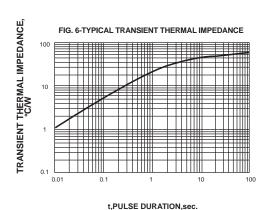

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

