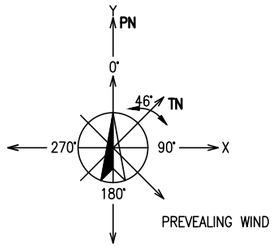

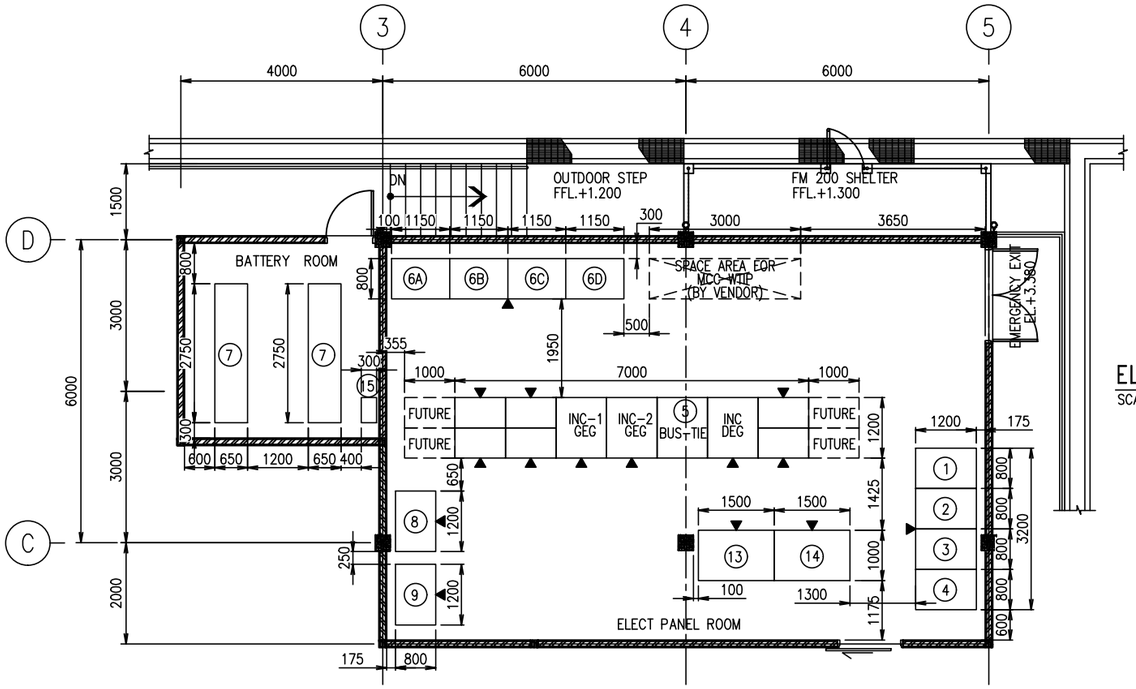

ELECTRICAL ROOM & BATTERY ROOM

SCALE 1:100

KEYPLAN

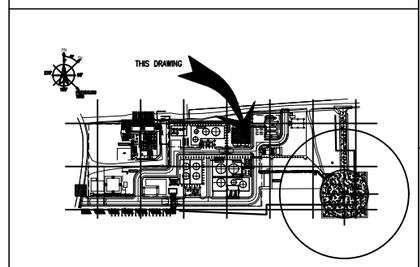

SYMBOL	DESCRIPTION
▣	FRONT OF PANEL / CABINET
⬚	FUTURE SPACE
FFL	FINISH FLOOR LEVEL

EQUIPMENT LIST

NO	EQUIPMENT NO.	DESCRIPTION	Q'TY	UNIT	DIMENSION [mm] W	D	H	WEIGHT [Kg]	MOUNTING TYPE	REMARKS
1	GCP-001	GENERATOR CONTROL PANEL FOR GEG 01 / 0,4kV, 50Hz, 0,8 PF	1	SET	800	1200	2000	1500	FREE STANDING	
2	GCP-002	GENERATOR CONTROL PANEL FOR GEG 02 / 0,4kV, 50Hz, 0,8 PF	1	SET	800	1200	2000	1500	FREE STANDING	
3	GCP-003	GENERATOR CONTROL PANEL FOR DEG 01 / 0,4kV, 50Hz, 0,8 PF	1	SET	800	1200	2000	1500	FREE STANDING	
4	MGCP-001	MASTER GENERATOR CONTROL PANEL / 0,4kV, 50Hz, 0,8 PF	1	SET	800	1200	2000	1500	FREE STANDING	
5	SWG/MCC-001A	LV SWITCHGEAR 400V, 3Ph, 3W, 50Hz, 800A, 25kA, 1Sec INC. 3 CUBICLE, OUT. 6 CUBICLE, TIE 1 CUBICLE	1	SET	7000	1200	2200	2500	FREE STANDING	
6A	UPS BYPASS	AC UPS 230VAC 30kVA WITH DISTRIBUTION PANEL	1	SET	1150	800	1800	2000	FREE STANDING	
6B	UPS FEDDER A	AC UPS 230VAC 30kVA WITH DISTRIBUTION PANEL	1	SET	1150	800				
6C	UPS FEDDER B	AC UPS 230VAC 30kVA WITH DISTRIBUTION PANEL	1	SET	1150	800				
6D	UPS PDB	AC UPS 230VAC 30kVA WITH DISTRIBUTION PANEL	1	SET	1150	800				
7	BATT-001	BATTERY BANK 230VAC, UPDATE FROM UPS SIZING	2	SET	2750	650	1400	2300	FREE STANDING	
8	NLP-001	NORMAL LIGHTING PANEL 15kVA, 400V, 3Ph, 4W	1	SET	1200	800	1100	200	FREE STANDING	
9	ELP-001	EMERGENCY LIGHTING PANEL 50kVA, 400V, 3Ph, 4W	1	SET	1200	800	1100	200	FREE STANDING	
10										
11										
12										
13	SS-P-005A	PANEL SOFT STARTER FOR GROSS TRANSFER PUMP 90kW, 400V, 25kA	1	SET	1500	1000	2300	300	FREE STANDING	
14	SS-P-005B	PANEL SOFT STARTER FOR GROSS TRANSFER PUMP 90kW, 400V, 25kA	1	SET	1500	1000	2300	300	FREE STANDING	
15		BATTERY BREAKER BOX, EXD, IIC, T3	2	SET	–	–	–	–	WALL MOUNTING STANDING	

NOTES :

1. ALL DIMENSION ARE IN MILLIMETER UNLESS OTHERWISE NOTED.
2. ALL EQUIPMENT DIMENSIONS AND ARRAGEMENT ARE PRELIMENARY DESIGN ONLY IT IS TO BE CONFIRMED AND AS PER SELECTED VENDOR DATA DURING DETAIL DESIGN STAGE.
3. EQUIPMENT CABLE ENTRY IS GENERALLY FROM BOTTOM.
4. ELECTRICAL EQUIPMENT SUCH AS AC SPLIT + BLOWER, EXHAUST FAN, AND RECEPTACLES ARE NOT SHOWN IN THIS DRAWING AND SHALL REFER TO DWG. NO. TMBP-SP001-EL-LAY-D109 D010
5. INSTRUMENT & TELECOM EQUIPMENT SHALL REFER TO DWG. NO.TMBP-SP001-IN-LAY-D104~D107 GENERALLY FROM BOTTOM.

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D
TMBP-SP001-CS-ARC-D102	ARC-HITECTURAL PLAN AND SECTION FOR CONTROL ROOM AND SUB-						
TMBP-SP001-EL-LST-D101	ELECTRICAL EQUIPMENT LIST						
TMBP-SP001-EL-CAL-D101	ELECTRICAL DEMAND LOAD ANALYSIS AND MAIN EQUIPMENT SIZING	A	14-01-2026	ISSUED FOR RIVIEW	FN	AS	MR

PT. PERTAMINA EP APPROVAL

CHECKED | APPROVED

PROCET :

JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER : skkmigas PERTAMINA EP

CONTRACTOR : POG

SCALE :	DRAWING NO.	SHEET. NO.	REV
NTS	TMBP – SP001 – EL – LAY – D101	01 OF 01	A

DRAWING TITLE :

ELECTRICAL EQUIPMENT LAYOUT