tinyPLC A0 / BASE / TOP AND SIDE VIEWS

ENGINEERING DRAFT - mm - scale 1:1 at actual-size A4 printing - NOT A PCB FABRICATION RELEASE

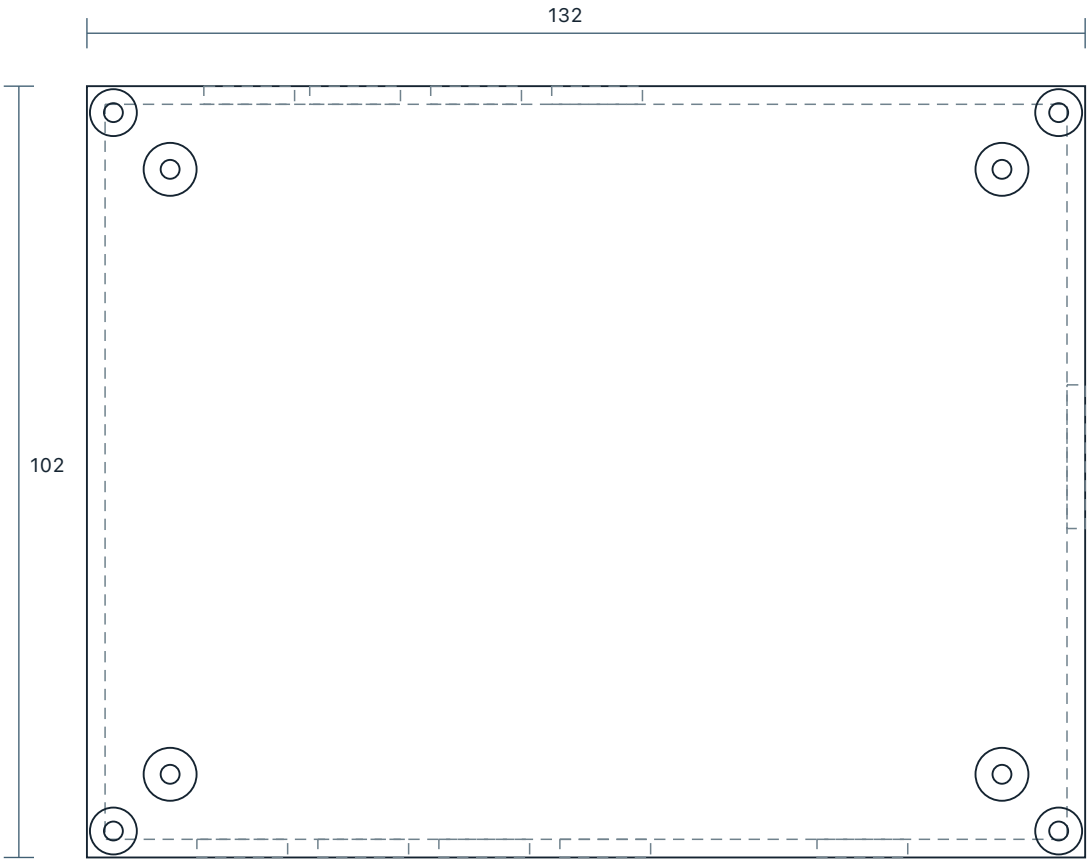

TOP: XY datum = outside corner at left/top; Z datum = outside floor

SIDE / SECTION HEIGHTS

Floor: 2.4; walls: 2.4

PCB underside Z=8; top Z=9.6

PCB support: OD 7; pilot 2.5

Support centers: (11,11), (121,11),

(11,91), (121,91)

Lid towers: OD 6.2; pilot 2.5

Terminal windows: 12 W x 16 H

Window bottom Z=9; top Z=25

USB: 19 W x 10 H; bottom Z=7

USB Y span: 39.5 to 58.5

Pilot sizes require printer coupon.

CUTOUTS: 4 DI windows on Y=0 edge; 4 Q + power windows on Y=102 edge

See component placement/template for terminal centers. M3 pilots are tapped, not heat-set-insert sockets.

Check the scale bar. Print at 100%; disable fit-to-page. Native FreeCAD and parameters govern geometry.