tinyPLC A0 / LID AND DISPLAY BLANK

ENGINEERING DRAFT - mm - scale 1:1 at actual-size A4 printing - NOT A PCB FABRICATION RELEASE

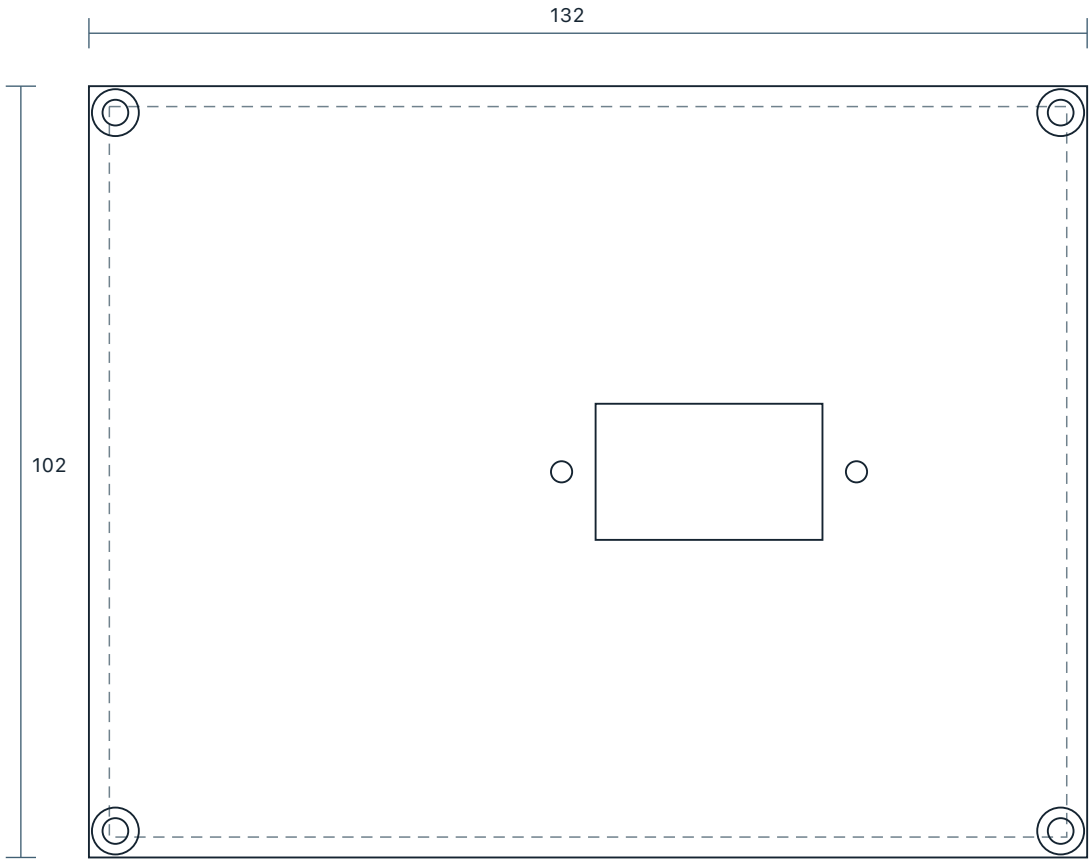

TOP VIEW. Window center: X=82, Y=51. Window: 30 x 18.

DISPLAY BLANK

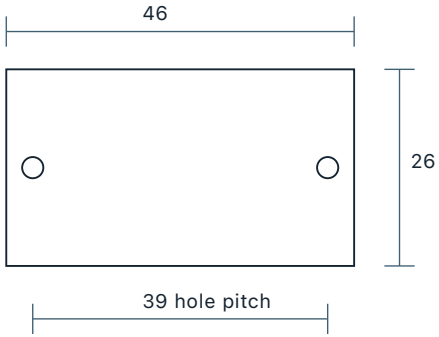

Lid plate: 2.4 thick

Locating lip: 1.8 below lid

Lip outer: 126.6 x 96.6

Lip wall: 1.6 nominal

Lip clearance: 0.3 per side

4 holes: dia 3.4 through

Counterbores: dia 6.2 x 1 deep

Blank: 2 thick, 2 holes dia 2.8

2 lid/blank holes: dia 2.8

Blank fasteners: M2.5 x 8 + nuts

Lid screw centers: (3.5,3.5), (128.5,3.5), (3.5,98.5), (128.5,98.5). M3 x 8 candidate screws.

Display blank is a cover; no OLED bracket is defined. Lip has local tower clearances; inspect STEP/FreeCAD.

Check the scale bar. Print at 100%; disable fit-to-page. Native FreeCAD and parameters govern geometry.