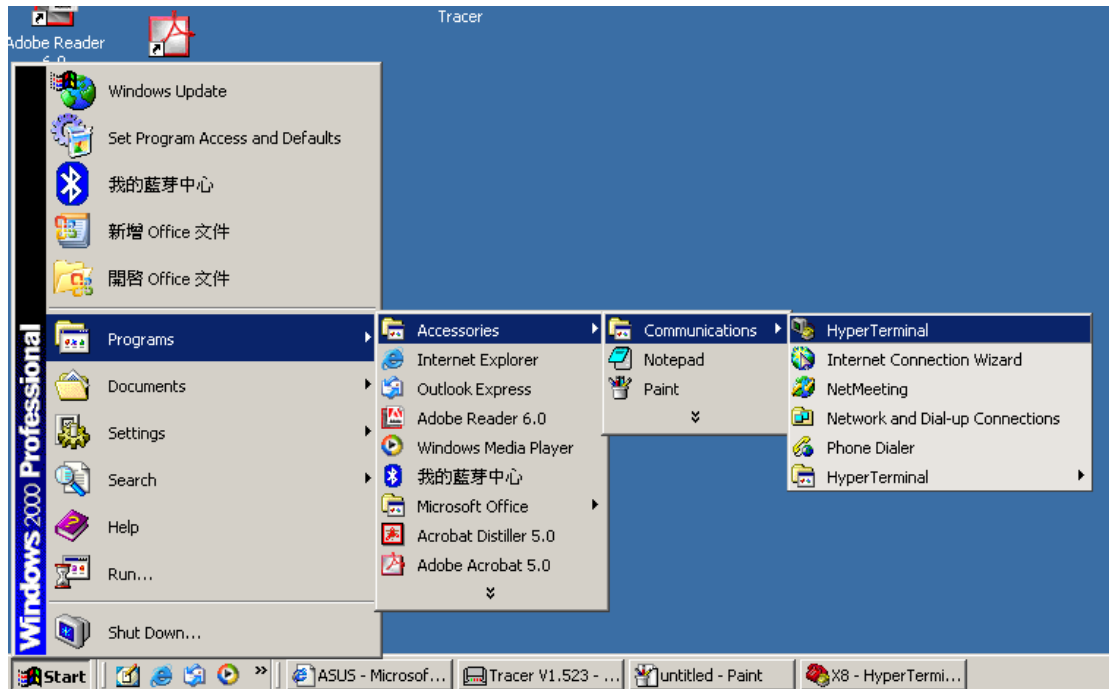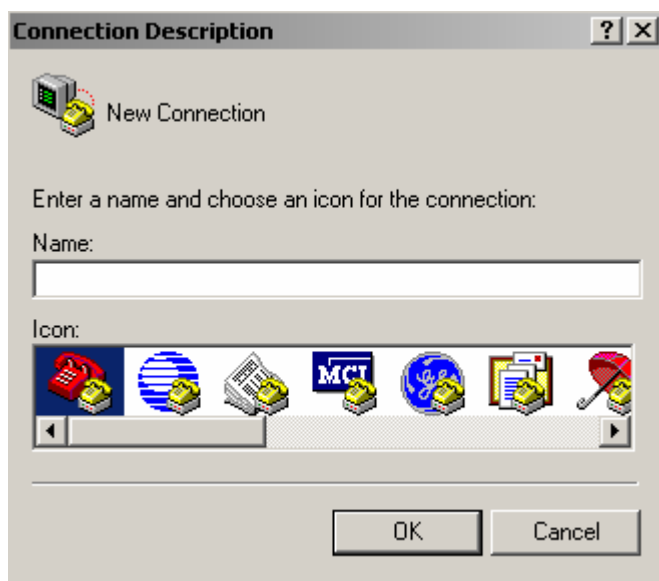# Hyper Terminal Setup Manual

Step 1:

Please click "Start" -> "Programs" -> "Accessories" -> "Communications" -> "Hyper Terminal", please refer to the following figure (based on the Windows 2000 Professional Operating System):
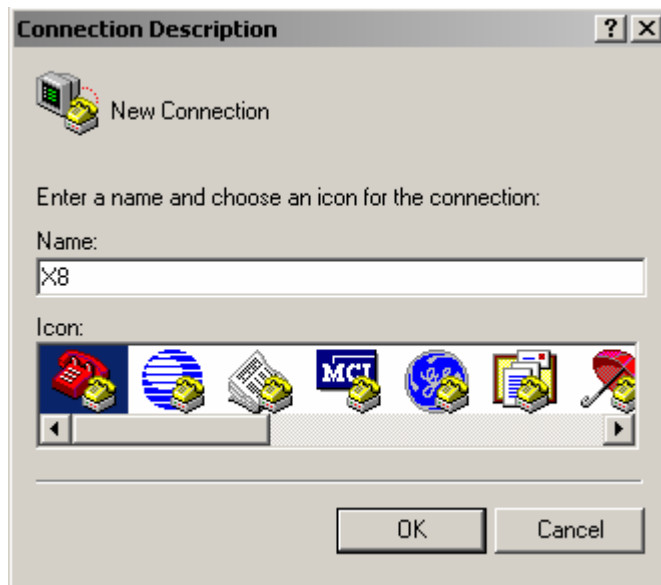

The following figure appears:

Step 2:

Please give any name to it such as "X8" in the following example, then click [OK]:

Step 3:

Please select the appropriate COM port number which connects to the X8 by RS232 cable then click [OK]. Please refer to the following figure:

Step 4:

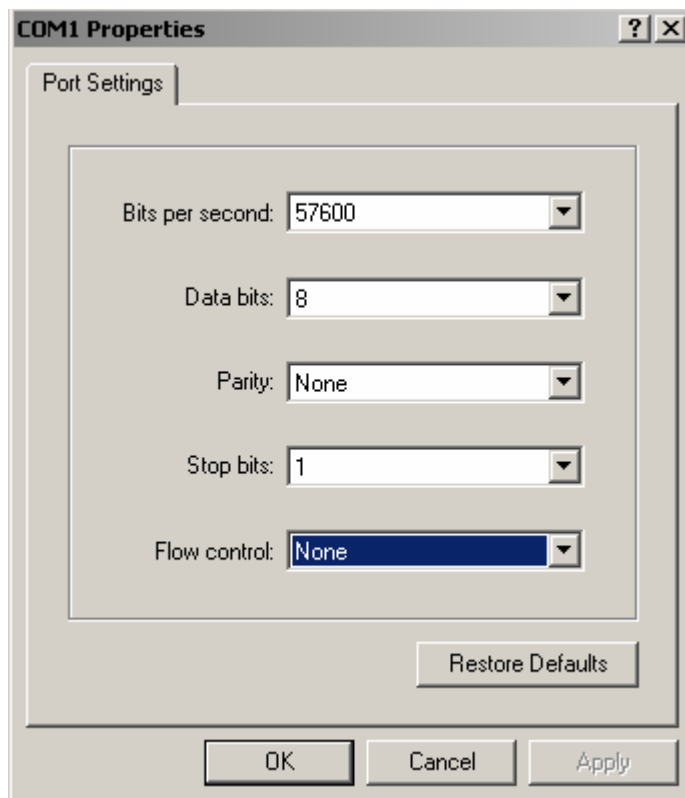Please setup the parameters as the following:

Bits per second: 57600bps (default setting of X8 RS232 connector)

Data bits: 8

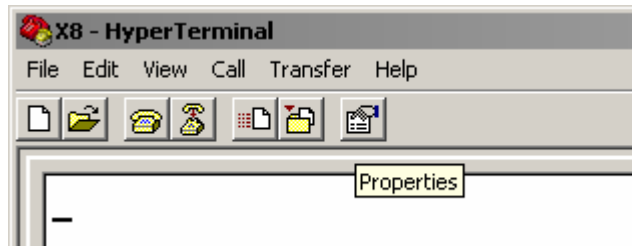Parity: None

Stop bits: 1

Flow control: None

Then click [OK] button, it will bring the screen back to the main screen of Hyper
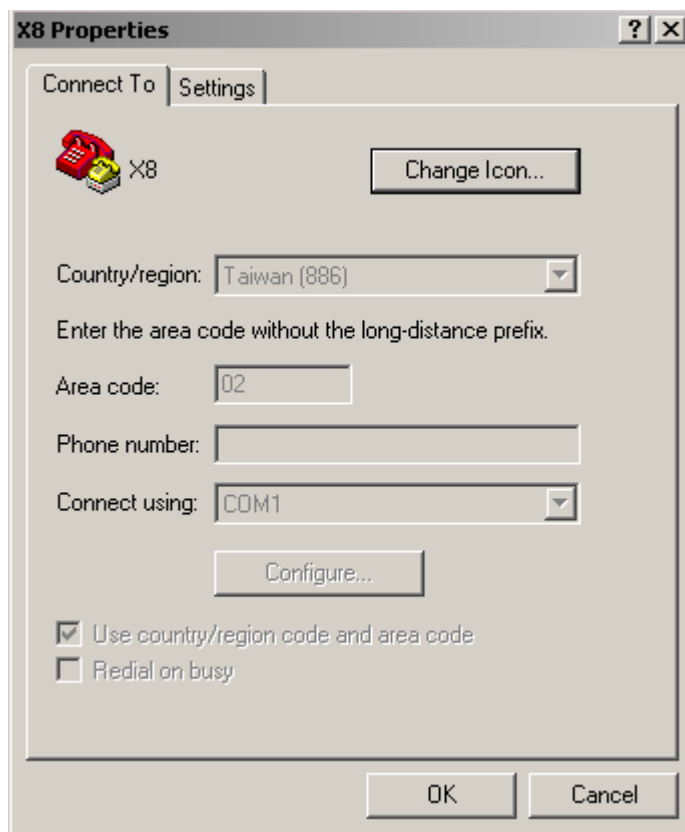
Terminal as following figure, the connection status will be
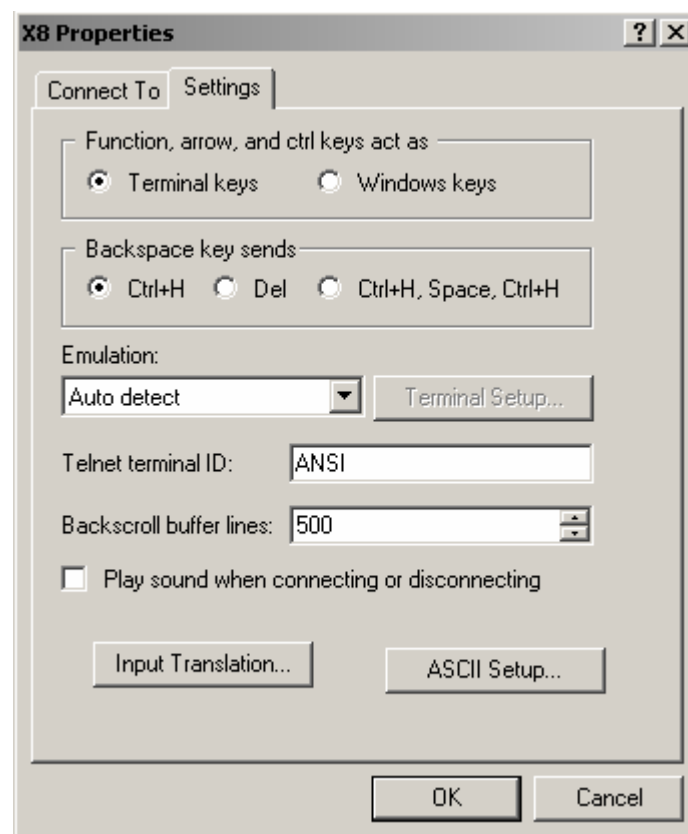
displayed on the lower-left corner

Step 5:

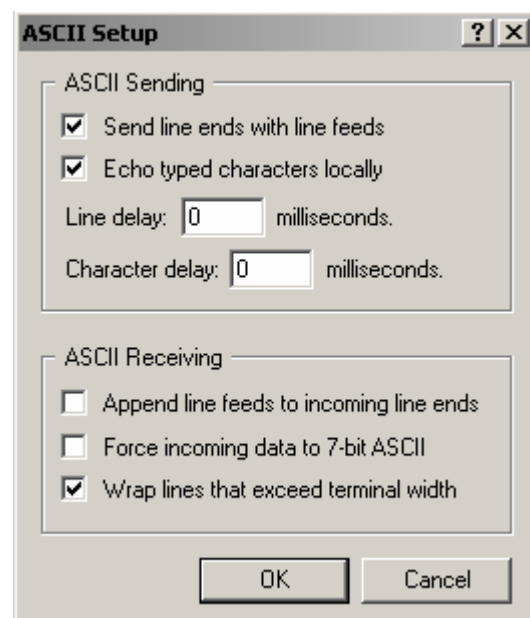Please click the "Properties" on the toolbar menu.

The following dialog appears:

Please click "Settings" tab, the following dialog appears:

Please click the [ASCII Setup] then the following dialog appears:

Please check the check box of "Send line ends with line feeds" and "Echo typed characters locally" then click [OK]. It brings the screen back to the main screen.

Step 6:

Please type the "$ST" then press [Enter], if the communication has established correctly, the unit should return the message "ERR:UNKNOWN COMMAND".