



Home on Your Smartphone

Application User Manual


Table of Contents

1. Sign Up in ezyKam+ application.....	1
2. Sign-in in ezyKam+ application.	3
3. Reset Password of your ezyKam+ account.	4
4. Login ezyKam+ account with OTP.	6
5. Add a Wi-Fi Camera in ezyKam+ Mobile App.	8
6. Add a 4G Camera in ezyKam+ Mobile app	13
7. ezyKam+ Live page options and their “Usages”	17
8. ezyKam+ Live page sub-options and their “Usages”	18
9. ezyKam+ Features Panel.....	19
10. Basic Function Settings.....	22
11. Night Vision Settings	23
12. Detection Alarm Settings	24
13. Recording Settings.....	25
14. Check Playback and download Recordings.	26
15. Check Cloud Playback download Recording.....	27
16. Check and Share Downloaded Files.....	28
17. Enable ONVIF and Set Password.....	29
20. Create Schedule in ezyKam+.	32
21. Create Site in ezyKam+.	33
22. Restart and Remove a camera in ezyKam+.	34
23. Link your ezyKam+ account to Alexa Echo Show and Google Home Nest:	34


1. Sign Up in ezyKam+ application.

If you're a new user of the “ezyKam+” application, you must follow below steps:


1. Open the **ezyKam+** Mobile app.
2. On the welcome screen, tap “**Sign Up**”.

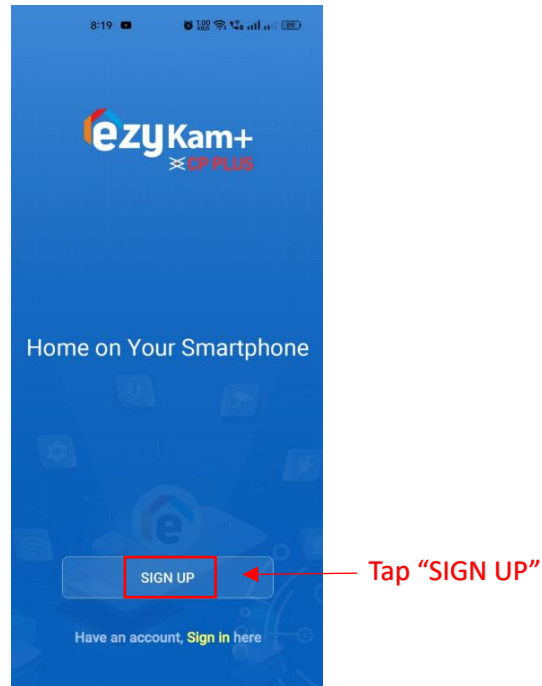

3. Select your “**Country Region**” and enter your “**Email**”. We recommend you go through the “**Privacy Policy**” and “**User Agreement**”. If you agree with the terms, then select “**I Agree Privacy Policy and User Agreement**” then tap “**Get Verification Code**”.

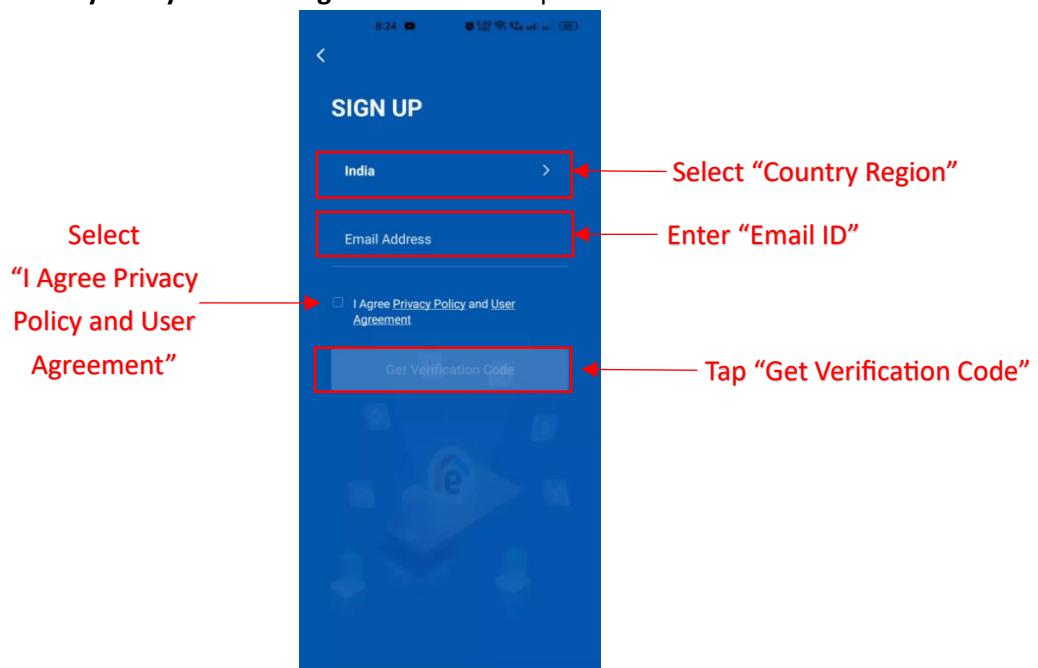

4. Enter the **"Verification Code"** that you received on your **"Email ID"** and set a **"Password"** for the application and Tap **"Done"**. You will get Logged In and referred to the **"Device List"**.

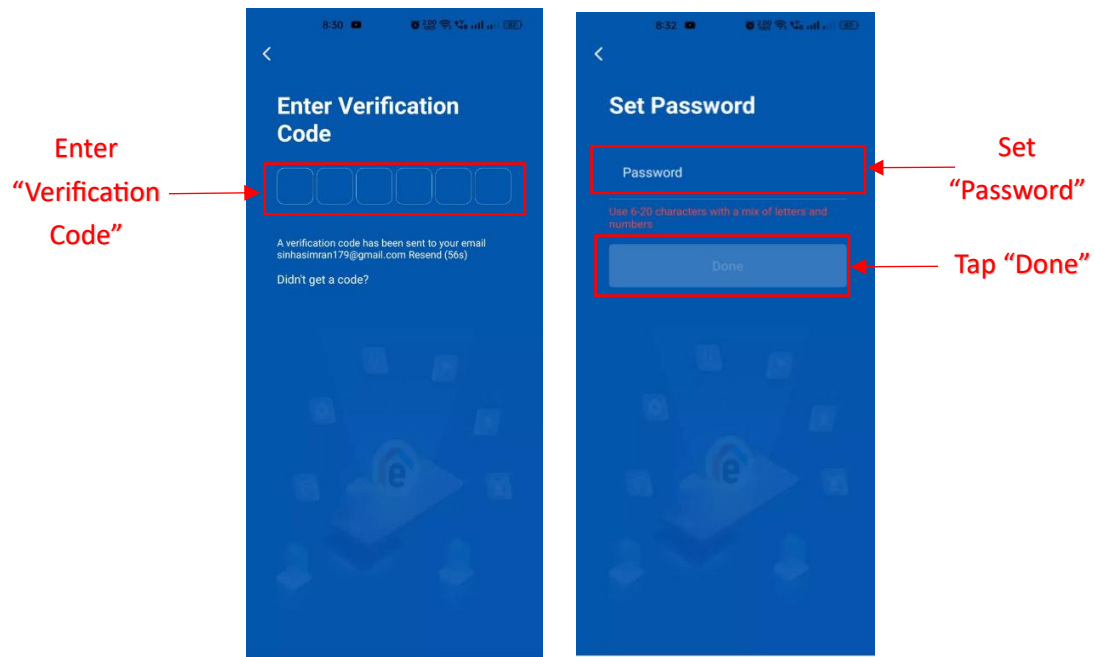


"Congratulations, you have successfully Sign-up an account in ezyKam+. Now you can add your camera and enjoy the services."


2. Sign-in in ezyKam+ application.

If you're already a user of **ezyKam+**, you must follow below steps: -

1. Kindly open the **ezyKam+** mobile application and tap on “**Sign-in**”

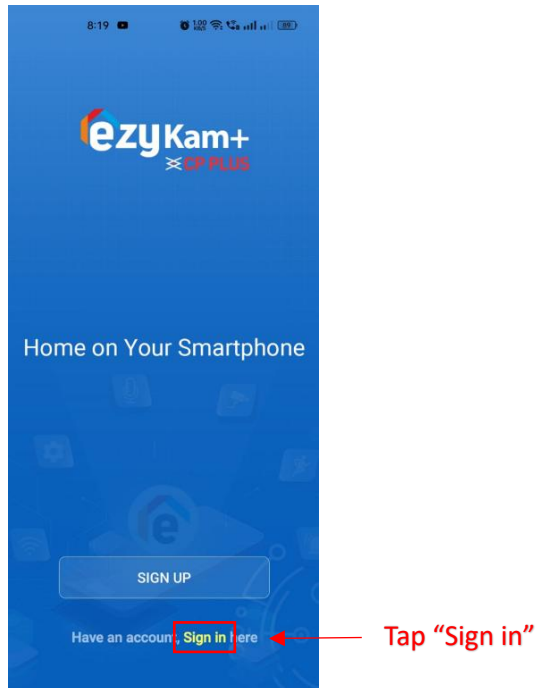


2. Enter your login credentials, **Email ID** and **password**, we recommend you go through the “**Privacy Policy**” and “**User Agreement**”. If you agree with the terms, then select “**I Agree Privacy Policy and User Agreement**” and tap to “**Log in**”.

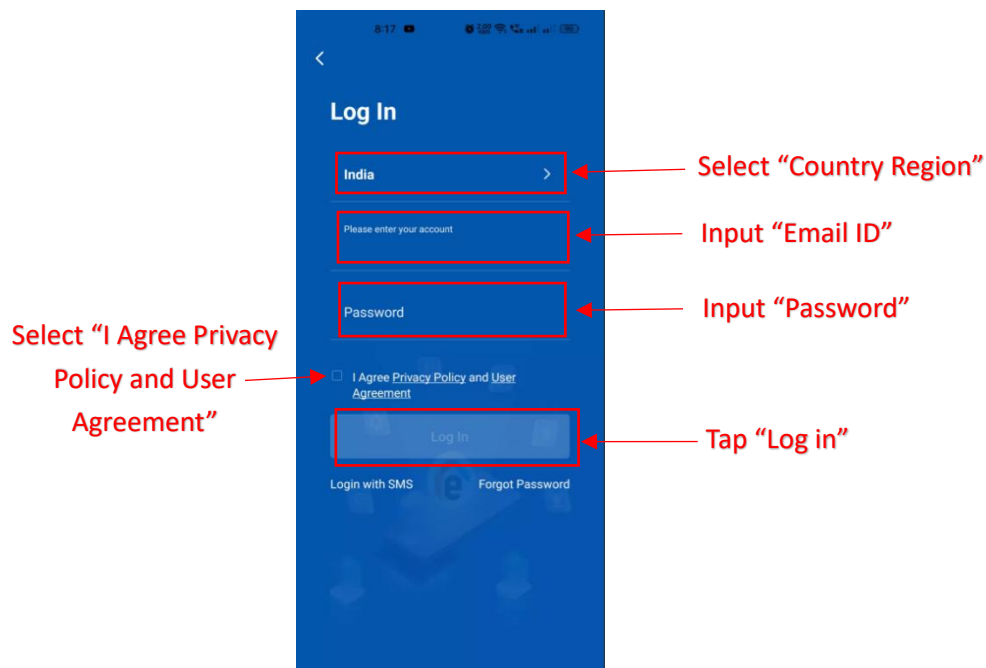


3. Reset Password of your ezyKam+ account.

If you've forgotten the password of your **ezyKam+** account,


1. Open the **ezyKam+** Mobile Application.
2. Tap on “Sign-in” Button.

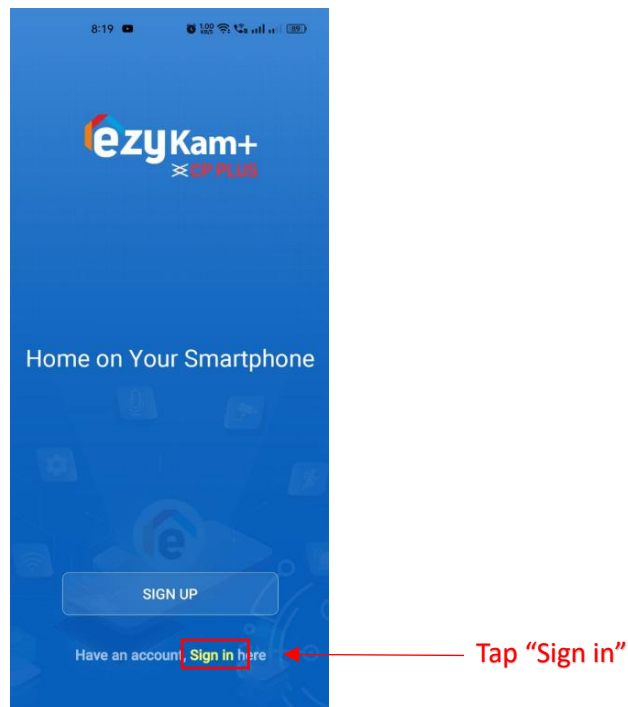


3. Tap “Forgot Password” Option.

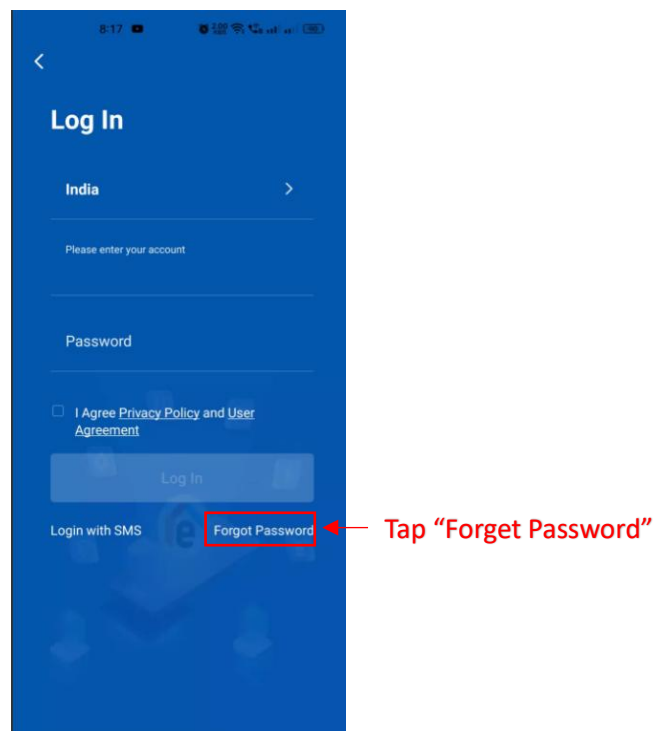

4. Select your ezyKam+ account “**Country Region**” and enter your ezyKam+ account “**Email ID**”.

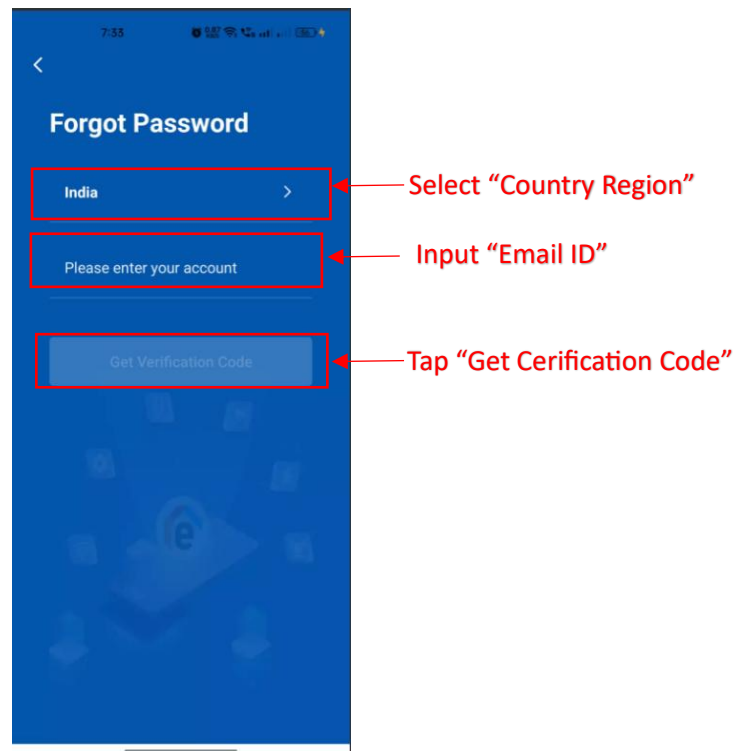


5. Enter the “**Verification Code**” and “**Set a password**” for your ezyKam+ account and Tap “**Done**”.

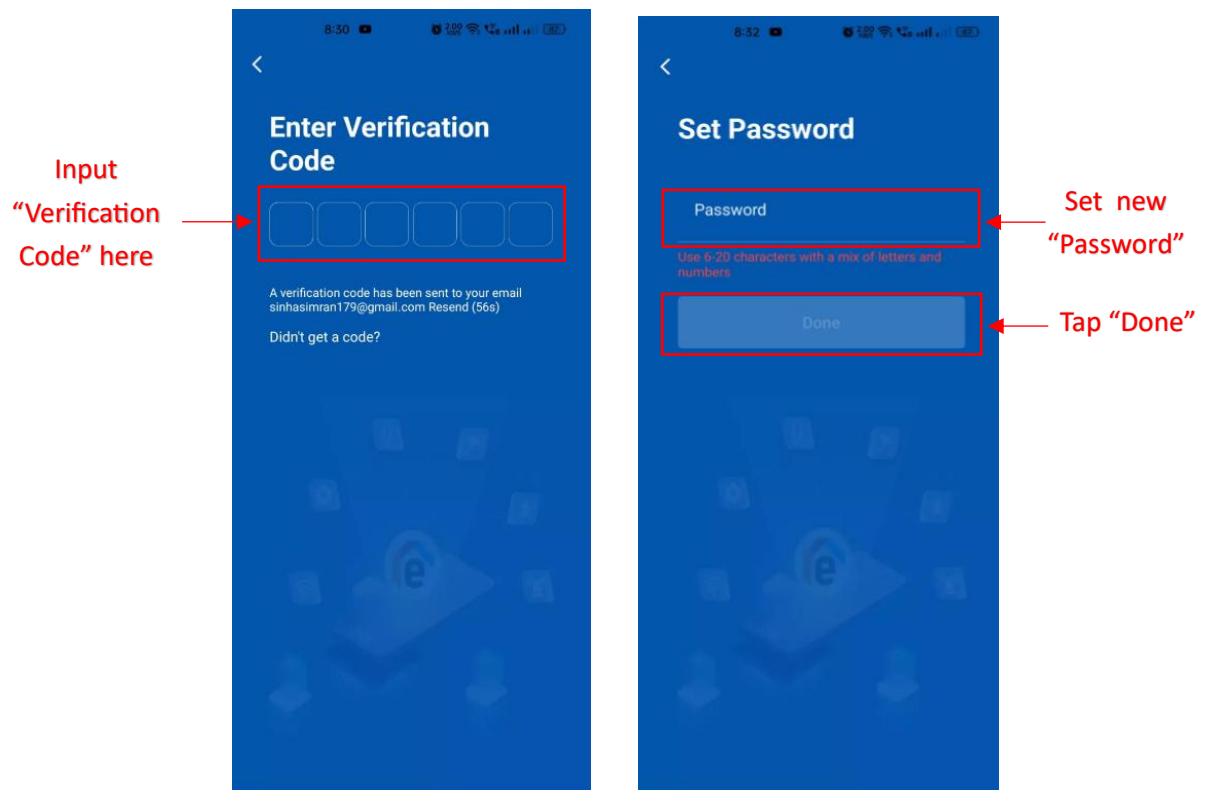


4. Login ezyKam+ account with OTP.


1. Open the **ezyKam+** Mobile Application.
2. Tap **“Sign-in”**.

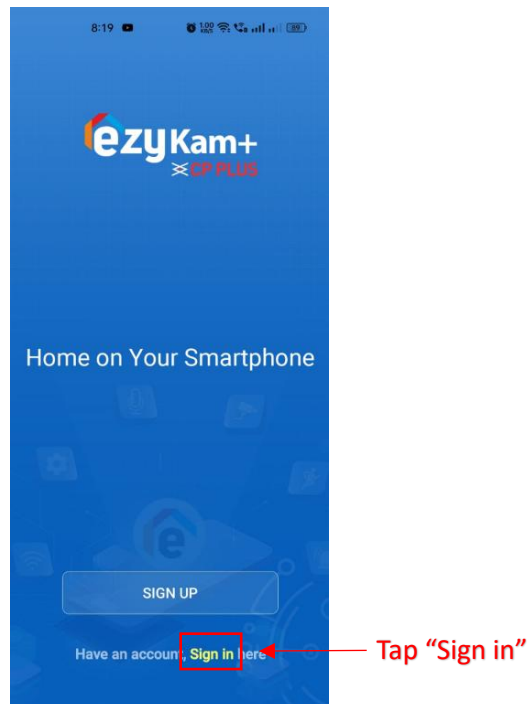

3. Tap **“Login with SMS”**.

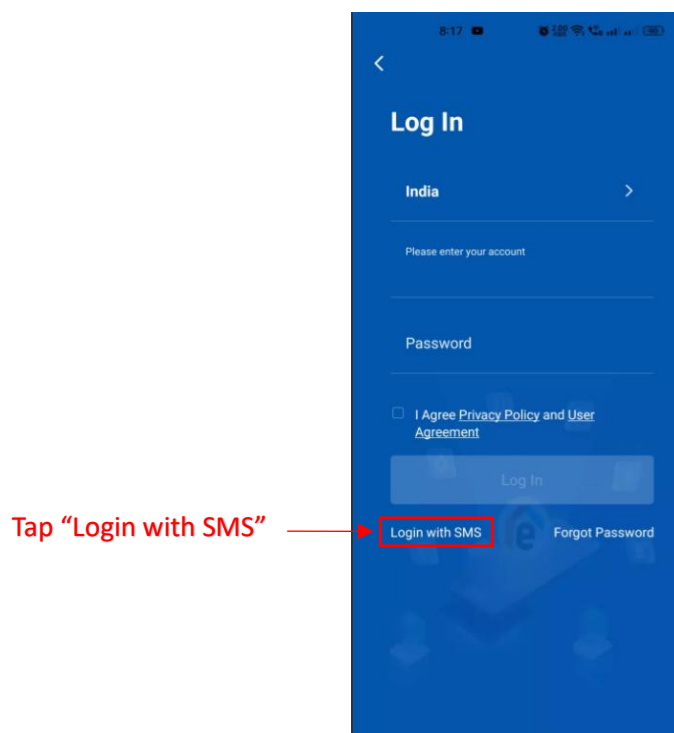

4. Select your account “**Country Region**” and enter your registered “**Email ID**” of the ezyKam+ account and Tap “**Get Verification Code**”.

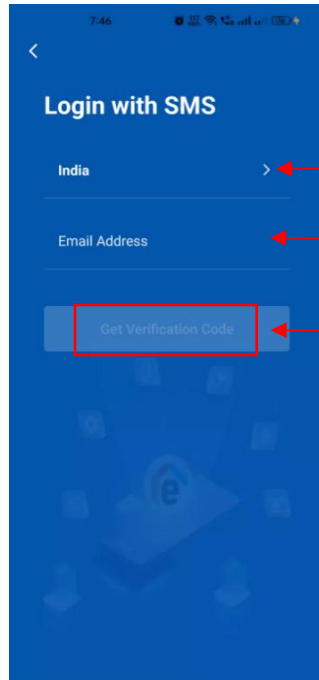


Select “Country Region”

Enter “Email ID”

Tap “Get Verification Code”

5. Enter the “**Verification Code**” and you will get logged in to your ezyKam+ account successfully.

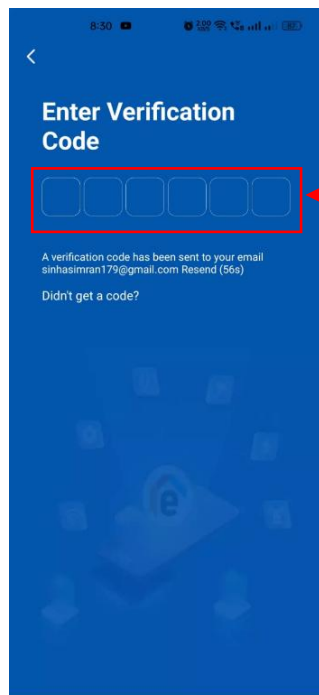

Input “Verification Code”

A verification code has been sent to your email sinhasimran179@gmail.com Resend (56s)

Didn't get a code?


5. Add a Wi-Fi Camera in ezyKam+ Mobile App.

1. Connect the camera with the power cable provided in the packaging and please make sure your Mobile phone is connected to the **2.4GHz Wi-Fi network** to which you want to connect the camera.
2. Once it get powered on properly, **"Press and Hold"** the reset button for **"5-10 seconds"**. The Camera will prompt "Reset Success, camera is rebooting Now".




Note: The attached image is just for reference. The position of reset button may vary as per the Camera Model.


3. Ensure that you have provided all the **required permissions** for ezyKam+ Mobile app (**Including Location and Bluetooth**).
4. Ensure that the **status indicator is blinking slowly**, then open the ezyKam+ Mobile app and tap on **"+"** Icon to add a camera.

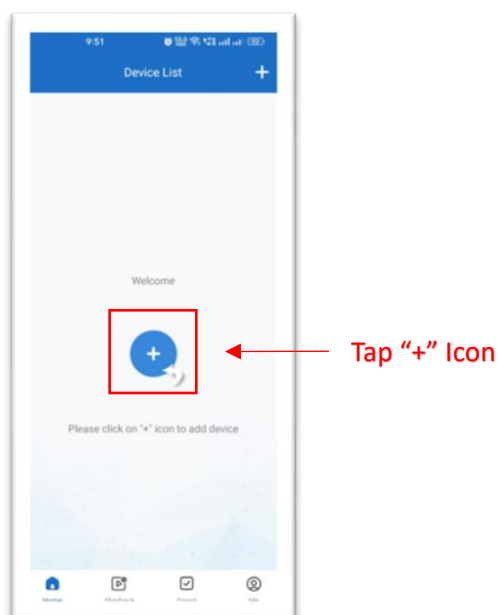


5. Select your “Camera model” from the device list.

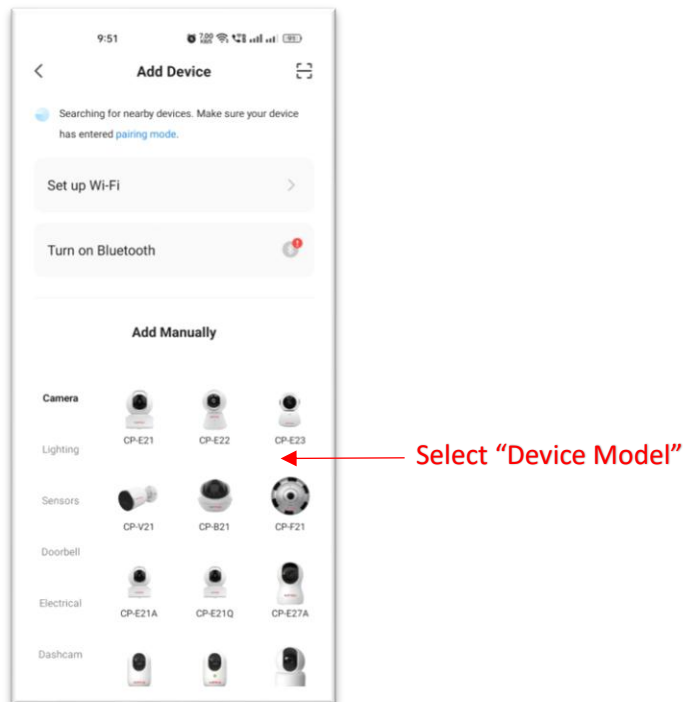

6. Select the “Next Step” option and Tap “Next”.

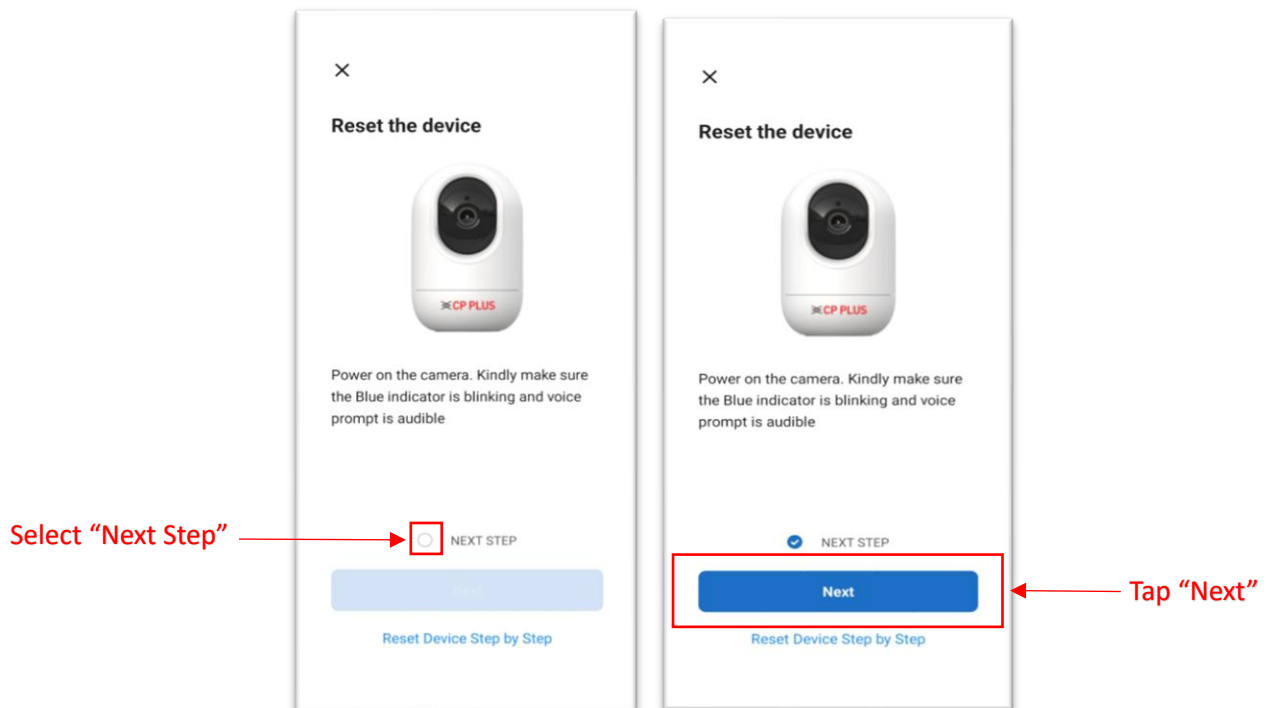


7. Enter the “Wi-Fi SSID and Password” and Tap “Next”.

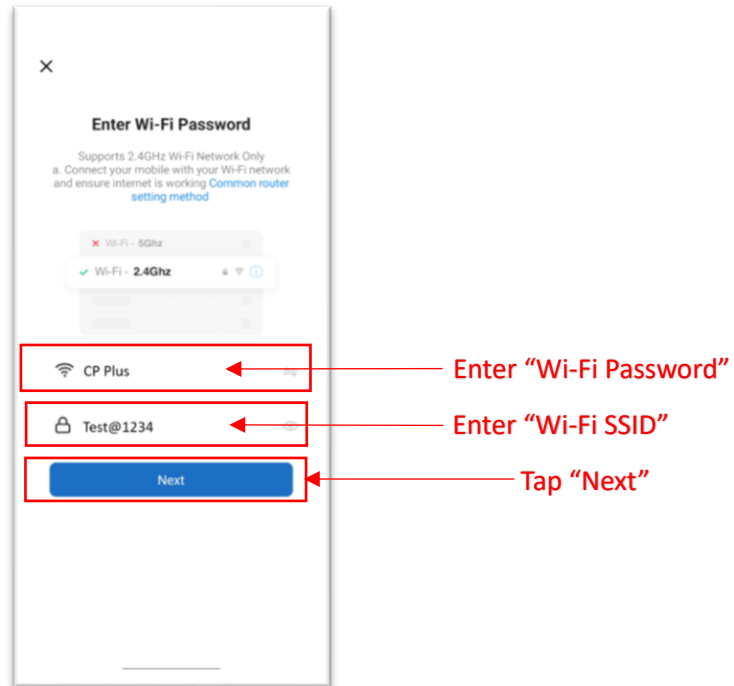


8. “QR Code” will be generated on your mobile screen, now you need to **show this QR Code** to the camera (**keep 15-20cm space between camera and mobile phone**). Ensure that the camera is placed on a **stable surface** like table or desk and the lens of the camera is clean.




9. After a Successful scan, the camera will provide voice prompt, “**Wi-Fi Connecting, please wait.**” and the “**Status Indicator**” starts blinking quickly. Tap “**I Heard a Prompt**”.

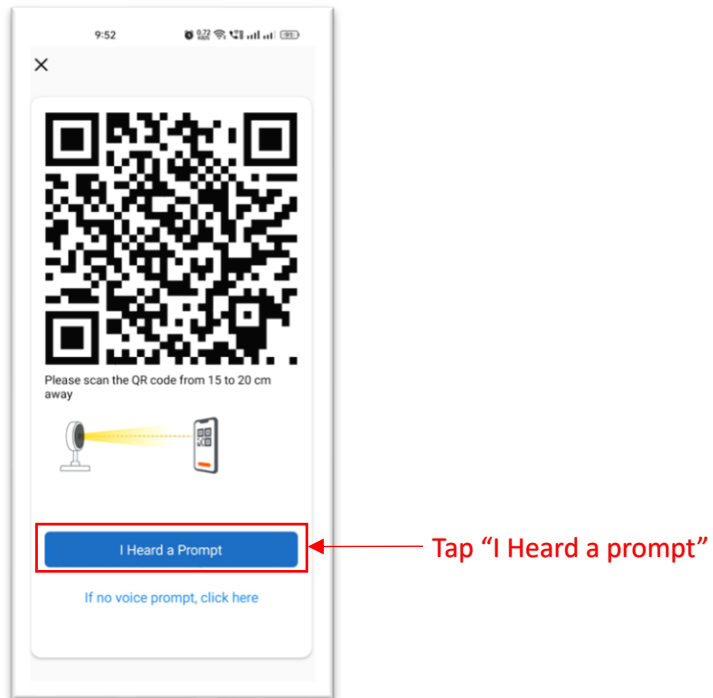

10. “**Two Minutes timer**” will start in the Mobile app. Once the camera gets connected with Wi-Fi, the camera will prompt “**Wi-Fi connection Success**” and the “**Status indicator**” will get stable.

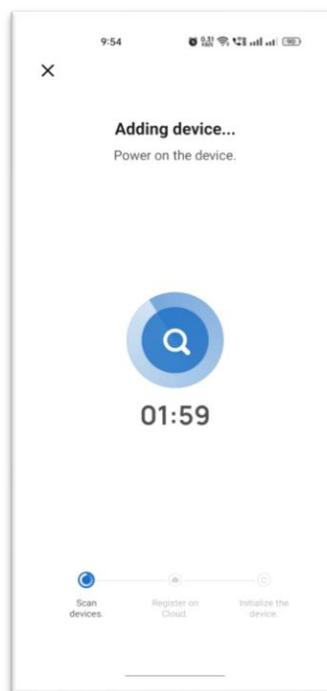

11. The Device will get added in the ezyKam+ Mobile app and the camera will prompt “**Device added successfully**”. Tap “**Done**” and now you can enjoy the smart and secure services of ezyKam+.

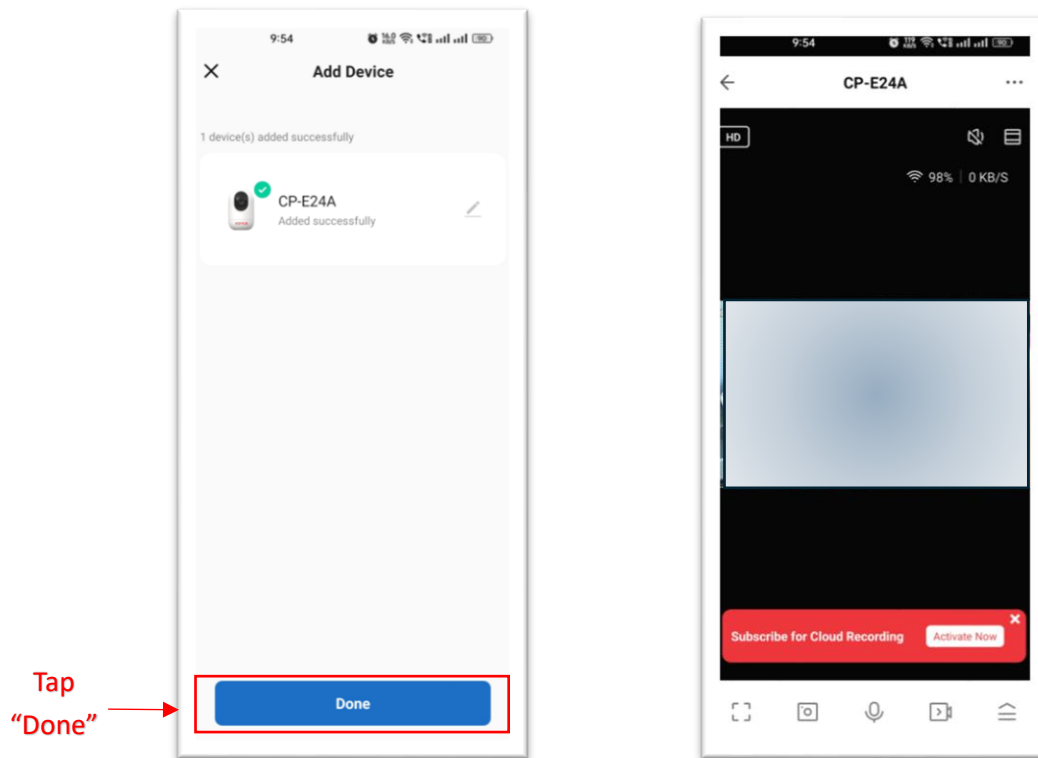


6. Add a 4G Camera in ezyKam+ Mobile app

1. Connect the camera with the power cable provided in the packaging and please make sure the **SIM Card is being inserted properly** and have an **active internet** data plan.
2. Press and hold the **“Reset Pinhole button”** of the camera for 10-15 Seconds, the camera will prompt **“Reset Success”**.




Note: The attached image is just for reference. The position of reset button may vary as per the Camera Model.

3. Kindly wait till the camera reboots, once you will get the voice prompt **“4G Network connection succeeded”**.
4. Open the ezyKam+ Mobile app and Tap **“+”** Icon to add a camera.

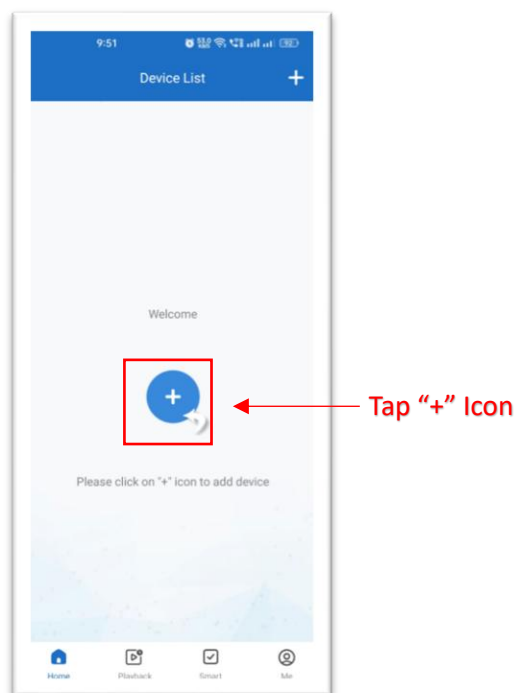


5. Select your **Camera model** from the device list.

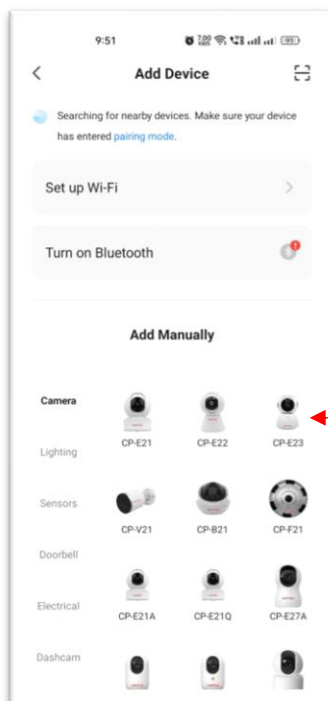


Select "Device Model"

6. Tap "Scan Now".

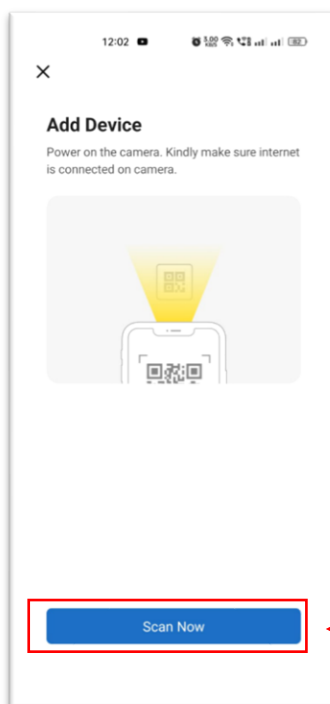


Tap "Scan Now"

7. QR Code scanner will get opened in your Mobile app. Now you need to Scan the “**Device QR Code**” of the camera. (you will get the “**Device QR Code**” on the label pasted on the camera).

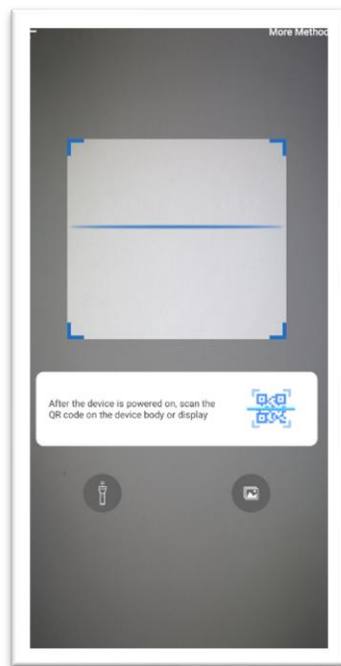


Scan
"QR Code"


8. After a successful scan, **“Two Minutes”** timer will start.

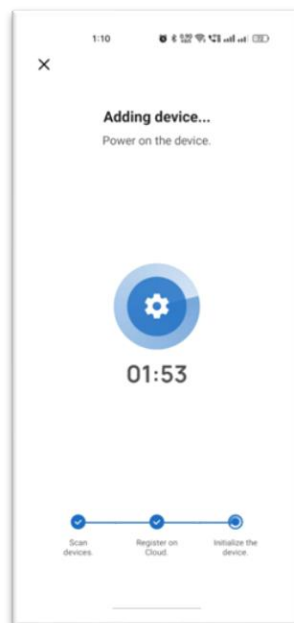


9. Once the camera will get **"Added successfully"** then it will prompt **"Device added successfully"**.

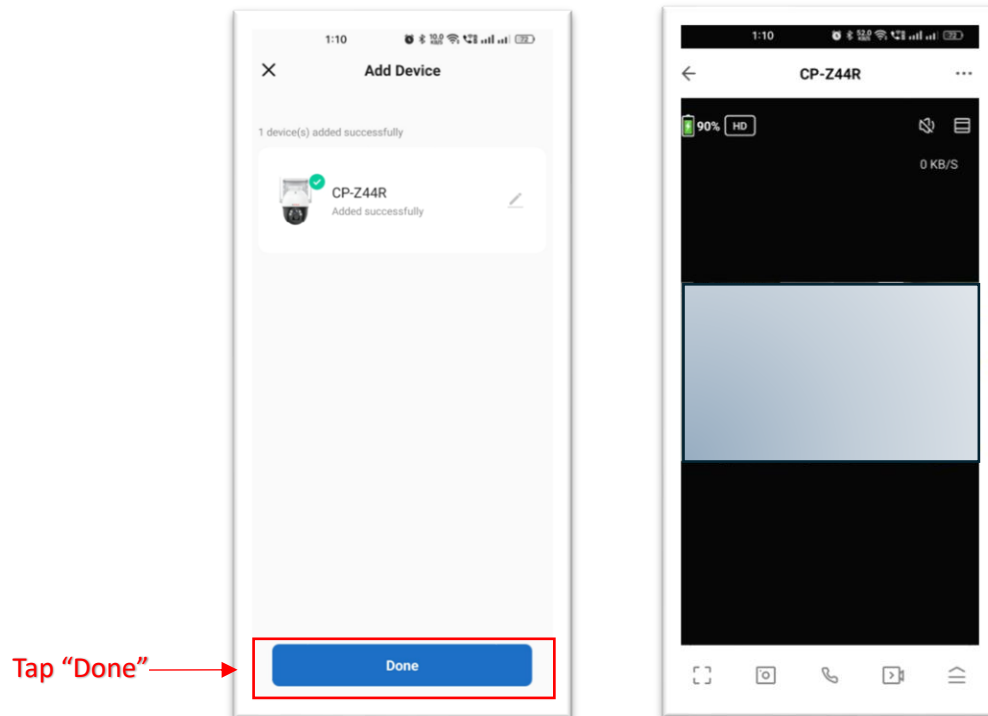


7. ezyKam+ Live page options and their “Usages”

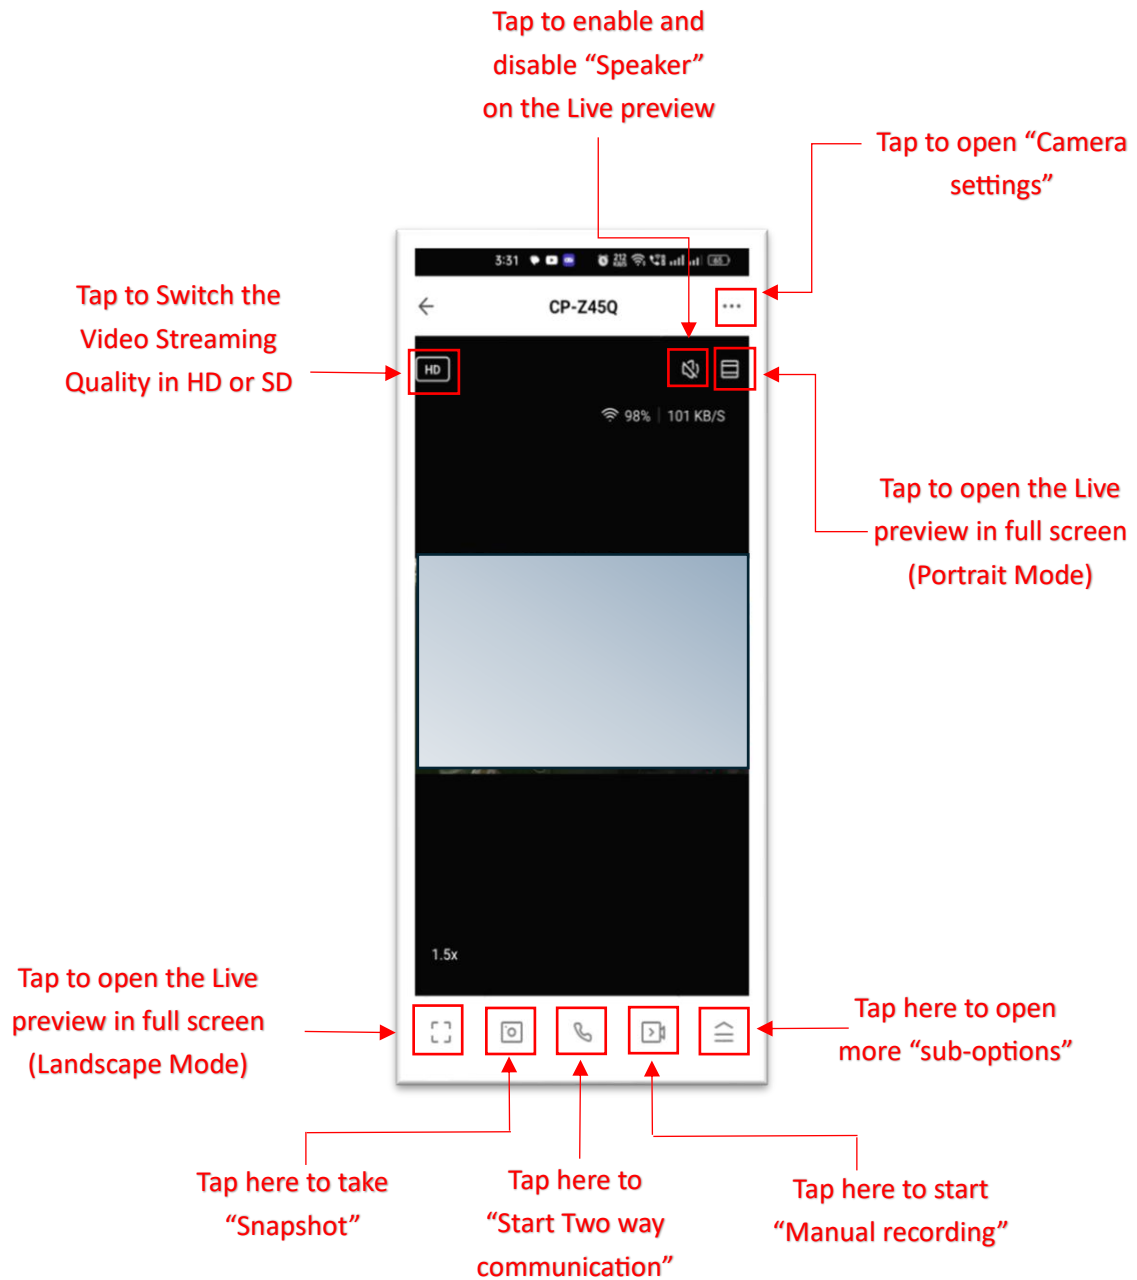

8. ezyKam+ Live page sub-options and their “Usages”

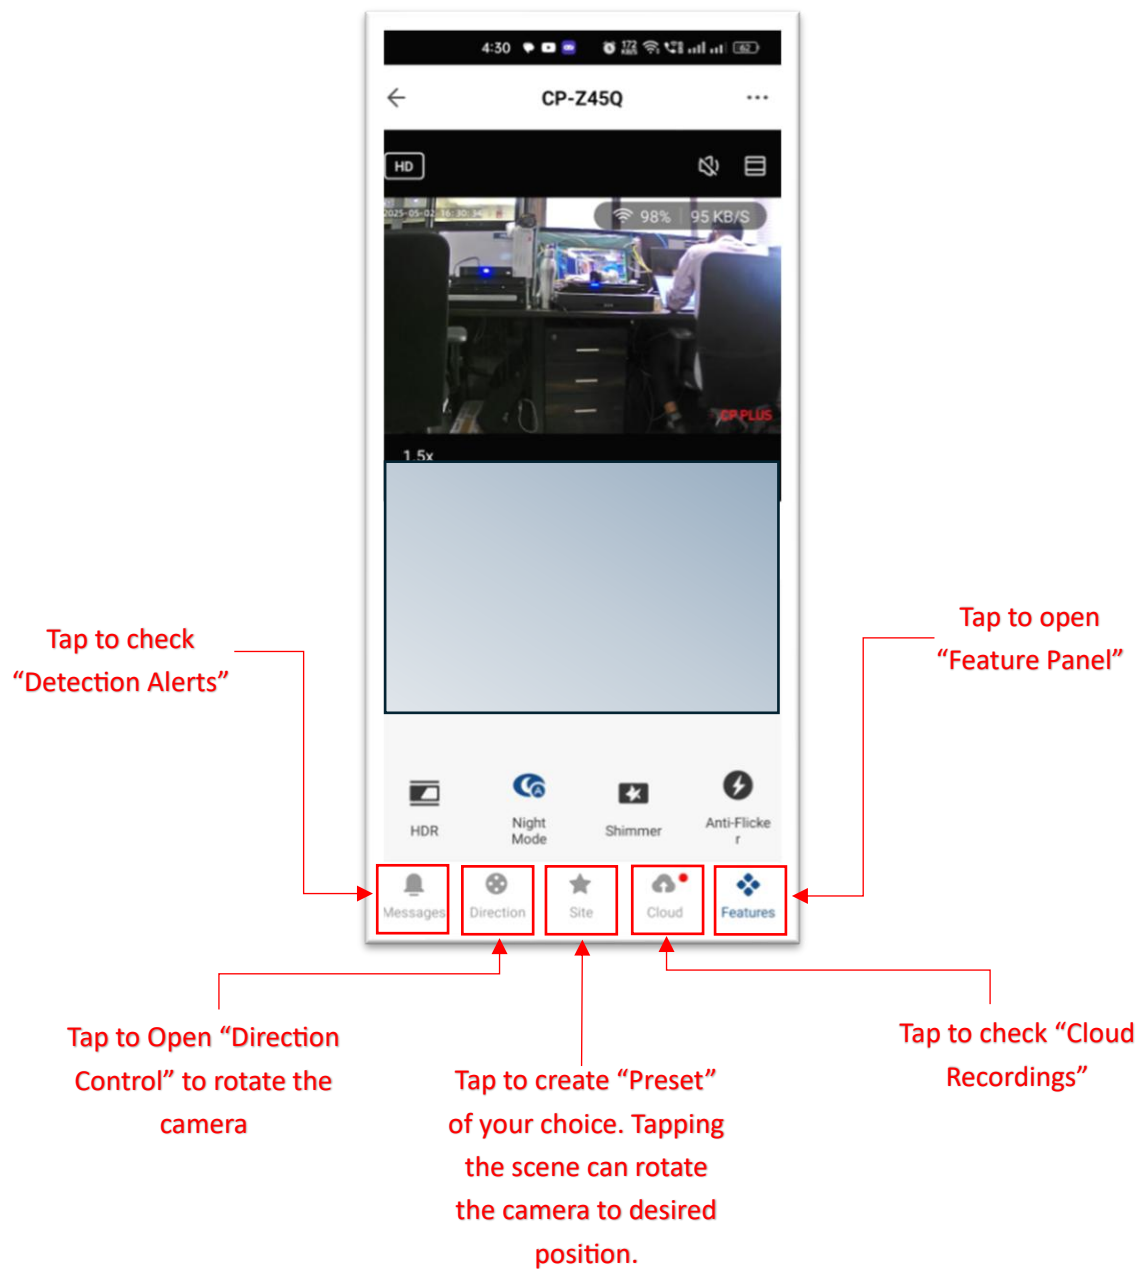


9. ezyKam+ Features Panel

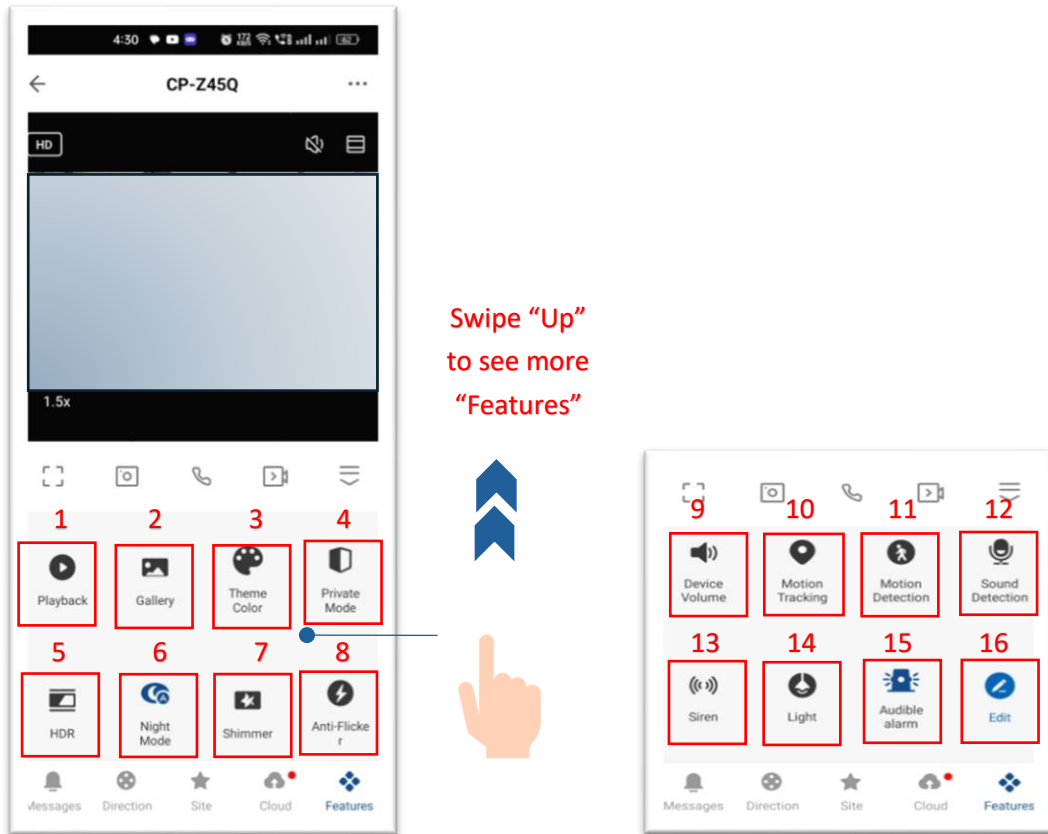


Note: The Features may vary as per the Device Model

S.No.	Image	Feature	Description
1.		Playback	Playback allow watch previously recorded video that's saved on microSD card, allowing them to revisit earlier events straight from the app.
2.		Gallery	You can access, watch, and manage the camera's downloaded videos and photos in one convenient area within the app.
3.		Theme Color	By selecting from a variety of color schemes, users can modify the app's appearance using the theme color setting.
4.		Private Mode	"Sleep Mode" can be enabled or disabled using this function. No recording will take place, and the camera will not display live.
5.		HDR	Enhances image quality by balancing light and dark areas, ensuring clearer and more detailed video footage.
6.		Night Mode	Night mode enables the camera to capture clear video in low-light or dark conditions using infrared or spotlight.
7.		Shimmer	Reduces visual distortions caused by lighting, ensuring a clearer and smoother video feed.
8.		Anti-Flicker	Reduces screen flickering caused by artificial lighting, ensuring stable and clear video footage.
9.		Device Volume	The volume of the camera's speaker can be increased or decreased.
10.		Motion Tracking	Camera automatically follows the movement of a subject within the camera's view, ensuring continuous visibility and coverage.
11.		Motion Detection	Identify movement within the camera's view and instantly alerts via the app.
12.		Sound Detection	When the sound level exceeds (e.g., a loud noise), the camera automatically triggers an alert.
13.		Siren	Trigger a loud alarm to warn nearby residents and discourage invaders.
14.		Light	To provide sharper footage in low light or at night, the light feature automatically illuminates the area surrounding the camera.
15.		Audible Alarm	Enable/Disable camera's spoken notifications during setup or operation.
16.		Edit	The position of feature buttons can be shuffled.

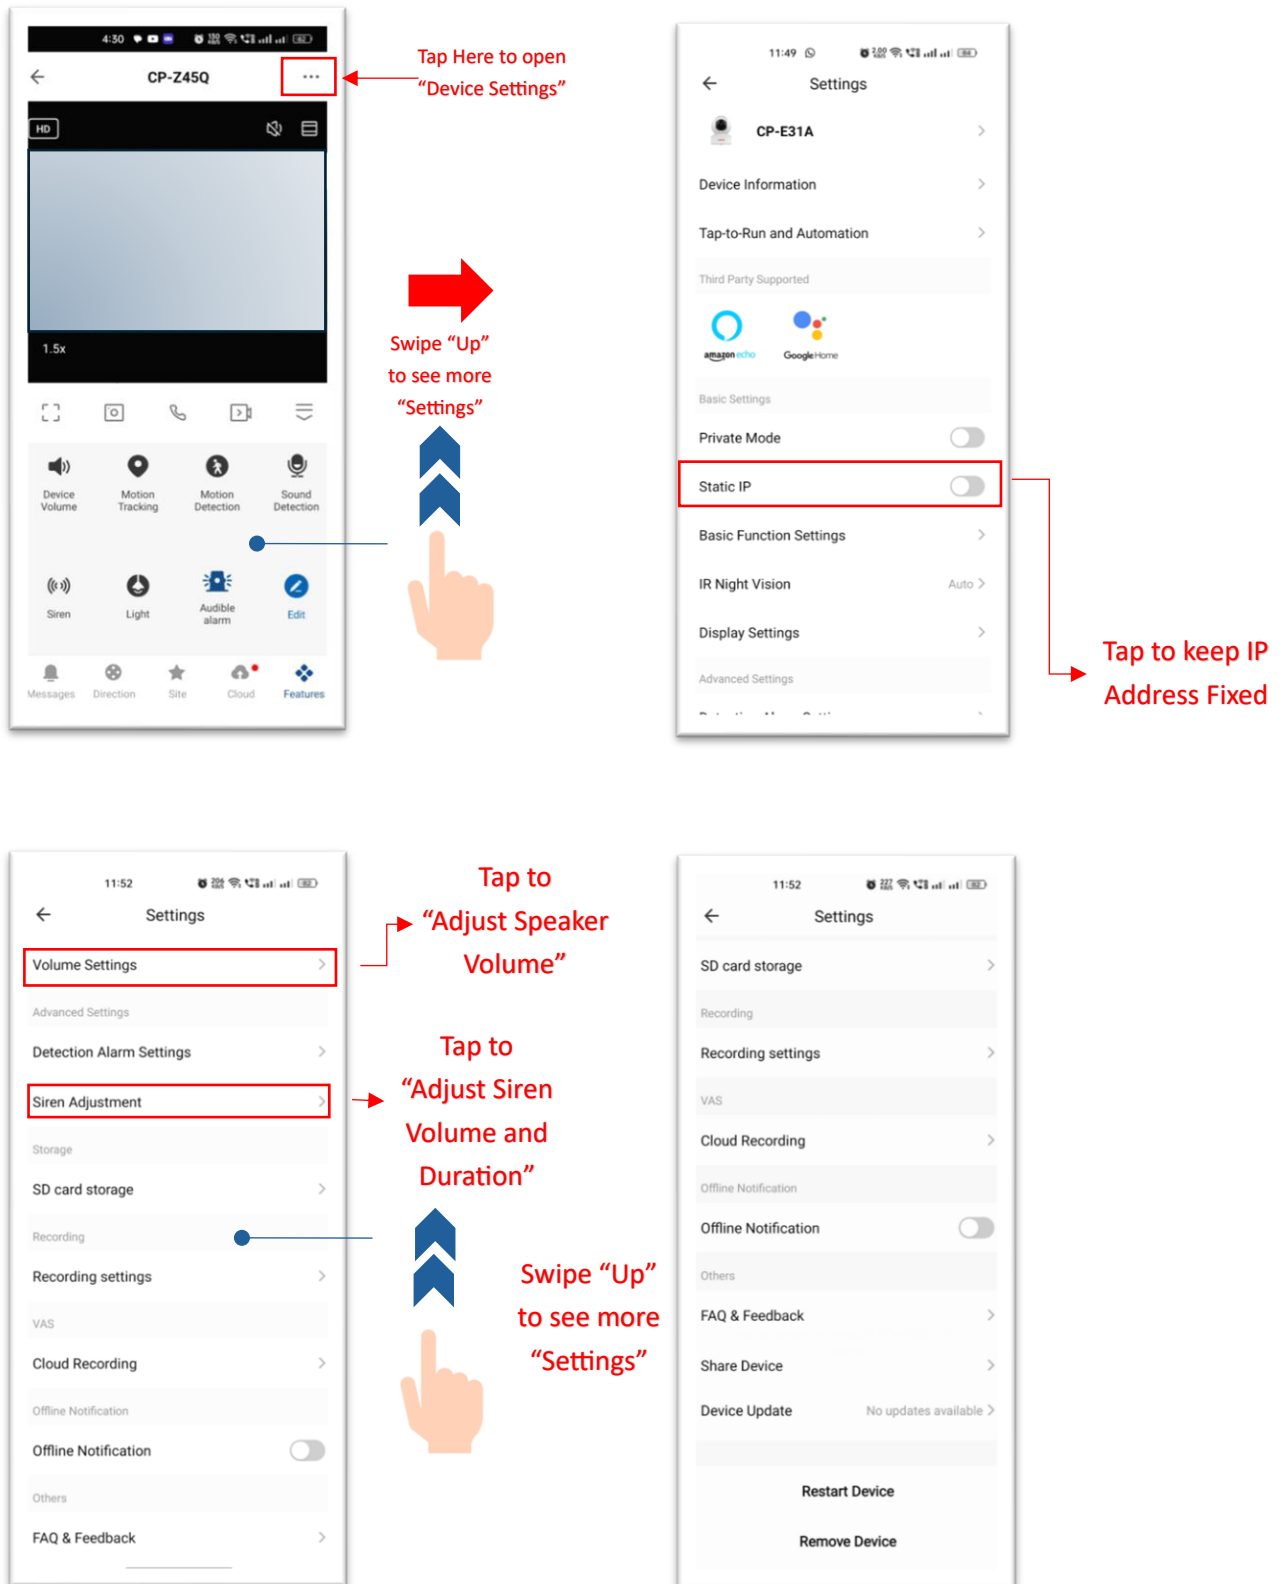


10. Basic Function Settings

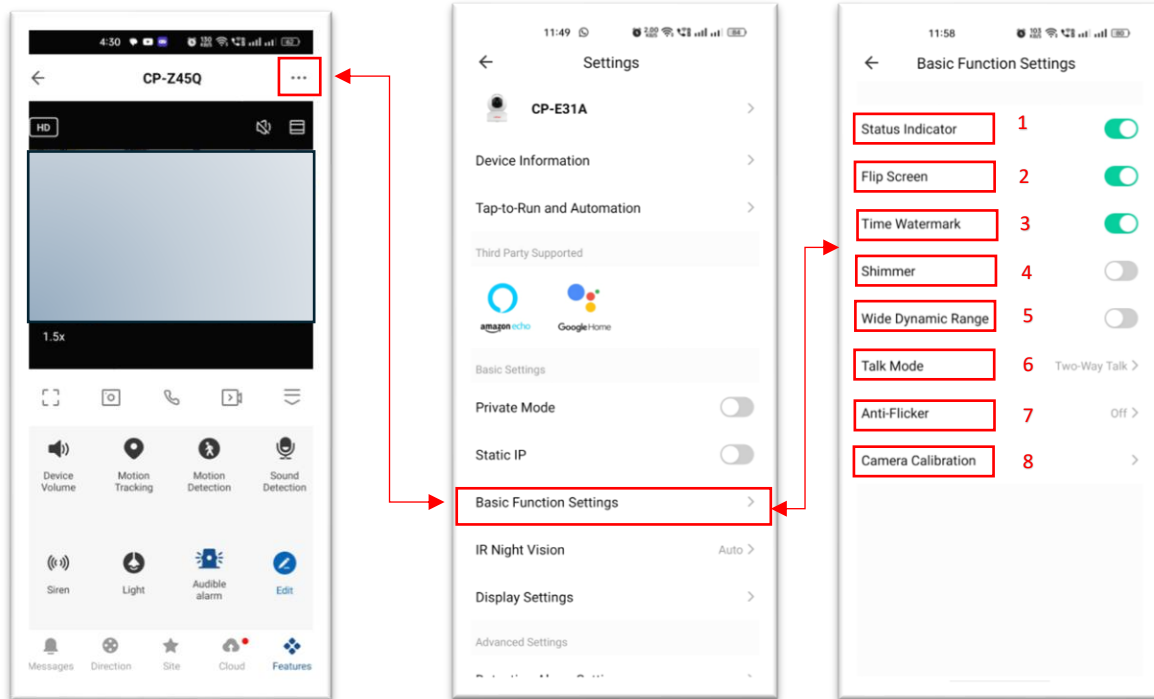


S.No	Function Name	Description
1.	Status Indicator	Status Indicator light of the camera can be enabled/disabled.
2.	Flip Screen	View can be rotated by 180 degrees.
3.	Time Watermark	Time watermark can be enabled/disabled from camera preview.
4.	Shimmer	Reduces visual distortions caused by lighting, ensuring a clearer and smoother video feed.
5.	Wide Dynamic Range	Enhances image quality by balancing light and dark areas, ensuring clearer and more detailed video footage.
6.	Talk Mode	Communication mode can be selected as One-way talk or Two-way talk.
7.	Anti-Flicker	Reduces screen flickering caused by artificial lighting, ensuring stable and clear video footage.
8.	Camera Calibration	Pan/Tilt the camera and calibrate the view.

11. Night Vision Settings

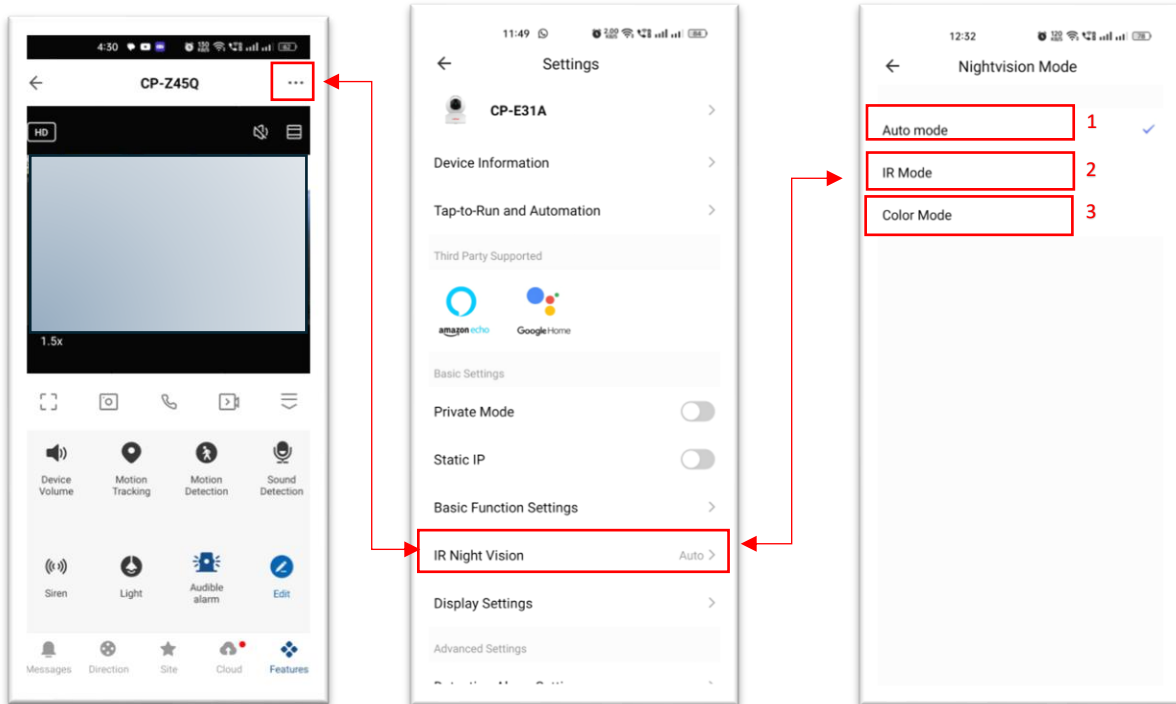


S.No	Feature	Description
1.	Auto Night Mode	This feature is device specific. Night vision mode is Self-Adaptive
2.	IR Mode	Provide IR Night Vision.
3.	Color Mode	Provide Full Color Night Vision. (Device Specific Feature)

12. Detection Alarm Settings

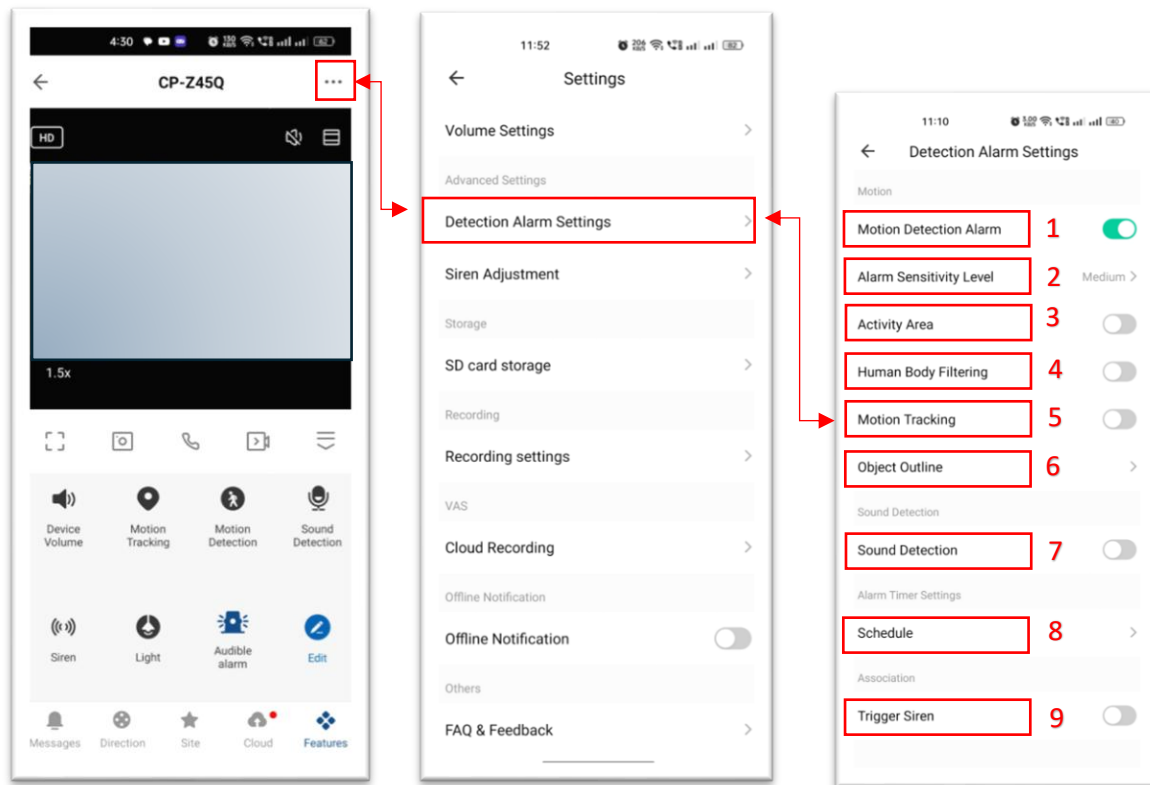


S.No	Feature	Description
1.	Motion Detection Alarm	Identify movement within the camera's view and instantly alerts via the app.
2	Alarm Sensitivity level	Adjust Sensitivity for Detection accuracy.
3.	Activity Area	Specify region within which movements need to be triggered.
4.	Human Body Filtering	Identify Human Parameters within the camera's view and instantly alerts via the app.
5.	Motion Tracking	Camera automatically follows the movement of a subject within the camera's view, ensuring continuous visibility and coverage.
6.	Object Outline	Mark the object identified within camera's view.
7.	Sound Detection	When the sound level exceeds (e.g., a loud noise), the camera automatically triggers an alert.
8.	Schedule	Set a time duration during which you want to enable/disable detection settings.
9.	Trigger Siren	Trigger a loud alarm to warn nearby residents and discourage invaders spotted within camera's view.

13. Recording Settings

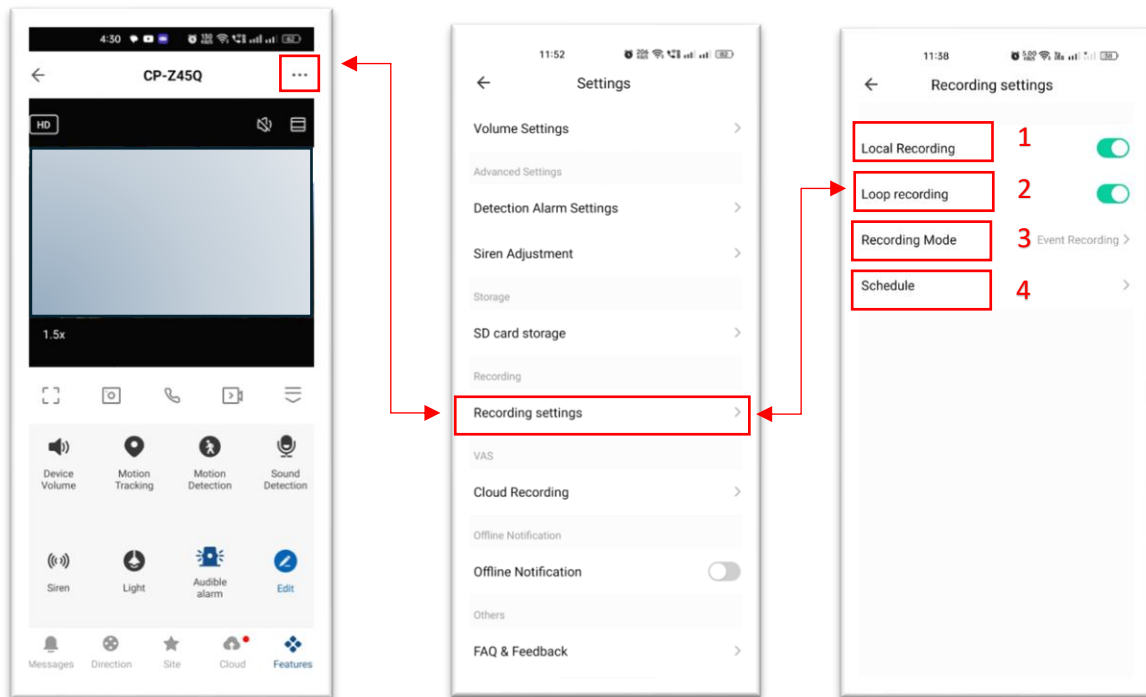


S.No	Feature	Description
1.	Local Recording	Enables/Disable recording in the microSD Card.
2.	Loop Recording	Enable/Disable overwriting data when microSD Card is full.
3.	Recording Mode	Choose recording type as per requirement 1. Event Recording: Allows to record all the events triggered within camera's view. 2. Non-stop: Allows uninterrupted recordings.
4.	Schedule	Set a desired duration to record in microSD Card.


14. Check Playback and download Recordings.

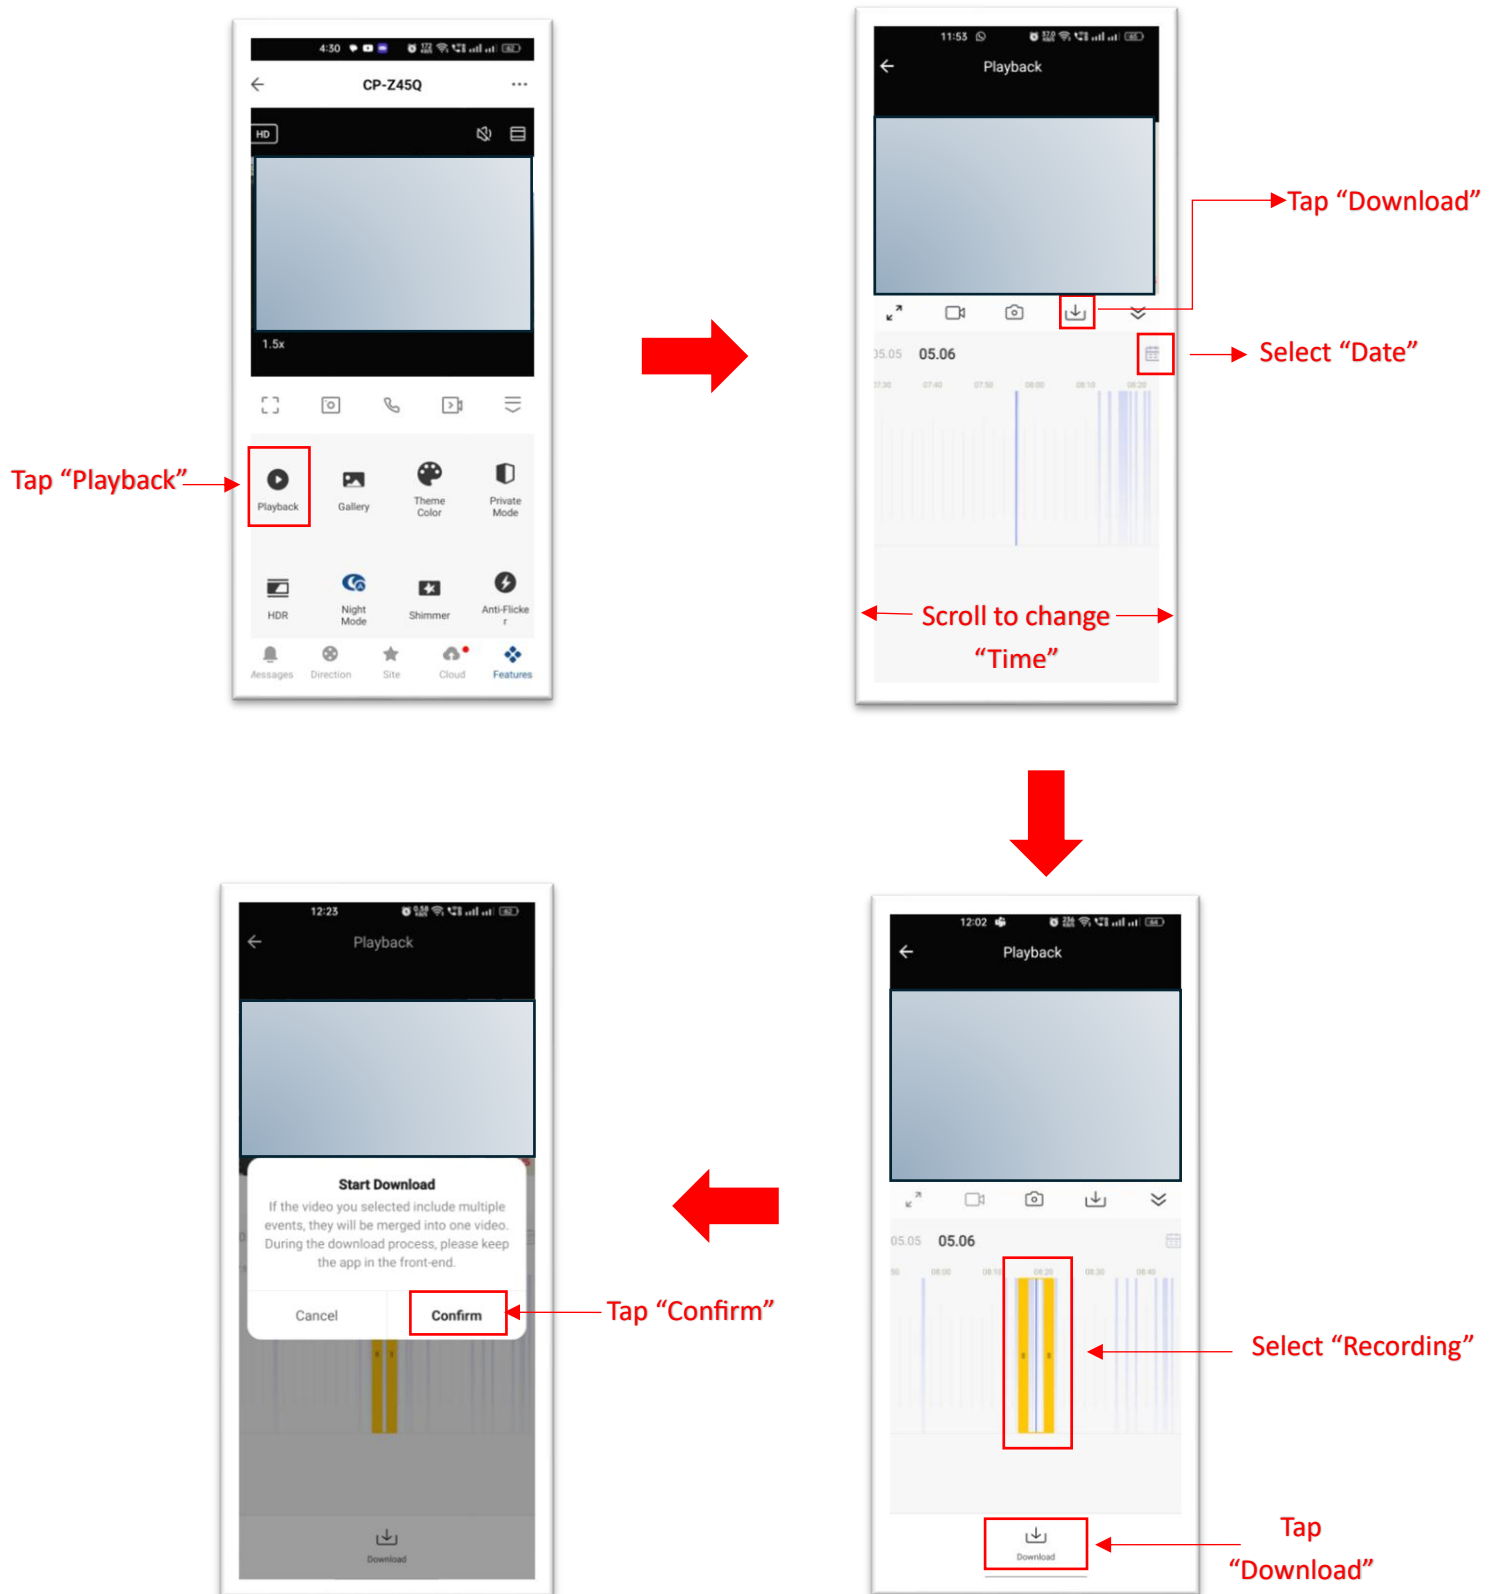


15. Check Cloud Playback download Recording.

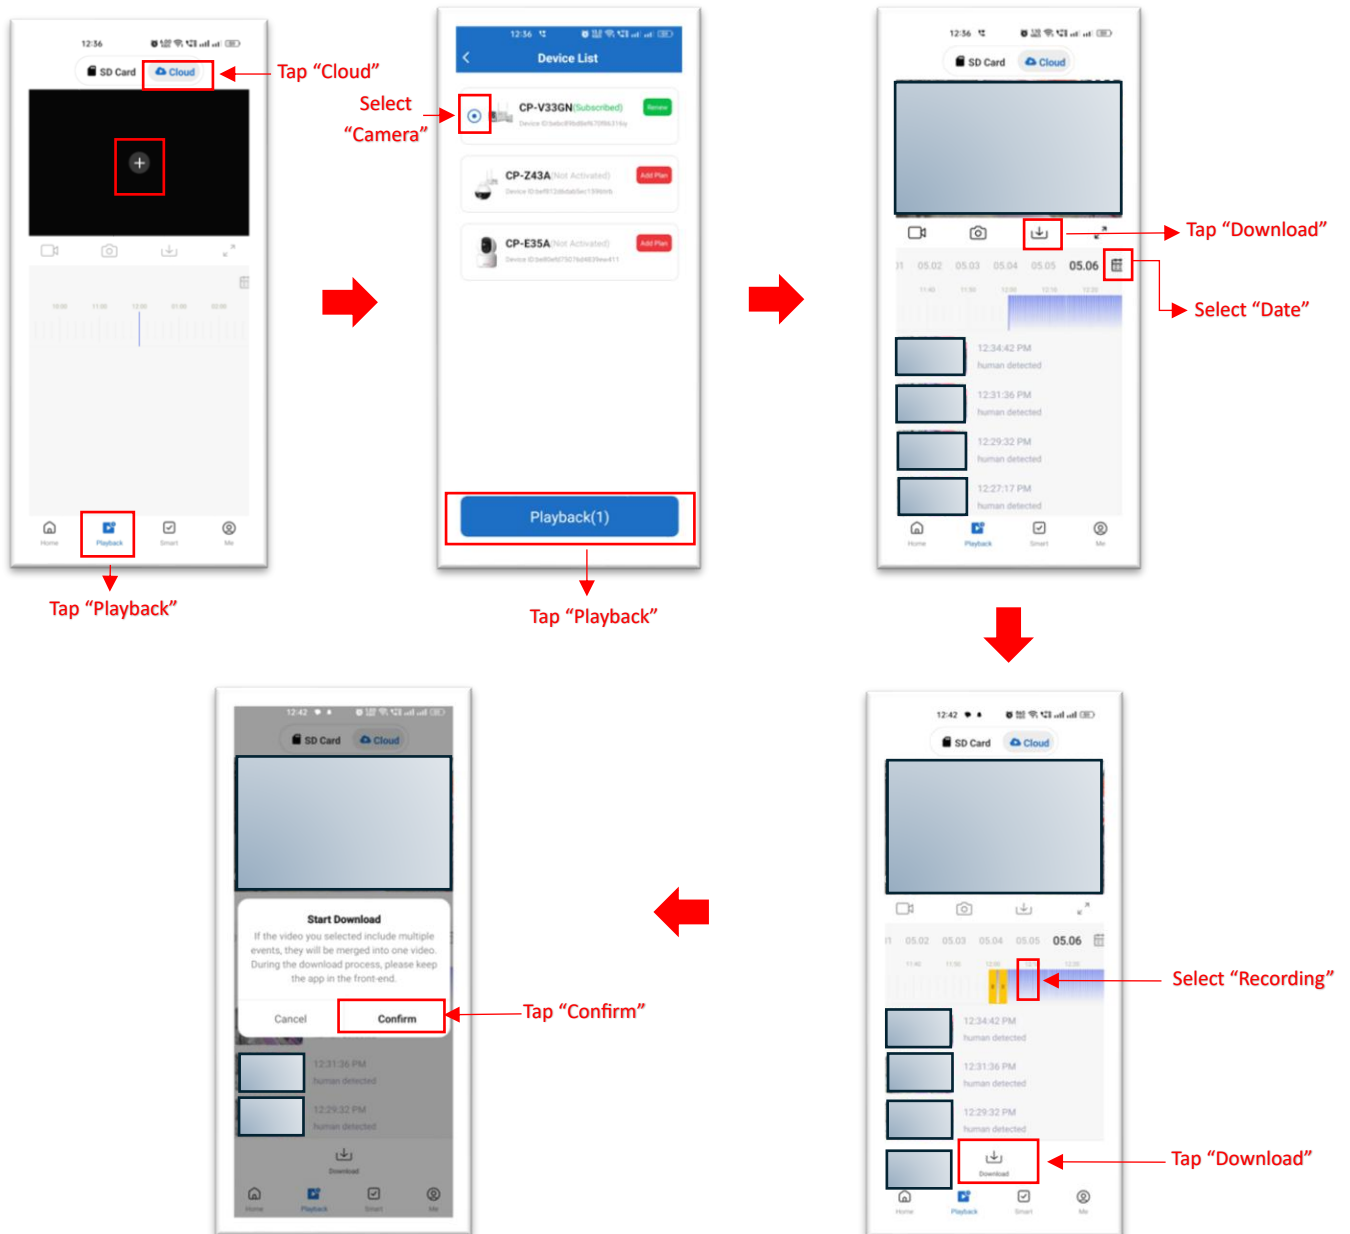


16. Check and Share Downloaded Files.

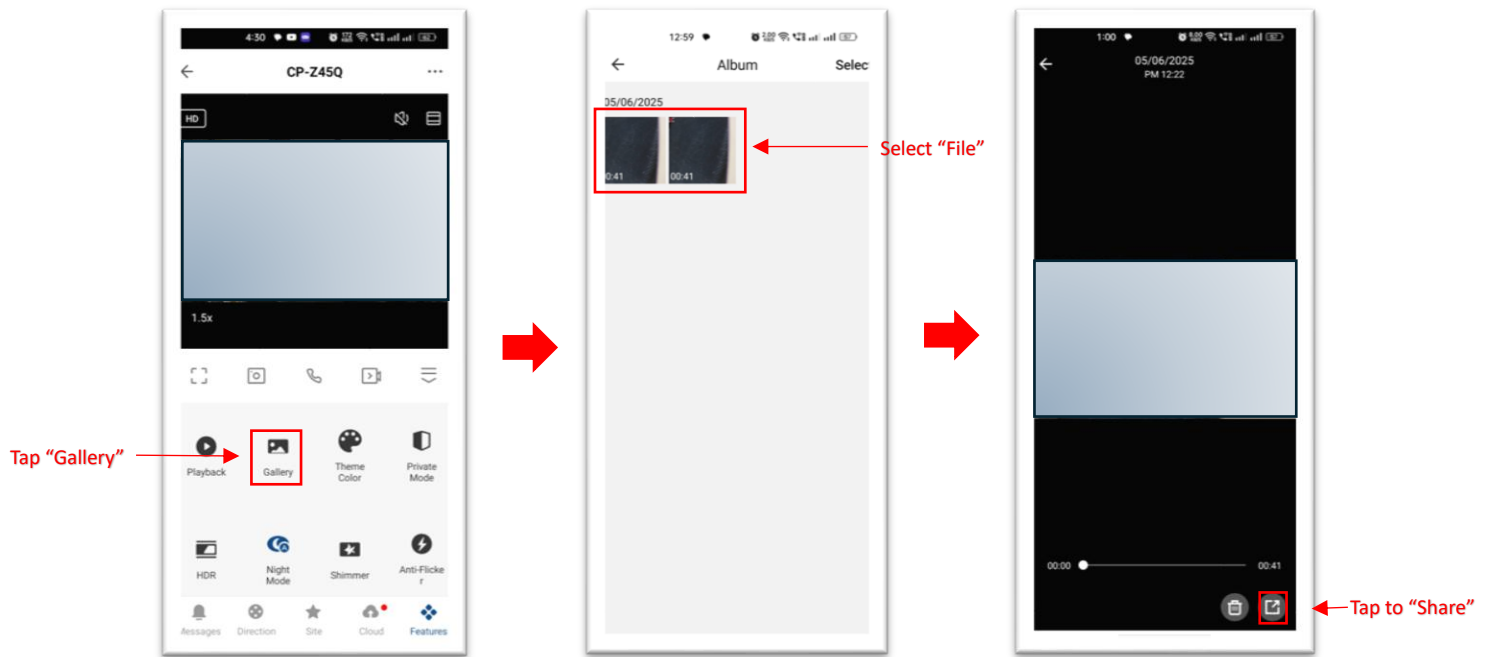

17. Enable ONVIF and Set Password.

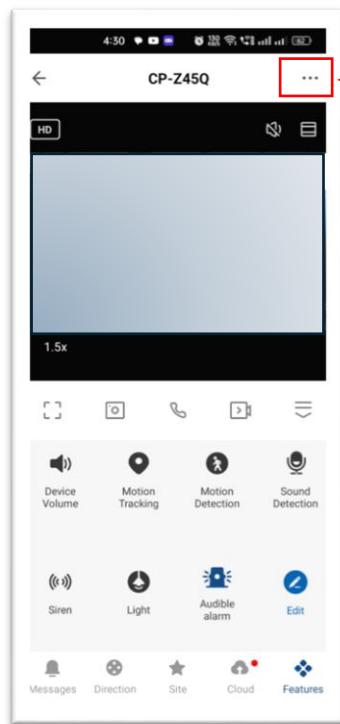


Tap
"Device settings"

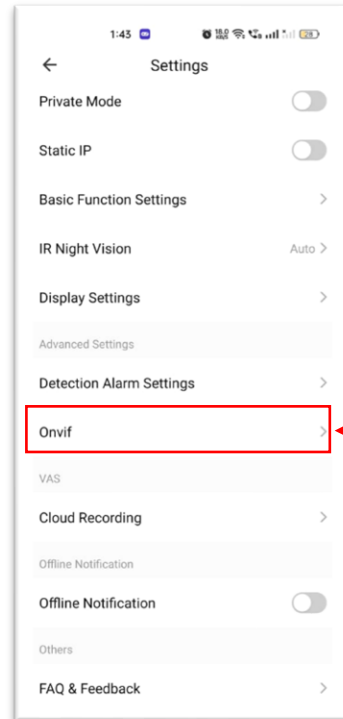


Tap "ONVIF"

Step 2

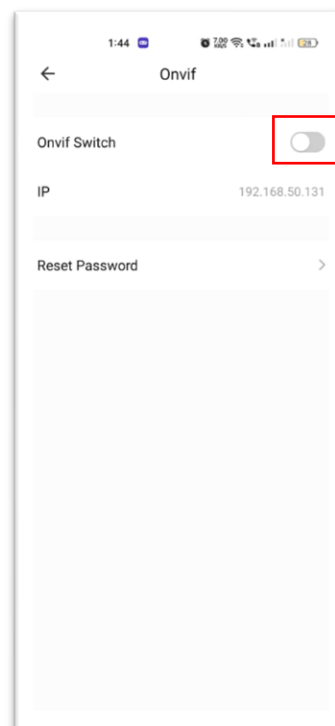

Enable
"ONVIF Switch"

Step 3

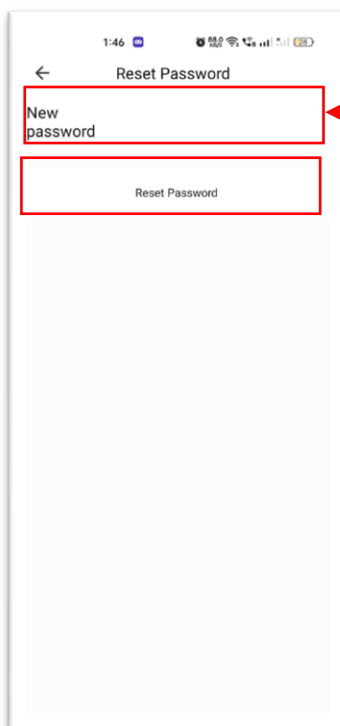


Set "Password"

Tap
"Reset Password"


Step 1

Step 4


18. Share Device in ezyKam+.

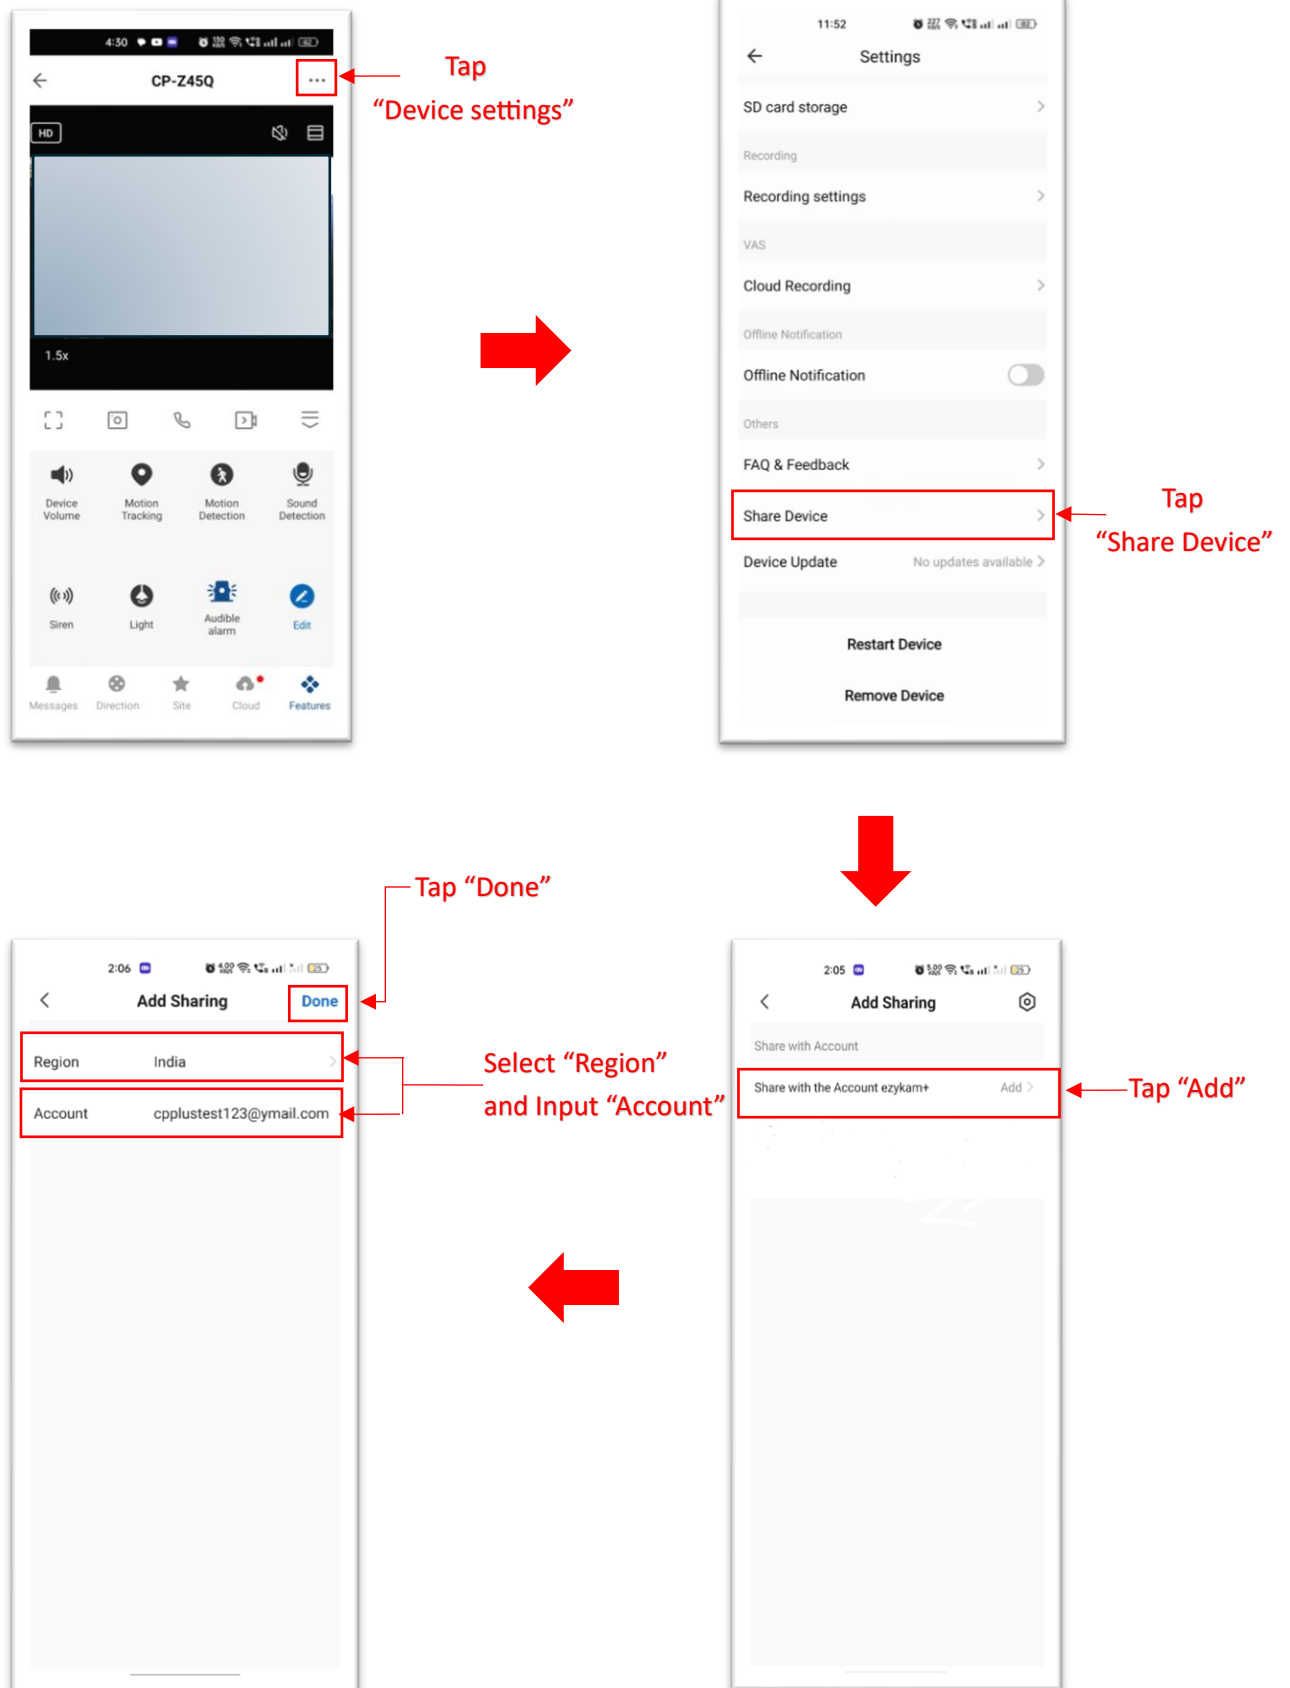

19. Unshare a shared device in ezyKam+.

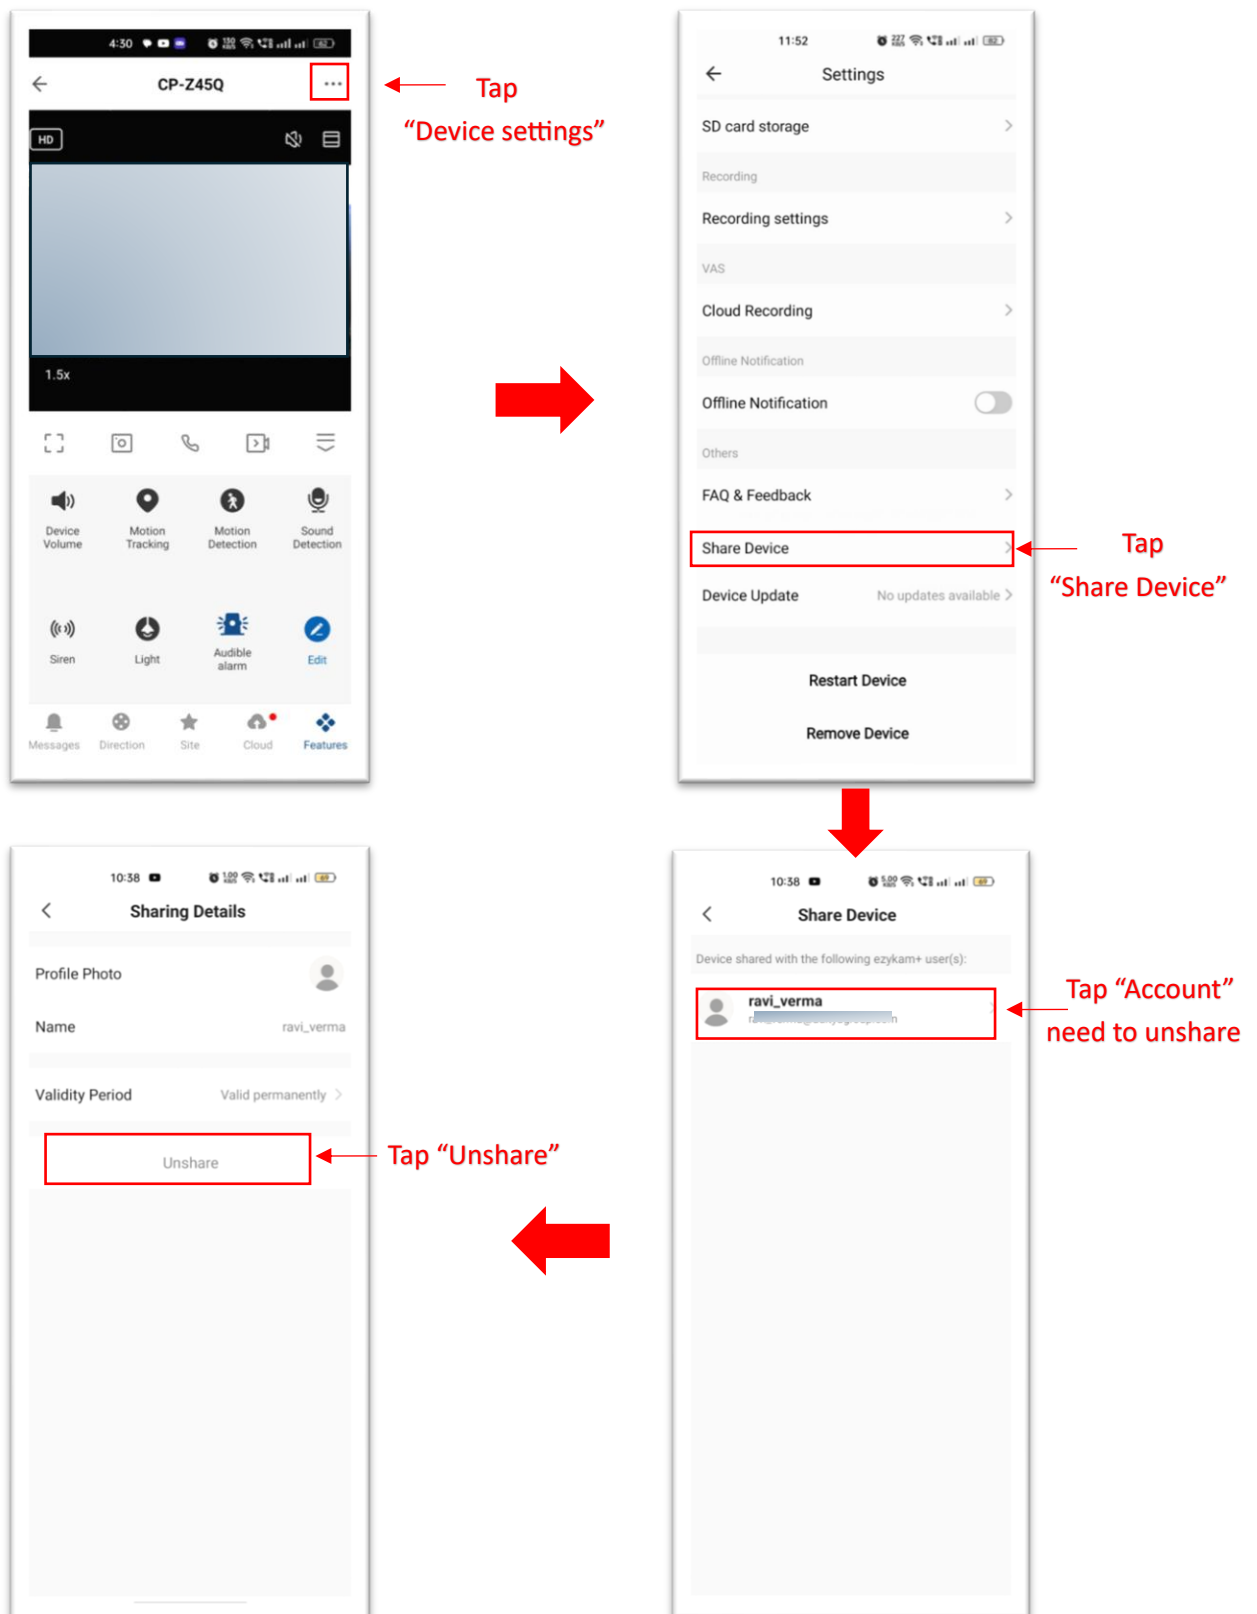


20. Create Schedule in ezyKam+.

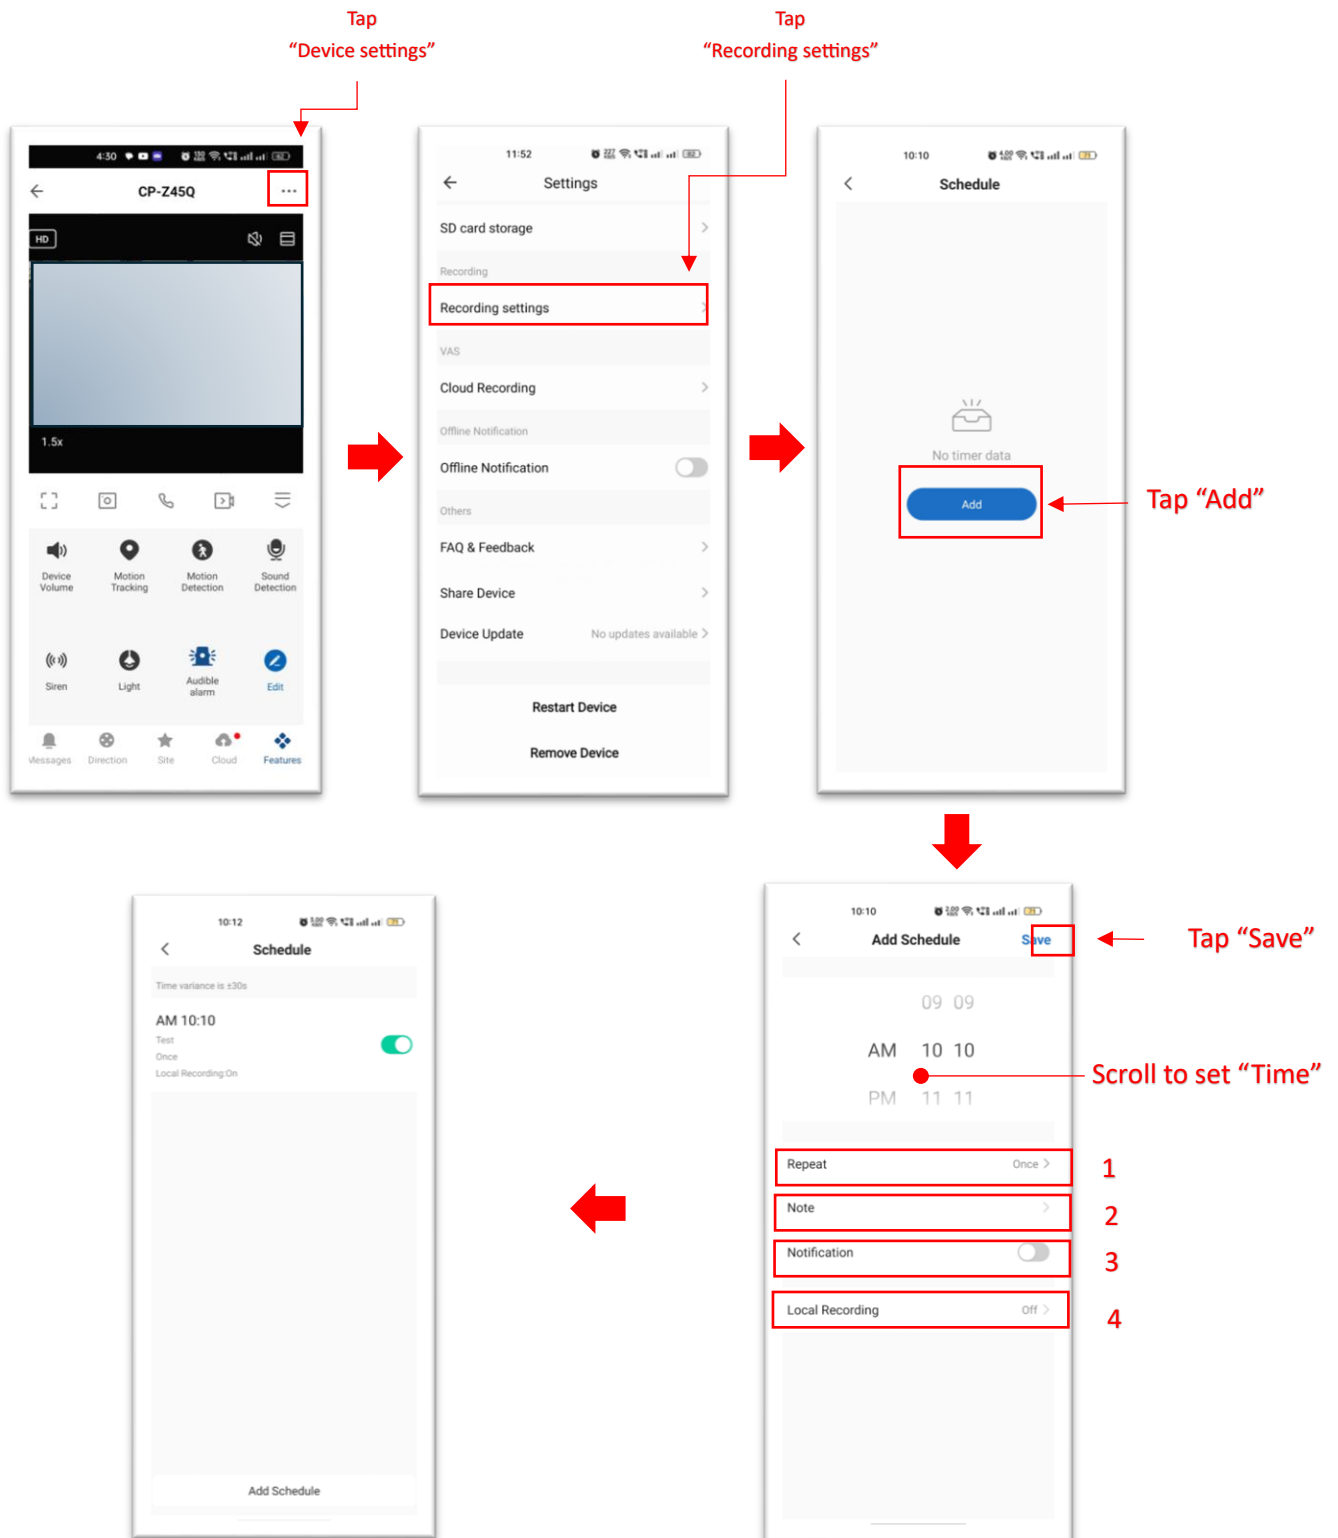


S.No	Feature	Description
1.	Repeat	Set days
2.	Note	Set a "Title" for schedule
3.	Notification	Set alert when schedule starts or stops.
4.	Local Recording	Enable/ disable recording switch.

21. Create Site in ezyKam+.

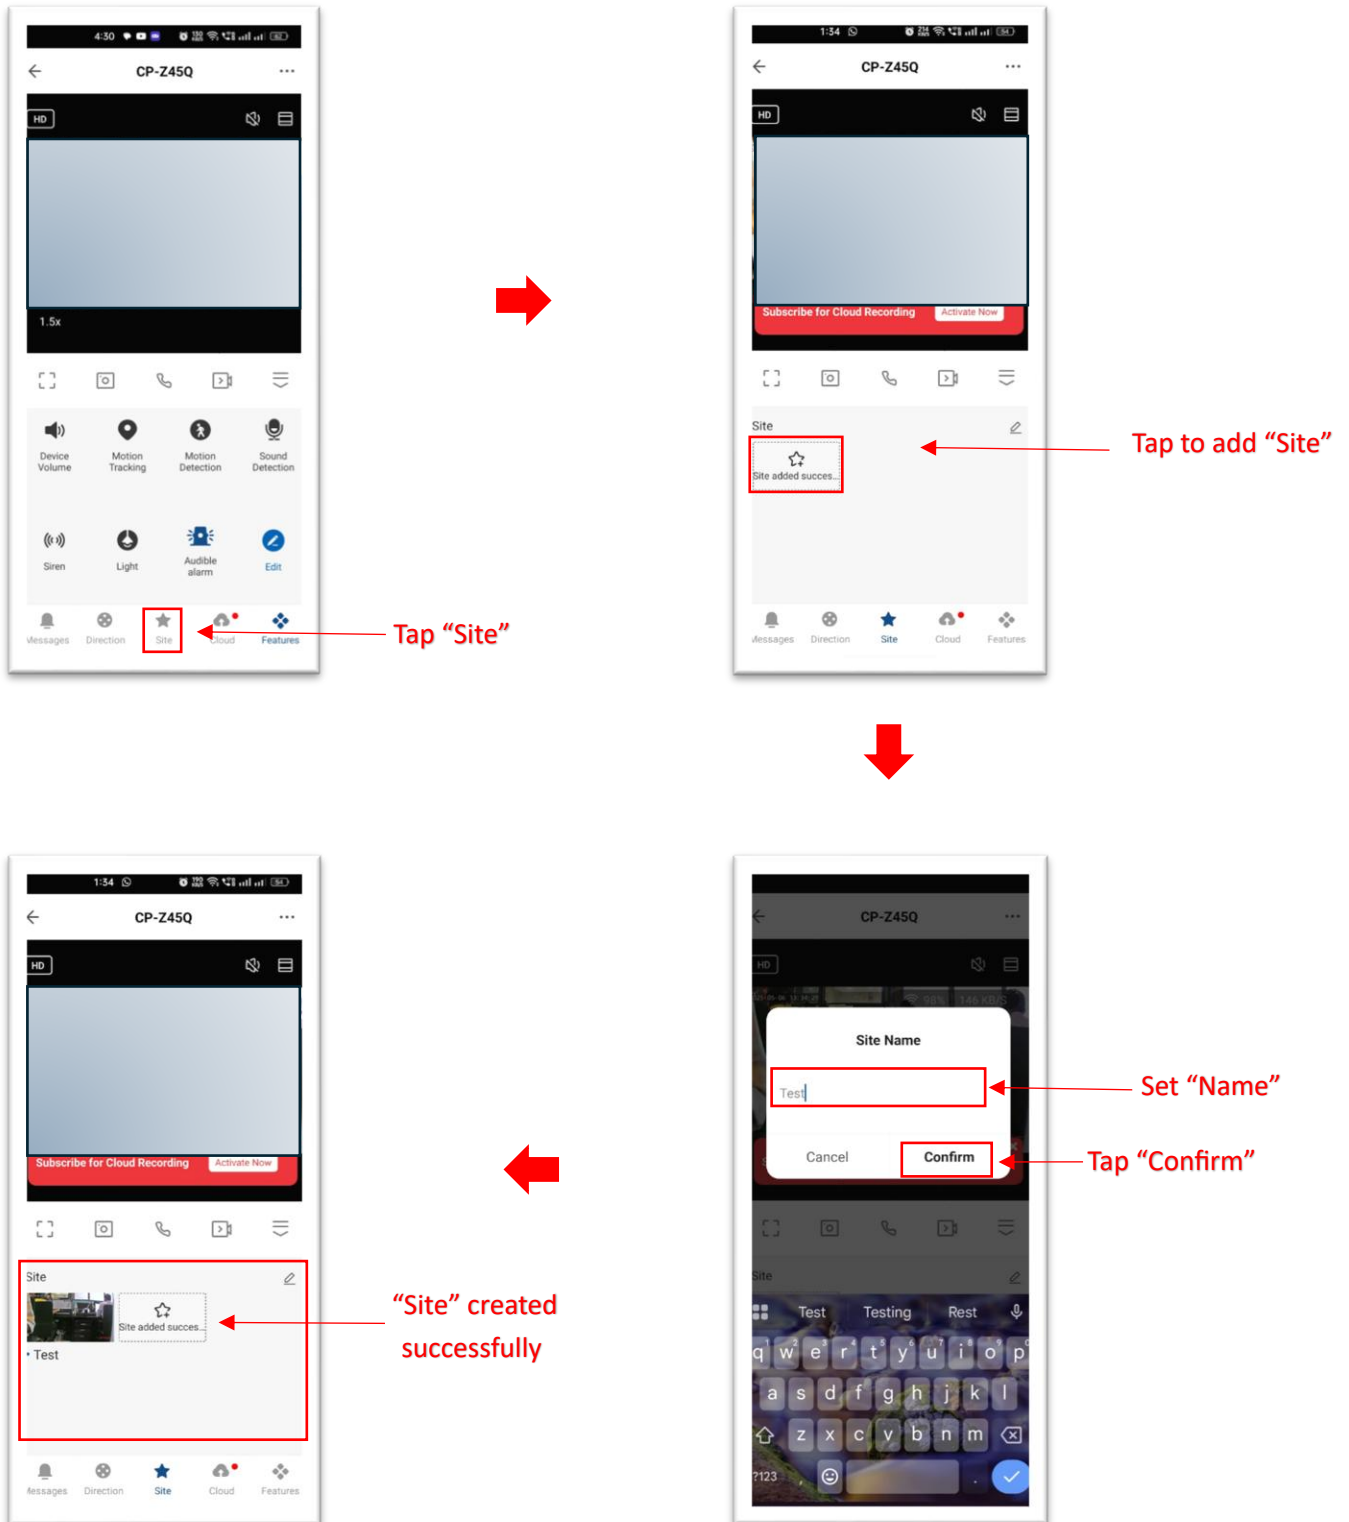

22. Restart and Remove a camera in ezyKam+.

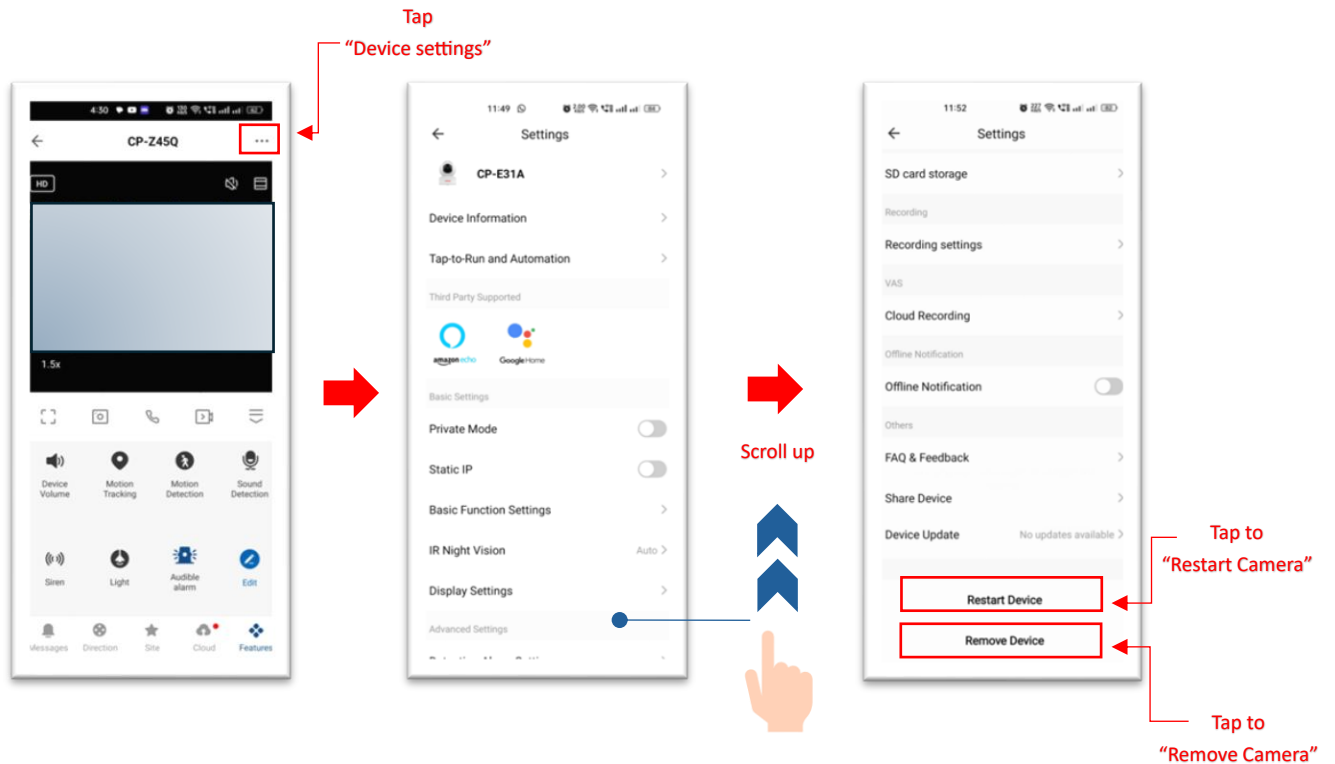

23. Link your ezyKam+ account to Alexa Echo Show and Google Home Nest:

Alexa Echo Show:

<https://cpplusworld.com/services/ezykamalexa/ezyKam-plus-alexa.html>

Google Home Nest:

<https://cpplusworld.com/services/ezykamgoogleassistant/ezykam-plus-google-assistant.html>

Thanks for Choosing CP Plus!



Home on Your Smartphone



Website: - www.cpplusworld.com

Email id: - sales@cpplusworld.com; support@cpplusworld.com
