

# Product Design

## Team CTRL 5

Ololade Awoyemi, Shivam  
Sakthivel Pandi, Biraj Sharma,  
Benjamin Wilson, Sritan Reddy  
Gangidi


**This document presents the product design for our capstone project being put together by Team CTRL 5. It describes the overall system depiction, design rationale, and technical choices that help in developing our solution. The purpose of this document is to indicate that the designs are well-structured, traceable to the requirements and open to changes as we go through development.**

**Our project involves the building of a secure and modular WebAssembly runtime with a Rust-based back-end and a React-based front-end. The design is concentrated upon performance, scalability, and safety so that untrusted WASM modules may execute themselves in an environment characterized by control. The present introduction lays the groundwork for the class diagrams, ER diagrams, UI wireframes and rationales which follow in this document. As development progresses, this document too will progress in describing the refinements and improvements of our system.**


<i>Revision n Number</i>	<i>Revision Date</i>	<i>Summary of Changes</i>	<i>Author(s)</i>
0.1	10/08/2025	Initial designs and diagrams.	Ololade Awoyemi, Shivam Sakthivel Pandi, Biraj Sharma, Benjamin Wilson, Sritan Reddy Gangidi

0.2	11/05/2025	Updated Design Rational, Added Wasm as Os CLI Screenshots, Added Wasm as OS class diagram	Benjamin Wilson


## Class Diagram(s)

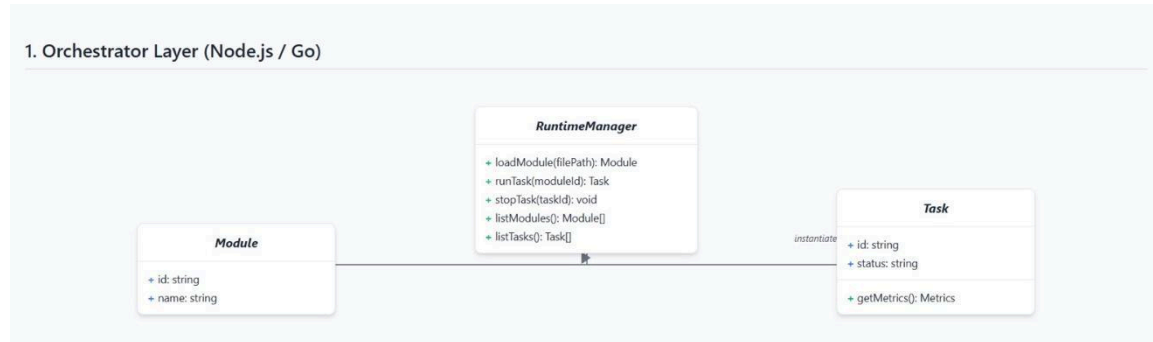

## 2. Rust Core Layer

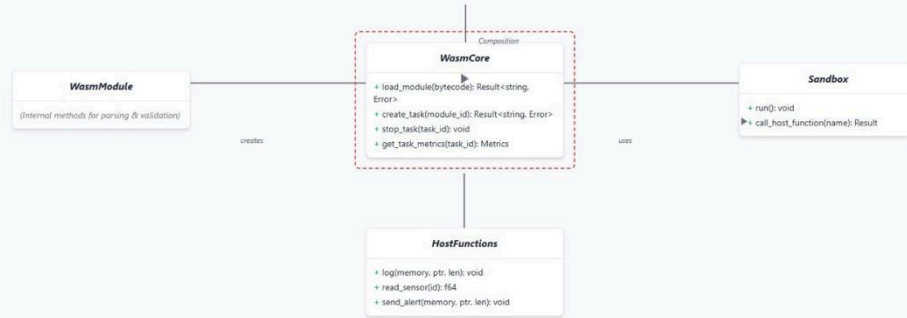


## Wasm as Os Class Diagram

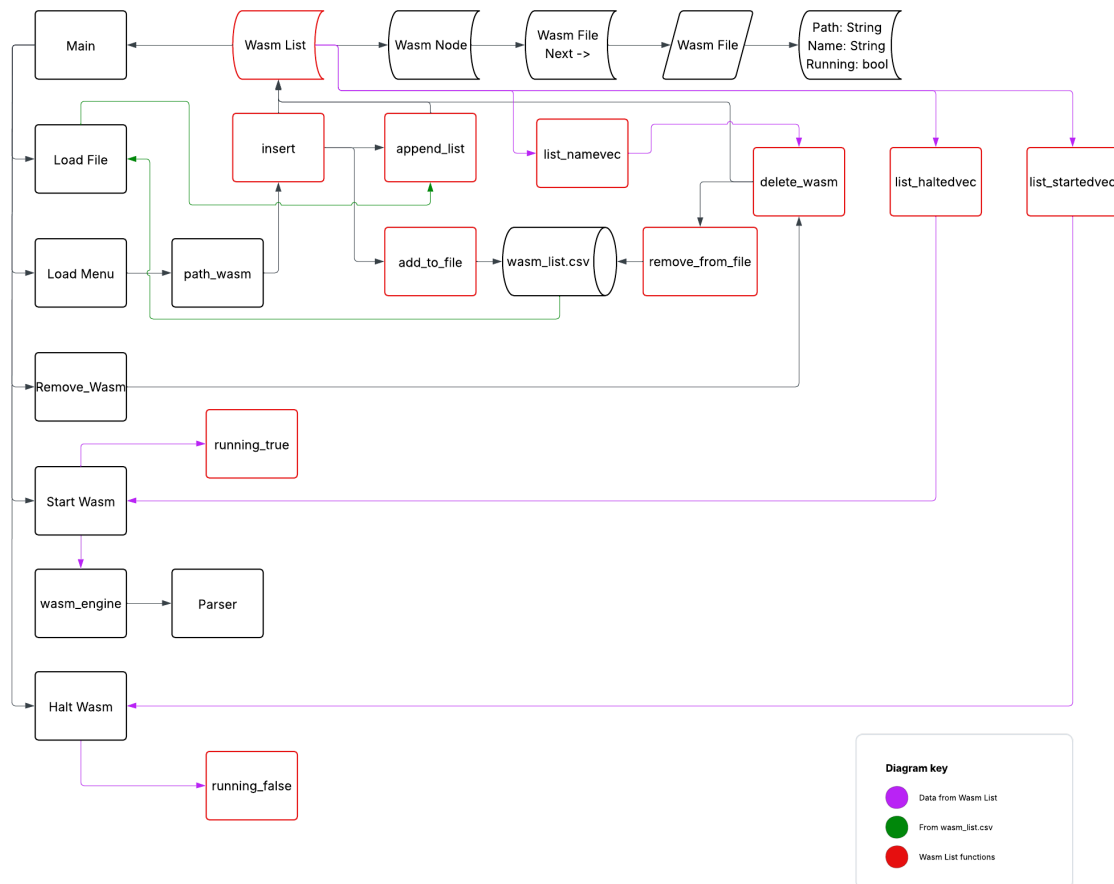

### ER Diagram(s)

## ER Diagram: In-Memory Runtime State


This diagram shows the relationship between entities managed by the runtime.

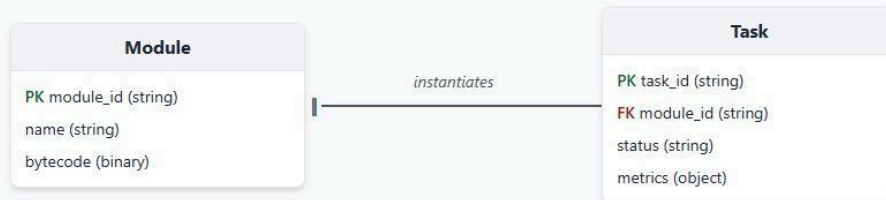


## Information Architecture Diagram


### Information Architecture Diagram


This diagram shows the structure of the web-based user interface.

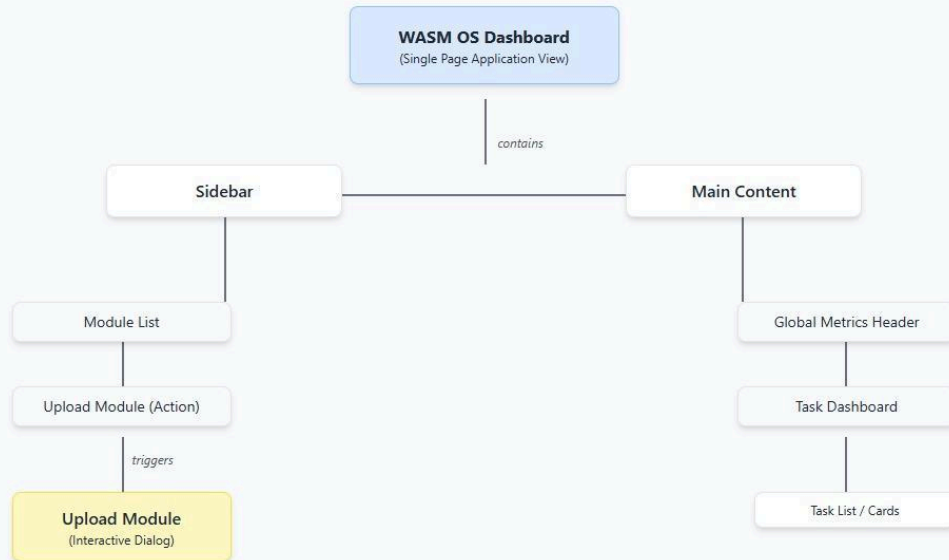

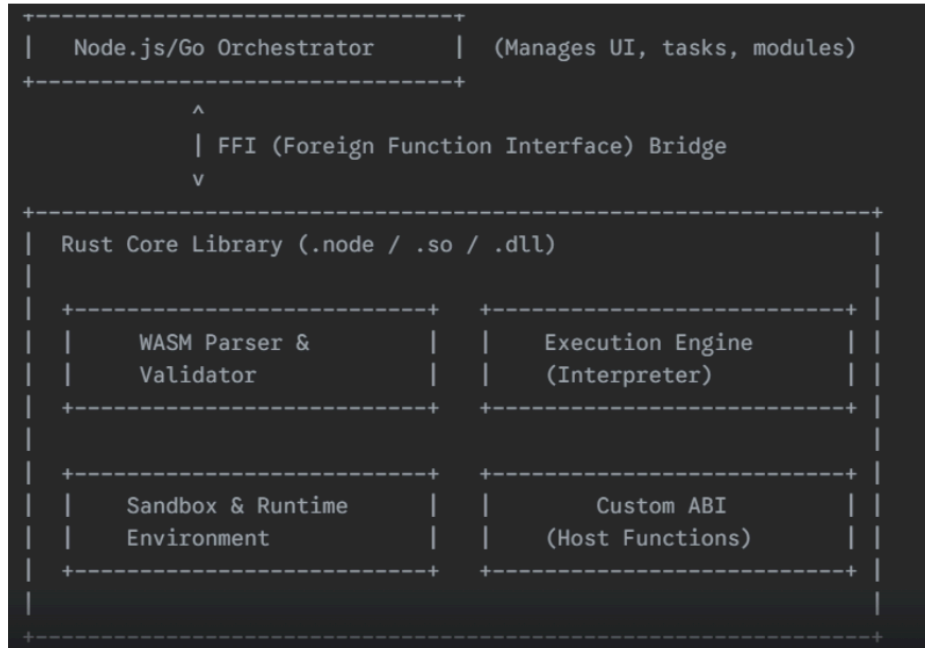

## User Interface Wireframe(s)/Screenshot(s)

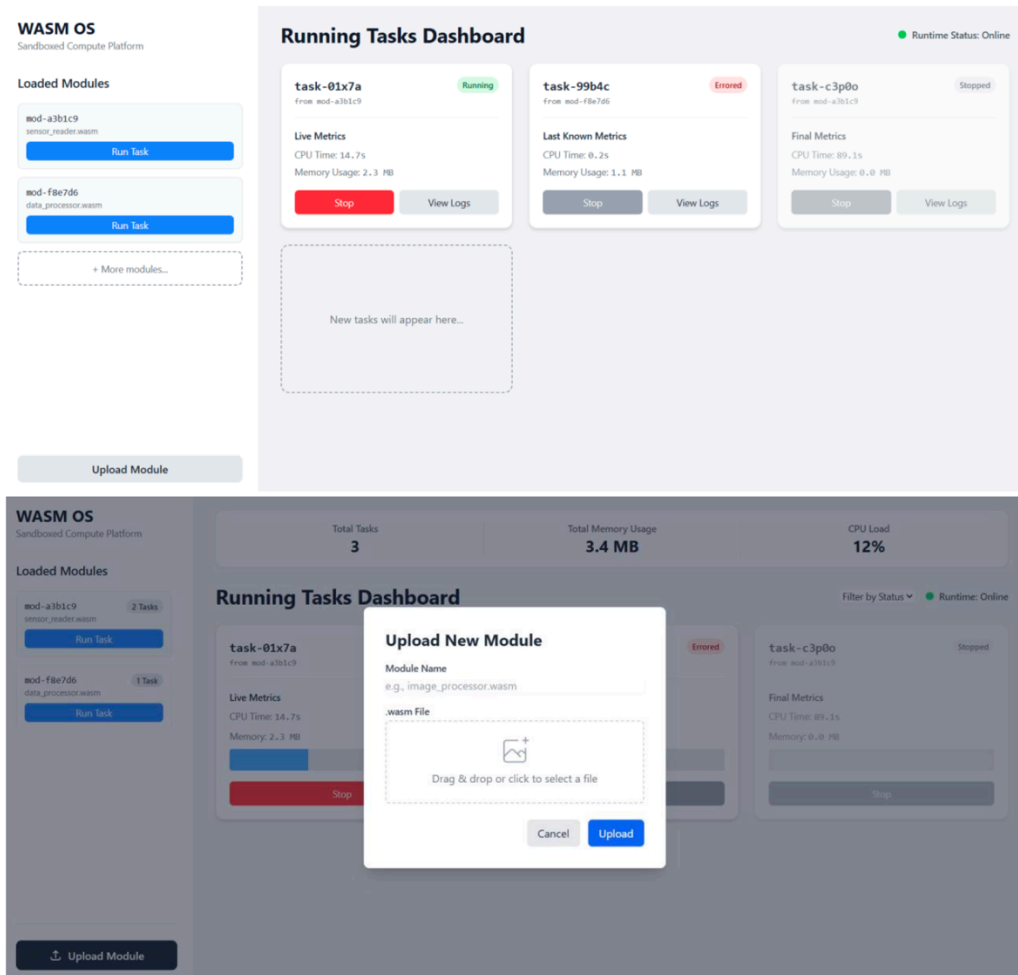

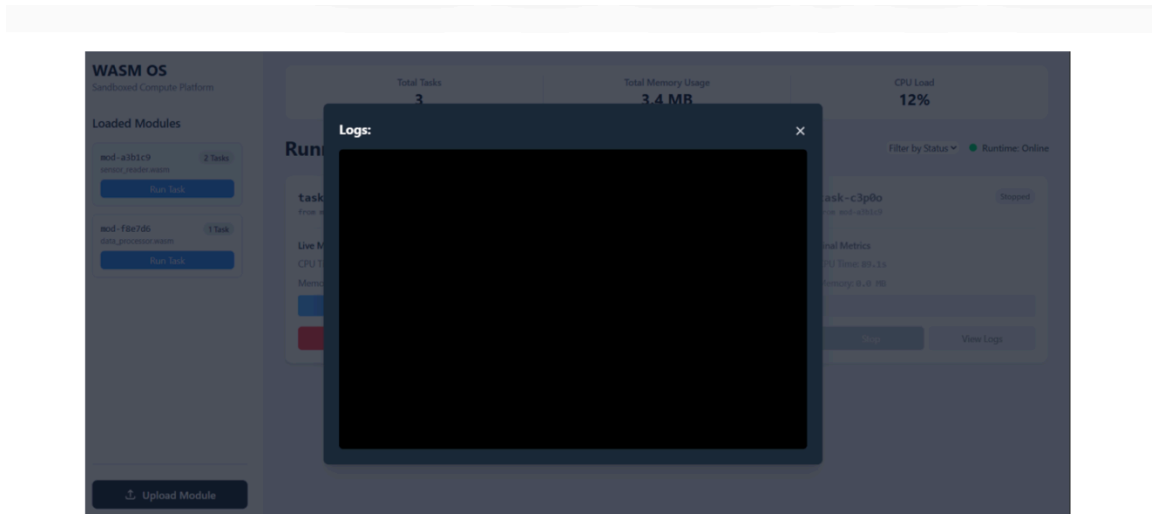

## CLI Screenshots

### MM1: Main Menu

```
? WasmAsOS >
> Load .Wasm File
  Remove .Wasm File
  Runtime Metrics
  Start wasm
  Stop wasm
  Prioritize Wasm's
  Save Machine State
  Shutdown
```

LW1: Load Wasm Menu: Display detect wasm file, Enter path and return to main menu.

```
? File Menu >
> Detect .wasm Files
  Enter Path
  Return to Main Menu
```

**LW2: Enter Path Temporary, Detect Wasm in final product, Verify path is correct, add wasm file to list if path and extension are valid. Reload enter path menu.**

```
✓ WasmAsOS · Load .Wasm File
✓ File Menu · Enter Path
Path: 
```

**LW3: Replace File: If a file with the same name exists, the user is asked if they want to replace it. Either option reloads the path menu**

```
✓ File Menu · Enter Path
Path: C:\Users\daisy\OneDrive\Documents\WasmOSTest\snake.wasm
? File with that name already exists, replace it? >
> Yes
  No
```

**LW3: New File/file added (file name printouts temporary for debugging) Prompts for new path or return**

```
✓ Add File With Path · Add wasm File
Path: C:\Users\daisy\OneDrive\Documents\WasmOSTest\wat1.wat
snake.wasm
wat1.wat
? Add File With Path >
> Add wasm File
  Return to Main Menu
```

**LW4: File not found: display file not found reload path menu.**

```
✓ Add File With Path · Add wasm File
Path: a
File Not Found
? Add File With Path >
> Add wasm File
  Return to Main Menu
```

**DF1: Delete File menu:** Displays all loaded wasm files and return to main menu option. User may select multiple files to delete as menu reloads after each deletion

```
? Delete a wasm file >  
> Return to main menu  
  snake.wasm  
  wat1.wat
```

**DF2: Consent to delete file:** Yes deletes the file from program, both reload delete menu.

```
✓ Delete a wasm file · snake.wasm  
? Delete File? >  
> Yes  
  No
```

**DF3: Menu loops after no**

```
✓ Delete a wasm file · snake.wasm  
✓ Delete File? · No  
? Delete a wasm file >  
  Return to main menu  
  snake.wasm  
> wat1.wat
```

**DF4: Menu loops after yes**

```
✓ Delete a wasm file · wat1.wat  
✓ Delete File? · Yes  
? Delete a wasm file >  
  Return to main menu  
> snake.wasm
```

**DF5: No wasm file to delete**

```
✓ WasmAsOS · Remove .Wasm File  
No files are loaded  
? WasmAsOS >  
> Load .Wasm File  
  Remove .Wasm File  
  Runtime Metrics  
  Start wasm  
  Stop wasm  
  Prioritize Wasm's  
  Save Machine State  
  Shutdown
```

**RT0: Runtime Metrics not functional at this time**

**SW1: Start Wasm Menu: Display Menu of files that can be run and return to main menu option. After a file is run loop updated menu.**

```
✓ WasmAsOS · Start wasm  
? Start a wasm file >  
> Return to main menu  
  snake.wasm  
  wasm1.wasm
```

**SW2: Looped menu: After starting a module (only UI functional currently, To parse temporary debug statement meaning file reached the parser)**

```
✓ WasmAsOS · Start wasm
✓ Start a wasm file · snake.wasm
To Parse
? Start a wasm file >
> Return to main menu
  wasm1.wasm
```

**SW3: Invalid File (calls delete file function)**

```
✓ Start a wasm file · wasm1.wasm
Invalid file
? Delete File? >
> Yes
  No
```

**SW4: No files to run: If no files to run return to main menu**

```
✓ Delete File? · Yes
✓ WasmAsOS · Start wasm
No wasm modules to run
? WasmAsOS >
> Load .Wasm File
  Remove .Wasm File
  Runtime Metrics
  Start wasm
  Stop wasm
  Prioritize Wasm's
  Save Machine State
  Shutdown
```

**PW0: Pause Wasm menu coming soon**

**SM1: Stop Wasm Menu:** Display a menu of all running wasm files and option to return to the main menu. Function loops displaying updated menu after a wasm is stopped.

```
✓ WasmAsOS · Stop wasm
? Stop a wasm file >
> Return to main menu
  snake.wasm
```

**SM2: No wasm files to stop:** if no wasm files are found display a message and return to main menu

```
✓ WasmAsOS · Stop wasm
No running wasm modules
? WasmAsOS >
> Load .Wasm File
  Remove .Wasm File
  Runtime Metrics
  Start wasm
  Stop wasm
  Prioritize Wasm's
  Save Machine State
  Shutdown
```

**PW0: Prioritize Wasm's (Scheduler not functional)**

**S0: Save Machine State (Not required by our client but may be a neat feature if there's time)**

## Design Summary

*Our design focuses on building a secure and modular WebAssembly runtime using Rust for the backend and React for the web interface. The runtime acts as the core execution environment, responsible for parsing, validating, and executing .wasm modules within strict sandbox limits. It manages tasks, memory, and system calls through a custom ABI to ensure safe and isolated execution.*

*A lightweight command-line interface is implemented first for simplicity and testing, while the web UI (developed in React) provides a more user-friendly dashboard. The dashboard allows users to upload, start, pause, and stop modules, and view real-time runtime metrics such as memory usage, operation speed, and active tasks.*

*The system's structure includes:*

- *A Rust core library handling the execution engine, sandbox environment, and task scheduling.*
- *An optional Node.js/Go orchestrator layer that bridges the Rust core with the web frontend.*
- *A React-based dashboard that serves as the main point of interaction for users.*

*Together, these layers form a secure, extensible platform that simulates a lightweight, sandboxed operating system capable of running untrusted WASM code safely and efficiently.*

## Design Rationale

- What language should be used for our backend(WebAssembly Engine): Rust/Go  
=> Rust
  - Rust: Memory safe and efficient, large number of resources available for learning but difficult to learn, useful cargo containers for our project, existing webassembly engines to draw inspiration from.
  - Go: Easy to learn, less resources to learn from, less libraries for webassembly, built in garbage collector adds overhead, Memory safe.
- Command line or web interface: => Implement both, cmd interface first Web UI would be nice but our client thinks a command line interface is acceptable.
  - Command line: Simple to implement, would only require us to code in Rust, Not very impressive, our client is ok with this
  - Web UI: Can better display data, more resource consumptive, easier to use, shows extra effort.
- What language should be used for the web interface => Javascript
  - Rust: Has packages for ui use, would allow us to code the project solely in Rust but may not be the most well suited for our UI since it's more of a backend language and lacks features useful for UI development.
  - Go: Would allow us to study multiple languages but could complicate the development process by increasing the learning load. Also more of a backend language which would make the UI harder to implement.

- React: Good choice for our web UI, made for developing web UI's. Would work well as the frontend to our Rust backend.
  - Javascript: Great choice for our web ui, abundant information available on the language.
- CLI interface menu design => Dialoguer\_rs
  - Custom made: More flexible, would allow us to create a menu designed just for our product. More time costly
  - Menu\_rs: Good crate for creating simple menus, would speed up production but the menu may not be very sophisticated.
  - Dialoguer\_rs: Great choice for our project, makes semi complex menus which can use a custom theme. Compatible with other crates to make menus better.
- Rust
  - Add a wasm file: => Implement add by path now replace later with wasm search
    - Add by path: User will have to manually enter wasm file paths to add them to the program. Not very convenient but easy to implement
    - Search for wasm files: Recursively search through user directories to find wasm files, Will be slow if the user has many folders and files but much more practical and convenient.
  - Add wasm file: display options to add by path, browse wasms or return to the main menu. Recursively call the menu function after the user selects a choice and adds a wasm module.
  - Delete wasm file:
    - Display list of wasm files to delete and return to menu. After the user selects a file stop the file if it is running and delete from wasm list, recursively call delete wasm file function.
  - Start wasm file:
    - Display list of nonrunning wasm files and return to menu option. Start wasm file selected by user and recursively call start wasm file function
    - Changed recursion to a loop so the program doesn't search for nonrunning wasm files additional times
  - Halt wasm file:
    - Display list of running wasm files and option to return to menu. Halt user selected wasm file and recursively call function again to display additional files for the user to halt
    - Changed to a loop so the program doesn't use extra resources in the event the user wants to halt multiple files.
  - Pause wasm file:
    - Will be implemented very similarly to halt wasm file but will not actually stop the module
  - Runtime Statistics
    - Will display memory usage and other data

- Wasm Engine:
  - Check for wasm file magic numbers and version so the program doesn't attempt to run an invalid file.
  - Send byte array collected from wasm file to a parser to write into memory
- Scheduler
  - Allow user to specify which module gets how much of the resources allocated
  - Use a thread for each module?