
BNC 50 ohm PCB Receptacles



Standard Height 50 ohm BNC Printed Circuit Board Right Angle Bulkhead Receptacles &



Isolated from Panel White Valox Housing **31-5431** ▲ (Round Pins) 31-5431-10RFX



Isolated from Panel Black Valox Housing 31-5538 (Round Pins) **31-5431-1010** (Fork Pins) **31-5538-1010** (Fork Pins) 31-5538-10RFX



Metal Housing 31-5640▲ (Round Pins) 31-5640-1010 (Fork Pins)

Fig. 2

.500(12.7) Р .468(11.9) 1.12 (28.4) e max. panel 468(11.9) 190(4.8) 025(0.6) across one flat .028(0.7) dia. .500-28 UNF-2A thd. (2.3) fork pins (2)

Low Profile 50 ohm BNC Printed Circuit Board Bulkhead Receptacles ☆



Isolated from Panel White Valox Housing **31-5486** (Round Pins) **31-5486-1010** (Fork Pins) **31-5540-1010** (Fork Pins) 31-5486-10RFX



Isolated from Panel Black Valox Housing 31-5540 (Round Pins) 31-5540-10RFX

Vertical 50 ohm BNC Printed Circuit Board Bulkhead Receptacles ☆




Metal Housing 31-5637 (Round Pins)

Fig. 3

.468 (11.9)

across



:162(4.1)

.150(3.8)

(0.6) 1500 stand-off pads (4)

Isolated from Panel White Valox Housing **31-5493**▲ (Round Pins) **31-5493-1010** (Fork Pins)



Isolated from Panel Black Valox Housing **31-5539** (Round Pins) **31-5539-1010▲** (Fork Pins) 31-5539-10RFX




Metal Housing 31-5633 (Round Pins) 31-5633-1010 (Fork Pins)

▲ distributor stocked ☆ Jam nuts and lockwashers sold separately.

062(1.6)

.500-28

PCB Receptacles and Accessories

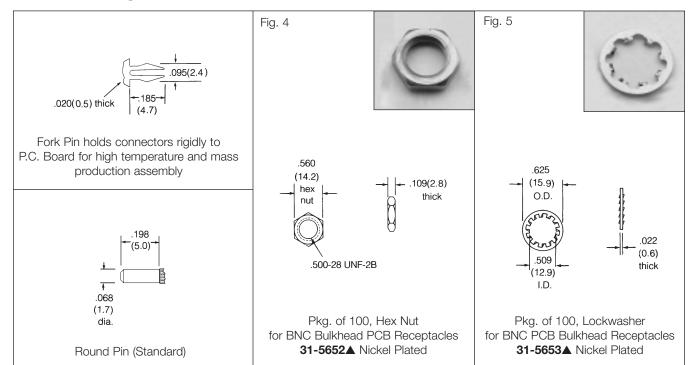

BNC PRINTED CIRCUIT BOARD BULKHEAD RECEPTACLES AND ACCESSORIES

Description	Terminal Type	Dimensions, inches (millimeters)			Notes		Mtg.	Notes	MTG.		Amphenol	Fig.
		а	b	е	Plt.	Ins.	Hole	Notes	Pin Type	Imp	Number	rig.
		1.40(35.6)	.810(20.6)	.250(6.4)	P26	D17	R/P	Iso. White Housing	Round	50Ω	31-5431	
Standard Height					P26	D17			Fork	50Ω	31-5431-1010	
Printed Circuit	Blunt Posts				P26	D20	R/P	Iso. Black Housing	Round	50Ω	31-5538	1
Angle Bulkhead Receptacle (J)☆	for Signal & Ground				P26	D20			Fork	50Ω	31-5538-1010	
					P25	D20			Stamp	50Ω	31-5538-10RFX	1
					P26	D22	R/P	Metal Housing	Round	50Ω	31-5640	
					P26	D22			Fork	50Ω	31-5640-1010	
					P25	D17	R/P	Iso. White Housing	Fork	50Ω	31-5431-10RFX	1
Low Profile Printed Circuit Angle Bulkhead Receptacle (J)☆ Blunt Posts for Signal & Ground		1.40(35.6)	.810(20.6)	.250(6.4)	P26	D17	R/P	Iso. White Housing	Round	50Ω	31-5486	
					P26	D17			Fork	50Ω	31-5486-1010	
					P26	D20	R/P	Iso. Black Housing	Round	50Ω	31-5540	2
	_				P26	D20			Fork	50Ω	31-5540-1010	
	& Ground				P26	D22	R/P	Metal Housing	Round	50Ω	31-5637	
Vertical Printed Circuit Bulkhead Receptacle (J)☆	Blunt Posts for Signal & Ground	1.40(35.6)	.810(20.6)	.250(6.4)	P26	D17	V/P	Iso. White Housing	Round	50Ω	31-5493	
					P26	D17			Fork	50Ω	31-5493-1010	
					P26	D20	V/P	Iso. Black Housing	Round	50Ω	31-5539	3
					P26	D20			Fork	50Ω	31-5539-1010	
					P26	D22	V/P	Metal Hausing	Round	50Ω	31-5633	
					P26	D22	V/P	Ivietal Housing	Housing Fork 50Ω 31-5633-1010			
					P25	D13	R/P	Iso. White Housing	Fork	50Ω	31-5486-10RFX	2
	<u> </u>				P25	D20	R/P	Iso. Black Housing	Fork	50Ω	31-5540-10RFX	2
Hex Nut for BNC Bulkhead PCB Receptacles, Package of 100 ea.					P3	_	_	Nickel Plated	_	_	31-5652	4
Lockwasher for BNC Bulkhead PCB Receptacles, Package of 100 ea.					P3	_	_	Nickel Plated	_	_	31-5653	5

 $[\]upphi$ Jam nuts and lockwashers sold separately. See Figs. 4 & 5 $~ \blacktriangle$ distributor stocked