
// generative instrument

Absu_OS

diceFriend / quick start

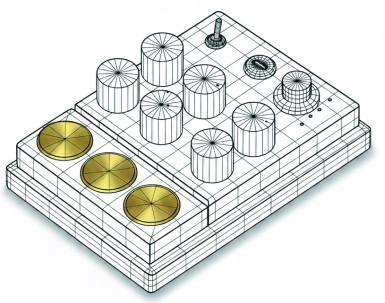

Autonomous drums, bass, chords and a micro-sampler that tears its own output into fragments.

START: USB-C power + 3.5 mm stereo audio out. Connect to a mixer or speakers; begin with the listening level low.

AS: evolving groove and self-sampling. **TS:** three performance layers with escalating holds.

T1: drums. **T2:** bass / chords. **T3:** memory / glitch. In TS, holds build repeated events, register jumps and cross-layer leakage.

// KNOBS / AS

P	NORMAL	SHIFT
1	Tempo: 42-200 BPM	Mutation rate
2	Density	Glitch / ratchets
3	Instability	Micro length / rate
4	Cycle / gear	Pitch / scale range
5	Percussion > tonal	Macro events
6	Space / mix	Degrade / reverse

// KNOBS / TS

P	NORMAL	SHIFT
1	Bass / chord pitch	Mutation rate
2	Held-event density	Glitch / ratchets
3	Escalation	Micro length / rate
4	Register range	Pitch / scale range
5	Percussion > tonal	Macro events
6	Space / mix	Degrade / reverse

SHIFT: up = second layer; down = normal. **Pickup:** After changing layers or using DICE, move a knob to take control of its stored value.

// DICE / SHIFT

Tap DICE: new rhythmic organism. **SHIFT + tap:** more extreme variation. **DICE 1.8 s:** AS / TS. **SHIFT + DICE 10 s:** bootloader.

// CV IN

CV1: trigger / clock and MIDI note / Clock output.
CV2: continuous modulation, CC74 / pressure; not a second clock.
Banana: 0-9 V; common GND.

// USB MIDI

IN: channel 1 notes, transport and 24 PPQN Clock.
OUT: local notes, internal / CV Clock and CV2 messages. Incoming USB is not echoed. **Panel:** CC20-25 = normal P1-P6; CC26-31 = SHIFT P1-P6.

Start with Density, Instability and Balance near halfway. Add SHIFT P2 Glitch and a short micro-fragment. Macro Void creates a deliberate brief silence.
