
// generative instrument

Chimera_OS

diceFriend / quick start

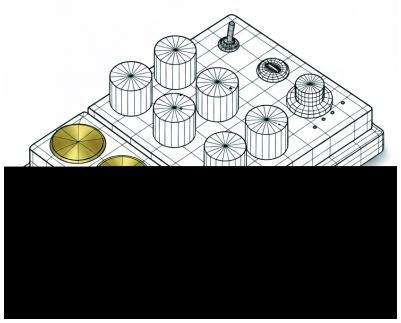

Runglers, FM/PM, pulsars and low-pass gates share a cybernetic sound organism.

START: USB-C power + 3.5 mm stereo audio out. Connect to a mixer or speakers; begin with the listening level low.

AS: one organism, with one event per 2-5 source steps. **TS:** three independent voices without that divider.

AS: T1 Freeze / T2 Invert / T3 Rupture; new touches strike. **TS:** each pad gates its own voice.

// KNOBS / AS

P	NORMAL	SHIFT
1	Root pitch	Coupling / feedback
2	Modulator ratio	Memory time
3	Ecology: osc > pulsar	Mutation
4	Fold	LPG decay
5	Aperture / LPG brightness	Homeostasis
6	Density / base clock	Space

// KNOBS / TS

P	NORMAL	SHIFT
1	T1 pitch	Coupling
2	T2 pitch	Memory
3	T3 pitch	Mutation
4	T1 decay	Fold
5	T2 decay	Aperture
6	T3 decay	Space

SHIFT: up = second layer; down = normal. **Pickup:** After changing layers or using DICE, move a knob to take control of its stored value.

// DICE / SHIFT

Tap DICE: randomize all 12 active-mode parameters and strike. **SHIFT + tap:** reset / resume without panel randomization. **DICE 3 s:** AS / TS. **SHIFT + DICE 10 s:** bootloader.

// CV IN

CV1: edge triggers. **CV2:** pitch modulation and edges. AS divides CV events 2-5; TS triggers successive voices directly.
Banana: 0-9 V; common GND.

// USB MIDI

IN: channel 1 notes and Clock; AS divides events 2-5. CC120 stops; CC123 releases / resets. **OUT:** local notes, CV2 CC74 and panel CC. **Panel:** CC20-25 = normal P1-P6; CC26-31 = SHIFT P1-P6.

Start with low Density and modest Coupling. Incoming MIDI Clock disables local Clock Out until a local short DICE; release pads after Stop before playing again.