


V-Tune

User Guide

A precision strobe tuner for handpans
and other multi-modal instruments.

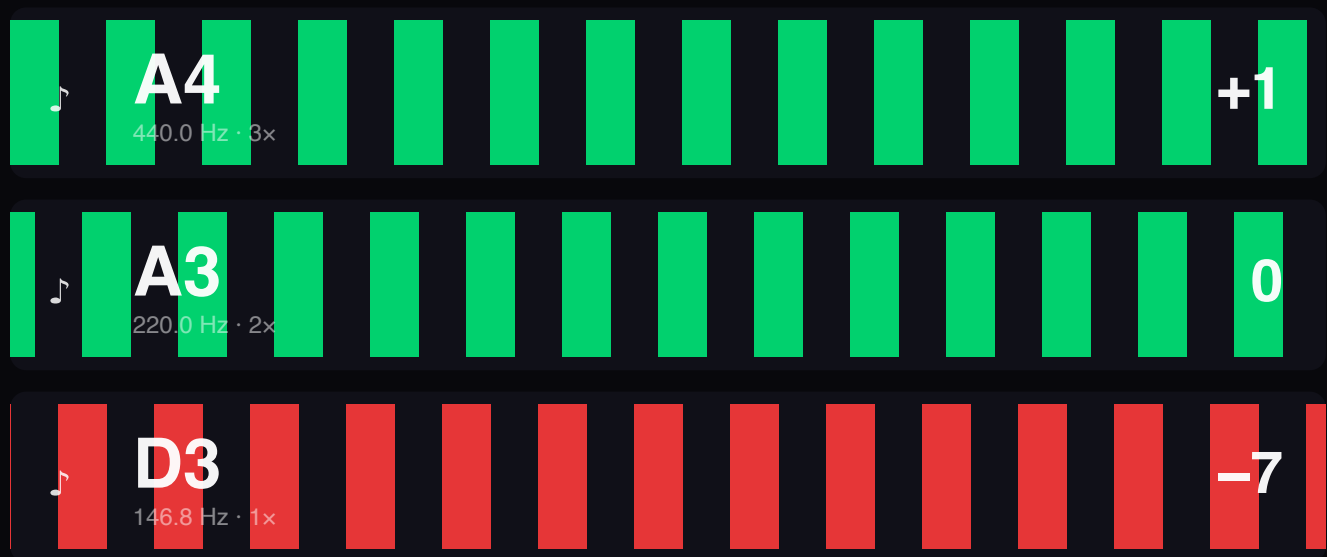

The three-band strobe display — still + green when locked, drifting + red when out of tune.

Contents

1. Welcome	What V-Tune is and who it's for
2. Quick start	Strike a note. Watch it lock in. Done.
3. The strobe display	Bands, bars, colours, cents readout
4. The pitch pipe (J)	Per-band reference tones, three click states
5. The pitch wheel	Chromatic and scale modes
6. Mobile Quick-Pitch bar	The pitch wheel on phones / tablets
7. Spectrum Analyser + ISO	See the full spectrum, isolate frequencies
8. Settings	Every knob, what it does
9. Stopwatch	Time your tuning sessions
10. Theme, notation, tour	Light/dark, $\sharp/\flat$ /Do/DE, re-run onboarding
11. Tips & troubleshooting	Things to try if something feels off

1. Welcome

What V-Tune is and why it exists

V-Tune is a precision strobe tuner built for handpans and other multi-modal instruments — drums, gongs, bells, anything where a single strike excites several pitches at once. Most chromatic tuners give up on these instruments because they're built around one fundamental. V-Tune is built around three: a fundamental, an octave, and an octave-plus-fifth (the 12th), all rendered as independent strobe bands so you can read every partial without them fighting each other.

Under the hood, V-Tune uses FFT peak detection plus phase-rate Goertzel analysis — the FFT tells you which frequencies are loud, the Goertzel measures how stable each one is, frame to frame. You see the result as classic strobe-pattern bars: motion = drift, still = locked.

This guide walks through every part of the app. It's short — V-Tune is a small tool, and the parts that exist exist for a reason. Read it once, then keep tuning.

2. Quick start

From cold app to tuned note in about a minute

1. Grant microphone access

On first launch V-Tune asks for the mic. Allow it. You can change device later in Settings Input.

2. Pick a note

In **Tuning / Scale** tap the note layout to choose your fundamental. Use **OCT -** / **OCT +** to set the octave. The three foundation strobe bands (1x, 2x, 3x) update instantly.

3. Press **Let's Go**

Audio starts. Strike your instrument. The bars freeze when you're in tune; they drift left when you're flat, right when you're sharp.

4. Read the cents number on the right of each band

White digits = in tune (within $\pm 5\text{¢}$ by default). Grey digits = out of tune. The big number is exactly how many cents off you are.

Sample strobe band — in tune



3. The strobe display

The big black panel — where you actually read the tune

The strobe display is the centre of V-Tune. Each horizontal stripe is one band — a frequency the app is tracking. By default you get three foundation bands stacked top-to-bottom:

- 3x — the 12th (octave + fifth). Top of the stack.
- 2x — the octave.
- 1x — the fundamental. Bottom of the stack.

A thicker cyan separator marks the boundary between foundation bands and any custom bands you add (via the Spectrum Analyser).

Reading a band

Each band shows you five things at a glance:

- 🎵 icon (far left) — the per-band pitch pipe. See section 4.
- Note label — e.g. “D3”. The note this band is tuned to.
- Frequency — the exact target in Hz, under the note label.
- Strobe bars — the moving red/green pattern. Motion direction tells you sharp vs flat.
- Cents readout (far right) — the deviation in cents, signed. White when in tune, grey otherwise.

Colours, and what they mean

 In tune (within $\pm 5\text{c}$)	 Out of tune
 Selected band	 🎵 Pipe — continuous tone
 🎵 Pipe — beep mode / detected note	 Scale "ding" highlight

Motion = drift

Bars moving left your input is flat (pitch too low). Tune up. Bars moving right your input is sharp (pitch too high). Tune down. Bars holding still you're locked. The whole band turns green and the cents readout goes white.

Bar sharpness also matters: when the pitch is unstable (during the attack transient of a strike, or with very noisy input), the bars feather and blur. As the note settles they sharpen up. This is configurable via Settings Softness.

Peak hold + decay

V-Tune holds the strobe pattern for ~4 seconds after each strike, then fades it out over a second. This means you can let the note die away and still read the tune from the held pattern — no need to keep re-striking. A louder hit resets the hold timer.

Reordering bands

Custom bands (anything below the cyan separator) can be re-ordered by long-pressing and dragging them up or down. Foundation bands — the 1x, 2x, 3x set — are fixed and can't be moved.

4. The pitch pipe (🎵)

A reference tone for every band, three clicks deep

Each strobe band has a 🎵 icon on its left edge. Click it to hear the band's exact target frequency. Click again

🎵	Off	Silent. The default state.
🎵	Tone	Continuous sine reference. Plays the band's frequency forever (until you click again). Useful for hum-along tuning.
🎵	Beep	Silent until the band detects a strike — then it fires a brief reference beep at the target frequency. So as you tune each strike triggers a comparison tone you can match against. This is the LinoTune-style mode.

Clicking the 🎵 icon on a different band moves the pipe to that band — same mode, new frequency. Only one band can be piping at a time. To stop completely, click the active band's 🎵 until it cycles back to Off.

5. The pitch wheel

Where you tell V-Tune which note to listen for

On desktop and tablet the pitch wheel lives inside the Tuning / Scale accordion in the side panel. On phones it becomes the Quick-Pitch bar at the bottom of the screen (see section 6). It has two modes:

Chromatic mode

A piano-keyboard layout — 7 naturals + 5 sharps. Tap any key to tune to that note in the current octave. Use the OCT – / OCT + buttons below to drop or raise the octave. This is the default mode on launch.

Scale mode

Pick a pre-saved handpan scale (Kurd, Amara, Celtic, etc.) from the SCALE dropdown above the keyboard. The note picker switches from a chromatic keyboard to just the notes in that scale, each with a fixed octave matching the physical instrument. The **ding** (root) is highlighted in purple. Switching scales auto-selects the ding.

Note naming: in scale mode the accidentals follow the scale's convention (Kurd uses flats, Amara uses sharps). In chromatic mode they follow your Settings Notation preference.

Live note indicator

While audio is running, the note V-Tune is currently picking up from the microphone gets a soft cyan glow ring around its button. This is purely informational — it doesn't change which note you're tuning against. Useful for quickly orienting yourself when you strike an unfamiliar partial.

6. Mobile Quick-Pitch bar

The pitch wheel, condensed for thumbs

On phones and narrow tablets the pitch wheel collapses into a sticky bar at the bottom of the screen. It does everything the desktop pitch wheel does — scale dropdown, note selection, octave +/-, start/stop — in a touch-friendly layout that respects the iPhone home-indicator strip.

- SCALE dropdown — same scales as desktop, sits above the note grid.
- Chromatic mode — 3 rows of 4 notes, plus an OCT/Start-Stop row.
- Scale mode — responsive grid of scale notes, each labelled with its octave.
- Let's Go — fills whatever width remains in the bottom row.

Tip: the side menu (burger icon) on mobile hides everything else — accordions, spectrum analyser, settings. Open it when you need them, close it when you want to see the strobe full-screen.

7. Spectrum Analyser & Isolation windows

See the full frequency content, then isolate the bits you care about

Toggle the Spectrum Analyser from the side panel (look for the SA toggle). It opens a frequency-domain view across the audible range — a real-time picture of every harmonic your instrument is producing.

Isolation windows (ISO)

Shift + drag across the spectrum (or touch-hold then drag on mobile) to draw an isolation window — a coloured bracket covering whatever frequency range you select. V-Tune finds the loudest peak inside the bracket and creates a dedicated tuning band for it, rendered beneath the spectrum.

This is how you tune partials that aren't the fundamental, octave, or 12th — say, the third overtone of a particular note. Bracket the peak you care about, let go, and it gets its own strobe band. You can have up to two isolation windows at once; they split the band area 50/50.

8. Settings

Every knob, what it does

Input

Input device	Which microphone V-Tune listens to. Default uses the system mic.
Mic sensitivity	Gain in dB applied before analysis. Bump it up if your input is quiet, drop it if you're clipping.

Strobe feel

Brightness	How bright the red/green strobe bars are. Lower for ambient lighting, higher for stage / sunlight.
Softness	Edge feather on the strobe bars. Sharp when locked, automatically soft when way out of tune. This slider sets the upper bound.
Speed	How fast the strobe pattern reacts. Higher = livelier, lower = calmer / easier to read.

Reading the tune

Tolerance ($\pm$ cents)	How close you have to be before V-Tune calls you in tune. Default is ± 5 cents.
Readout smoothing	How much to smooth the cents number on the right. Higher = steadier digit, slower response.
Display smoothing	Smoothing applied to the strobe motion itself. Independent of readout smoothing.

Analysis

Reference A4	Concert pitch. Default 440 Hz. Set to 442 for some orchestral work, 432 if you're into that.
FFT size	Resolution of the spectrum analyser. Bigger = finer frequency resolution, but slower to update.
FFT smoothing	Time-smoothing on the spectrum display. Higher = calmer trace.
Hum filter	Notches out mains hum at 50 Hz (UK/EU) or 60 Hz (US), plus harmonics. Off by default.

9. Stopwatch

Time your tuning sessions

Open the Stopwatch accordion from the side panel for a simple running timer. Start, pause, reset. Unlike the other accordions, the stopwatch does not auto-close after 10 seconds of non-interaction — a running timer disappearing would be rude.

On desktop, no accordion auto-closes at all (you have the screen real estate, no reason to hide them). The 10-second auto-close only applies on mobile and tablet, where the side panel covers the strobe.

10. Theme, notation, and onboarding tour

A few preferences worth knowing about

Light / dark theme

Toggle from the header. Dark is the default and what this guide matches; light is well-tested but mostly useful in very bright environments.

Notation

Pick how accidentals are labelled in Settings. Notation: ♯ sharps, ♭ flats, Do solfège, or DE German naming (which uses H for B and B for B $\flat$).

Re-running the onboarding tour

The first-launch tour walks you through every UI element by spotlighting it and asking you to interact. If you skipped it or just want a refresher, hit Show tour again at the bottom of the Settings accordion.

Press Esc or click the × to skip at any time — your scale and selection get restored. Complete the tour by pressing **Let's Go** on the last step and V-Tune leaves you on a clean canvas: spectrum analyser closed, isolation windows cleared, accordions collapsed

11. Tips & troubleshooting

Things to try if something feels off

“The bars are jittery / never lock.”

Background noise is usually the culprit. Try (a) lowering mic sensitivity until just your strikes register, (b) enabling the hum filter at your local mains frequency (50 Hz UK/EU, 60 Hz US), (c) bumping readout smoothing up a notch.

“The cents number is right but the strobe disagrees.”

They're measuring different things. The cents number is a median-filtered, EMA-smoothed reading designed to be a stable digit you can read. The strobe is raw phase rate — it shows instantaneous motion. Trust the strobe for fine adjustments; trust the cents number for the overall verdict.

“It’s telling me I’m in tune but I’m clearly not.”

Check Settings Reference A4. If it's set to something exotic (442, 432) you'll be tuning against a different concert pitch. Also check you're on the right note — handpans have rich overtones, and it's easy to accidentally lock onto a partial that isn't the fundamental. The live note indicator on the pitch wheel (cyan glow) helps catch this.

“The strobe is too lively / too sluggish.”

Settings Speed is your friend. Drop it for a calmer reading, raise it for a more responsive one. Pair with display smoothing for fine control.

“I want to tune a partial that isn't 1x, 2x, or 3x.”

Turn on the Spectrum Analyser, find the peak you care about, and shift+drag (or touch-hold drag on mobile) a bracket around it. V-Tune will generate a dedicated strobe band for that partial.

“My phone screen has a notch / home indicator.”

Handled — V-Tune respects iOS safe-area insets on the header, the Quick-Pitch bar, and the side drawer. The strobe never hides behind the notch or the home-indicator strip.

That's the whole app. Strike a note, watch it lock in.