

Piecewise Linear Approach for Solving Nonlinear Dynamic Systems


*Liming Dai, PhD, P.Eng, ASME Fellow
Professor of Industrial Systems Engineering
University of Regina
Regina, Saskatchewan, Canada, S4S 0A2
Phone: (306)585-4498 , Fax: (306)585-4855
E-mail: liming.dai@uregina.ca
Webpage: uregina.ca/~dailimli/*

Regina, Saskatchewan, Canada



Dr. L. Dai, UofR

University of Regina

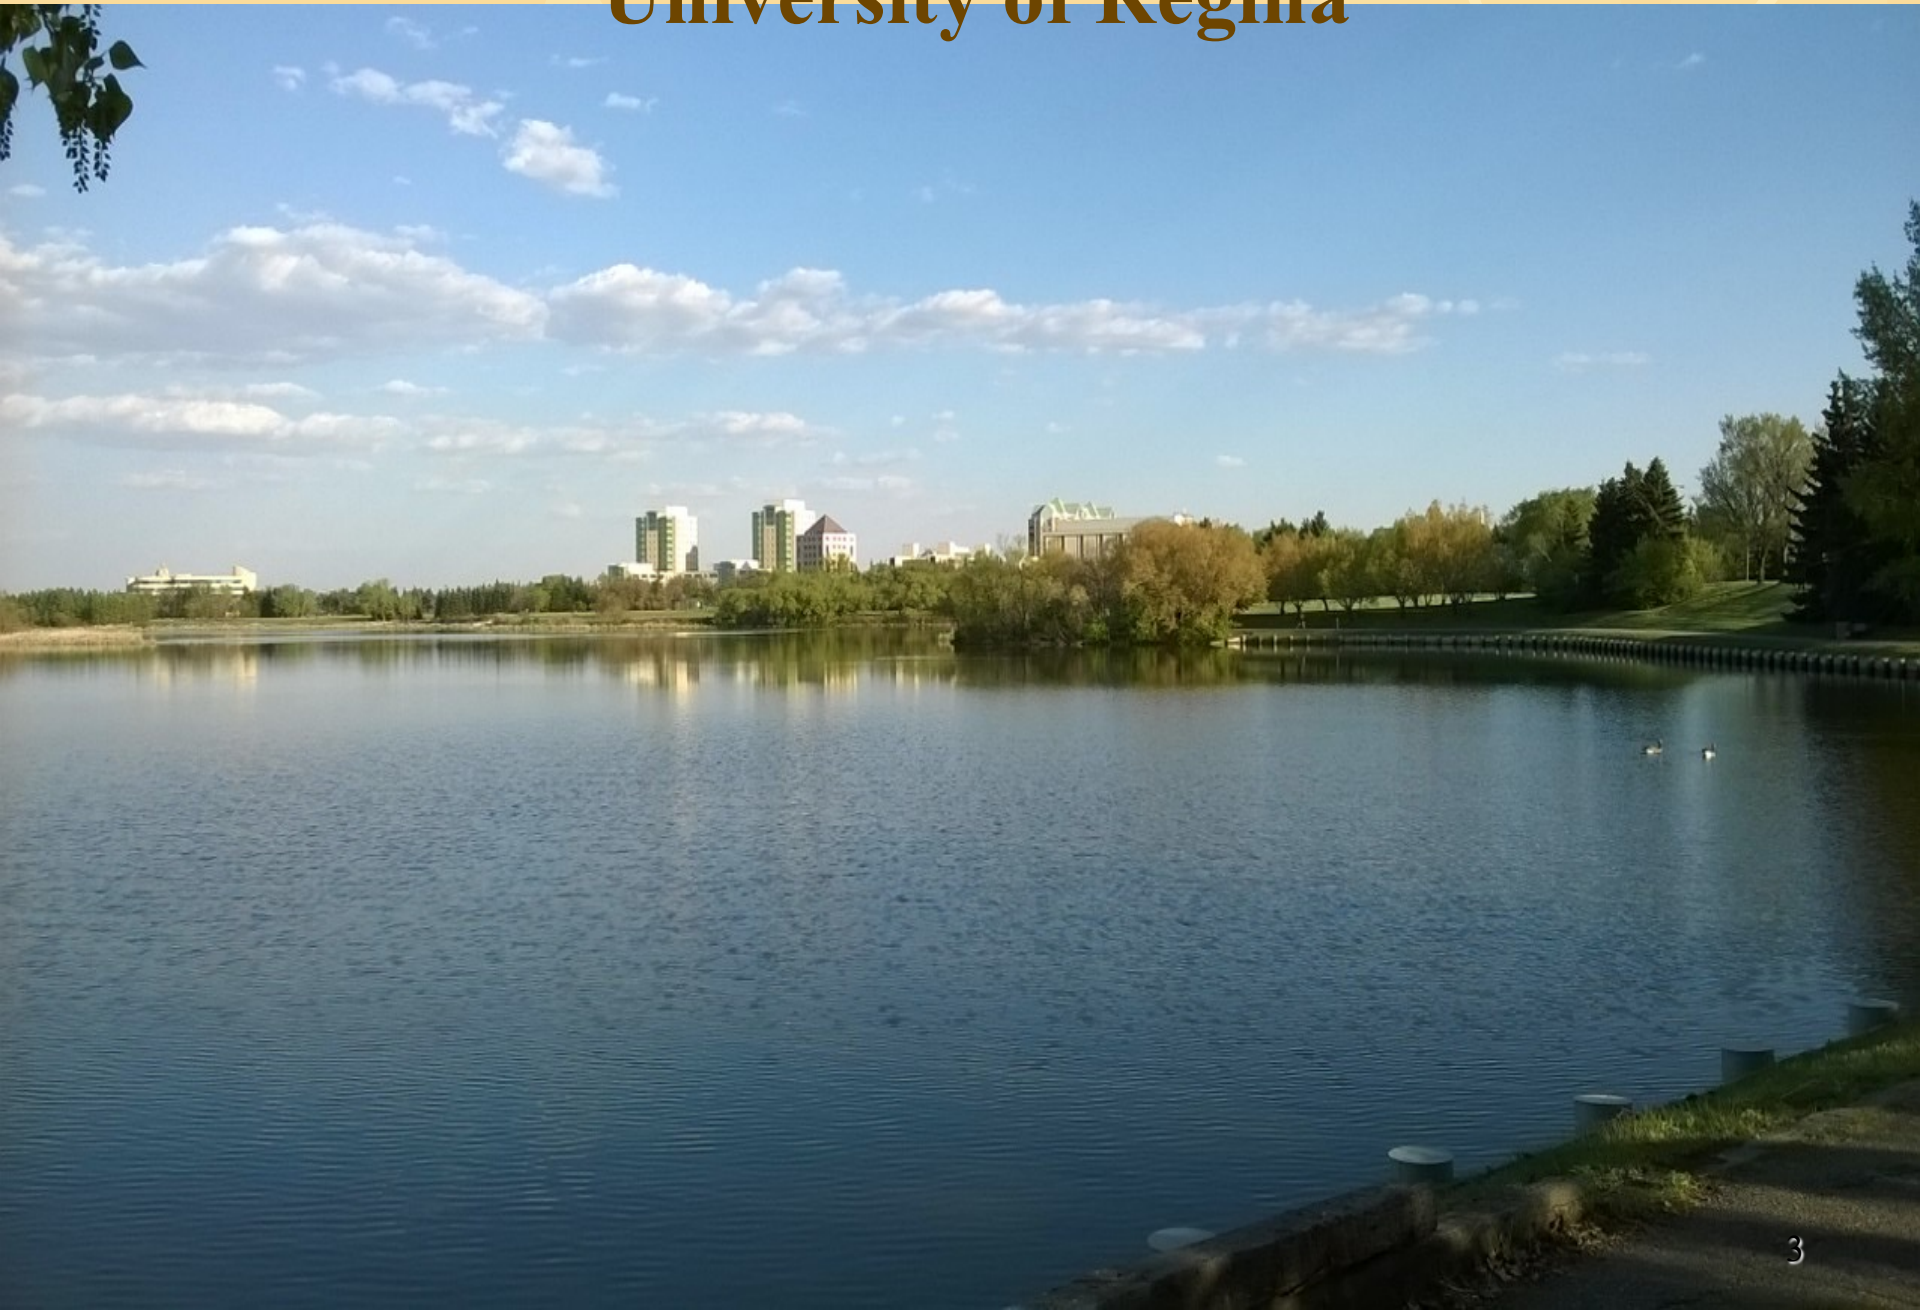

Linear and Nonlinear Systems

- Nonlinear systems in various engineering areas
- Linearization and simplifications and nonlinear systems
 - Constitutive relations
 - Friction
 - Thermal extension
 - Governing equations of dynamics

Solving nonlinear dynamics problems

- Analytical solution attempts
- Semi-analytical solutions
- Approximate solutions
- Numerical solutions

Physical and mathematical modeling of piecewise linear systems

$$\frac{dy}{dx} = f([x])$$

$$\frac{d^n y}{dx^n} = g([x])$$

Discrete and piecewise constant

Governing equations of dynamic systems

Continuous systems

$$\ddot{x} + 2c\dot{x} + \omega^2 x = \varphi(t) + \psi(t, x, \dot{x})$$

PC/PL dynamic systems

$$m\ddot{x} + c\dot{x} + kx = f(x([t]))$$

Solution $x(t)$ satisfies the following conditions

- the displacement $x(t)$ and its derivative are continuous over the time domain;
- the derivative of the displacement exists at each point, with the possible exception at the integer points at which left-hand side derivatives exist;
- the solution satisfies equation on each time $n \leq t < n + 1$ interval, where n is an integer point in the domain.

Solution of damped spring-mass system

$$m\ddot{x} + c\dot{x} + kx = Ax([t])$$

In an arbitrary interval $n \leq t < n+1$ the general solution

$$x_n(t) = e^{-\theta(t-[t])} \left\{ \begin{aligned} & d_n \left(1 - \frac{A}{k}\right) \cos(\xi t - \xi[t]) \\ & + \frac{1}{\xi} \left[v_n + \theta d_n \left(1 - \frac{A}{k}\right) \right] \sin(\xi t - \xi[t]) \end{aligned} \right\} + \frac{A}{k} d_n$$

in which

$$\theta = \frac{c}{2m}$$

$$\xi = \left(\frac{k}{m} - \frac{c^2}{4m^2} \right)^{\frac{1}{2}}$$

$$\frac{k}{m} > \frac{c^2}{4m^2}$$

Conditions of continuity

$$x_n(n) = x_{n-1}(n)$$

and

$$\dot{x}_n(n) = \dot{x}_{n-1}(n)$$

Solution in an interval

$$\begin{bmatrix} d_n \\ v_n \end{bmatrix} = e^{-\theta t} \times$$

$$\begin{bmatrix} (1 - A/k)[\cos \xi + (\theta \sin \xi)/\xi] + (Ae^\theta)/k & \sin \xi / \xi \\ -(1 - A/k)[(\theta^2 / \xi + \xi) \sin \xi & \cos \xi - (\theta \sin \xi)/\xi \end{bmatrix} \begin{bmatrix} d_{n-1} \\ v_{n-1} \end{bmatrix}$$

$$n \leq t < n + 1$$

Complete solution

$$x(t) = \left\{ \begin{array}{l} (1 - \frac{A}{k})[\cos(\xi t - \xi[t])] \\ + \frac{\theta}{\xi} \sin(\xi t - \xi[t]) \end{array} \right\} + \frac{A}{k} e^{\theta(t-[t])} \frac{1}{\xi} \sin(\xi t - \xi[t]) \Bigg\} D_1$$

$$D_1 = e^{-\theta t} \left[\begin{array}{l} (1 - A/k)[\cos \xi + (\theta \sin \xi) / \xi] \\ + (Ae^\theta) / k \\ -(1 - A/k)[(\theta^2 / \xi + \xi) \sin \xi] \end{array} \right] \left[\begin{array}{l} \sin \omega / \omega \\ \cos \xi - (\theta \sin \xi) / \xi \end{array} \right]^{[t]} \left[\begin{array}{l} d_0 \\ v_0 \end{array} \right]$$

Solving linear dynamics problems

Introduction

$$[Nt] / N$$

Proof

$$\lim_{N \rightarrow \infty} \frac{[Nt]}{N} = t$$

Existence and uniqueness of solution

Solving linear dynamics problems

Implementation of PC argument: Analytical Solutions of linear dynamic systems

$$\ddot{x}(t) + \omega^2 x(t) = 0$$

Corresponding PL system

$$\ddot{X}_i(t) + \omega^2 X_i\left(\frac{i}{N}\right) = 0$$

$$i / N \leq t < (i + 1) / N, \quad i = 0, 1, 2, 3, \dots, [Nt]$$

Solving linear dynamics problems

Solution of PL system

$$X(t) = \begin{bmatrix} 1 - \frac{\omega^2}{2} \left(t - \frac{[Nt]}{N} \right)^2 & t - \frac{[Nt]}{N} \end{bmatrix} \begin{bmatrix} 1 - \omega^2 / 2N^2 & 1/N \\ -\omega^2 / N^2 & 1 \end{bmatrix}^{[Nt]} \begin{bmatrix} d_0 \\ v_0 \end{bmatrix}$$

Let

$$\mathbf{Q} = \begin{bmatrix} 1 - \frac{\omega^2}{2N^2} & \frac{1}{N} \\ -\frac{\omega^2}{N} & 1 \end{bmatrix}$$

Solving linear dynamics problems

$$\mathbf{Q} = \mathbf{E}\mathbf{D}\mathbf{E}^{-1}$$

where $\mathbf{E}$ is a set of linearly independent eigenvectors of $\mathbf{Q}$ and $\mathbf{D}$ a diagonal matrix of the eigenvalues of $\mathbf{Q}$

$$\mathbf{Q}^{[Nt]} = \mathbf{E}\mathbf{D}^{[Nt]}\mathbf{E}^{-1} = \mathbf{E} \begin{bmatrix} \phi_1 & 0 \\ 0 & \phi_2 \end{bmatrix}^{[Nt]} \mathbf{E}^{-1} = \mathbf{E} \begin{bmatrix} \phi_1^{[Nt]} & 0 \\ 0 & \phi_2^{[Nt]} \end{bmatrix} \mathbf{E}^{-1}$$

Solving linear dynamics problems

eigenvalues ϕ_1 and ϕ_2

$$\phi_1 = 1 - \frac{\omega^2}{4N^2} + \frac{\omega^2}{4N^2} \left(1 - \frac{16N^2}{\omega^2} \right)^{(1/2)}$$

$$\phi_2 = 1 - \frac{\omega^2}{4N^2} + \frac{\omega^2}{4N^2} \left(1 - \frac{16N^2}{\omega^2} \right)^{(1/2)}$$

$$\mathbf{E} = \begin{bmatrix} \frac{1}{4N} \left[1 - \left(1 - \frac{16N^2}{\omega^2} \right)^{1/2} \right] & \frac{1}{4N} \left[1 + \left(1 - \frac{16N^2}{\omega^2} \right)^{1/2} \right] \\ 1 & 1 \end{bmatrix}$$

Solving linear dynamics problems

Analytical solution of the PL system

$$X(t) = \frac{1}{a_{11} - a_{12}} \begin{bmatrix} b_{11} & b_{12} \end{bmatrix} \mathbf{A} \begin{bmatrix} d_0 \\ v_0 \end{bmatrix}$$

$$b_{11} = 1 - \frac{\omega^2}{2} \left(t - \frac{[Nt]}{N} \right)^2, \quad b_{12} = t - \frac{[Nt]}{N}$$

$$a_{11} = \frac{1}{4N} \left[1 - \left(1 - \frac{16N^2}{\omega^2} \right)^{1/2} \right], \quad a_{12} = \frac{1}{4N} \left[1 + \left(1 - \frac{16N^2}{\omega^2} \right)^{1/2} \right]$$

Solving linear dynamics problems

Useful limit results for $\lim_{N \rightarrow \infty} X(t)$

$$\lim_{N \rightarrow \infty} \phi_1^{[Nt]} = e^{it\omega}$$

$$\lim_{N \rightarrow \infty} \phi_2^{[Nt]} = e^{-it\omega}$$

$$\lim_{N \rightarrow \infty} \frac{a_{11}\phi_1^{[Nt]} - a_{12}\phi_2^{[Nt]}}{a_{11} - a_{12}} = \frac{e^{i\omega t} + e^{-i\omega t}}{2} = \cos(\omega t)$$

$$\lim_{N \rightarrow \infty} \frac{-a_{11}a_{12}\phi_1^{[Nt]} + a_{11}a_{12}\phi_2^{[Nt]}}{a_{11} - a_{12}} = \frac{1}{\omega} \sin(\omega t)$$

Solving linear dynamics problems

Therefore

$$\lim_{N \rightarrow \infty} X(t) = \begin{bmatrix} \cos(\omega t) & \frac{1}{\omega} \sin(\omega t) \\ 0 & 0 \end{bmatrix} \begin{bmatrix} d_0 \\ v_0 \end{bmatrix}$$

i.e.

$$\lim_{N \rightarrow \infty} X(t) = x(t)$$

as expected

Solving linear dynamics problems

Continuous system

$$\ddot{x} + 2n\dot{x} + \omega^2 x = F \cos \Omega t$$

PL system

$$\ddot{X}_i + 2n\dot{X}_i + \omega^2 X_i = F \cos\left(\Omega \frac{i}{N}\right)$$

Solving linear dynamics problems

Solution

$$X(t) = e^{-n\left(t - \frac{[Nt]}{N}\right)} \begin{bmatrix} \cos\left(\xi t - \xi \frac{[Nt]}{N}\right) + \frac{n}{\xi} \sin\left(\xi t - \xi \frac{[Nt]}{N}\right) \\ \frac{1}{\xi} \sin\left(\xi t - \xi \frac{[Nt]}{N}\right) \end{bmatrix} \mathbf{w} \\ + \frac{F}{\omega^2} e^{-n\left(t - \frac{[Nt]}{N}\right)} \begin{bmatrix} e^{-n\left(t - \frac{[Nt]}{N}\right)} - \cos\left(\xi t - \xi \frac{[Nt]}{N}\right) \\ -\frac{n}{\xi} \sin\left(\xi t - \xi \frac{[Nt]}{N}\right) \end{bmatrix} \cos\left(\Omega \frac{[Nt]}{N}\right)$$

Solving linear dynamics problems

$$\mathbf{W} = e^{-n \frac{[Nt]}{N}} \mathbf{G}^{[Nt]} \begin{bmatrix} c_0 \\ d_0 \end{bmatrix} + \sum_{r=1}^{[Nt]} e^{-\frac{nr}{N}} \mathbf{G}^{r-1} \begin{bmatrix} e^{\frac{n}{N}} - \cos \frac{\xi}{N} - \frac{n}{\xi} \sin \frac{\xi}{N} \\ \left(\frac{n^2}{\xi} + \xi \right) \sin \frac{\xi}{N} \end{bmatrix} \frac{F}{\omega^2} \cos \left[\Omega([Nt] - r) \right]$$

$$\mathbf{G} = \begin{bmatrix} \cos \frac{\xi}{N} + \frac{n}{\xi} \sin \frac{\xi}{N} & \frac{1}{\xi} \sin \frac{\xi}{N} \\ -\left(\frac{n^2}{\xi} + \xi \right) \sin \frac{\xi}{N} & \cos \frac{\xi}{N} - \frac{n}{\xi} \sin \frac{\xi}{N} \end{bmatrix}$$

Solving linear dynamics problems

Therefore

$$\lim_{N \rightarrow \infty} X(t) = e^{-nt} \begin{bmatrix} \cos \xi t + \frac{n}{\xi} \sin \xi t & \frac{1}{\xi} \sin \xi t \end{bmatrix} \begin{bmatrix} d_0 \\ v_0 \end{bmatrix} \\ + \frac{F}{(\omega^2 - \Omega^2)^2 + (2n\Omega)^2} \begin{bmatrix} (\omega^2 - \Omega^2)(\cos \Omega t - e^{-nt} \cos \xi t) \\ + 2n\Omega \sin \Omega t - e^{-nt} (\omega^2 - \Omega^2) \frac{n}{\xi} \sin \xi t \end{bmatrix}$$

Solving nonlinear dynamics problems

- Numerical solutions
 - Taylor series
 - Runge-Kutta method

$$\begin{aligned} y_{n+1} &= y_n + \frac{1}{6} (k_1 + 2k_2 + 2k_3 + k_4), & k_1 &= h f(t_n, y_n), \\ t_{n+1} &= t_n + h & k_2 &= h f\left(t_n + \frac{h}{2}, y_n + \frac{k_1}{2}\right), \\ & & k_3 &= h f\left(t_n + \frac{h}{2}, y_n + \frac{k_2}{2}\right), \\ & & k_4 &= h f(t_n + h, y_n + k_3). \end{aligned}$$

Characteristics of the Existing Numerical Approaches

- Discrete solutions
- Linearization and Taylor expansion $\rightarrow$ truncation with limited terms
- Damaged physical meaning and originality of the system considered

P-T Method for Oscillation Systems

General oscillation system:

$$\ddot{x} + 2c\dot{x} + \omega^2 x = \varphi(t) + \psi(t, x, \dot{x})$$

$\psi(t, x, \dot{x})$ linear or nonlinear function

Piecewise constant argument $[Nt]/N$:

$$\lim_{N \rightarrow \infty} \frac{[Nt]}{N} = t$$

Taylor series expansion

$$\ddot{x}_i + 2c\dot{x}_i + \omega^2 x_i = \varphi_i(t) + \psi_i \\ + \dot{\psi}_i t + \frac{1}{2!} \ddot{\psi}_i t^2 + \cdots + \frac{1}{n!} \psi_i^{(n)} t^n$$

in i th time interval, $[Nt]/N \leq t < ([Nt]+1)/N$.

- Continuous solution in the interval
- Combination of linear systems for $t > 0$

A damped linear oscillatory system,

$$\ddot{x}(t) + 2c\dot{x}(t) + a^2 x(t) = bx(t)$$

$$\ddot{x}_i(t) + 2c\dot{x}_i(t) + a^2 x_i(t) = bd_i + bv_i(t - \frac{[Nt]}{N})$$

Closed form solution:

$$x_i = e^{-c(t - \frac{[Nt]}{N})} \{B_1 \cos[\xi(t - \frac{[Nt]}{N})] + B_2 \sin[\xi(t - \frac{[Nt]}{N})]\} + A_1 + A_2(t - \frac{[Nt]}{N})$$

$$\xi^2 = a^2 - c^2$$

$$A_2 = \frac{1}{a^2}, \quad A_1 = \frac{1}{a^2} (bd_i - 2cA_2)$$

$$B_1 = d_1 - A_1, \quad B_2 = \frac{1}{\xi} (v_i + cB_1 - A_2)$$

Continuity conditions:

$$x_i\left(\frac{[Nt]}{N}\right) = x_{i-1}\left(\frac{[Nt]}{N}\right)$$

$$\dot{x}_i\left(\frac{[Nt]}{N}\right) = \dot{x}_{i-1}\left(\frac{[Nt]}{N}\right).$$

Recurrence relations:

$$d_{i+1} = e^{-\frac{c}{N}} \left(B_1 \cos \frac{\xi}{N} + B_2 \sin \frac{\xi}{N} \right) + A_1 + \frac{A_2}{N}$$

$$\begin{aligned} v_{i+1} = & -ce^{-\frac{c}{N}} \left(B_1 \cos \frac{\xi}{N} + B_2 \sin \frac{\xi}{N} \right) \\ & + e^{-\frac{c}{N}} \left(-\xi B_1 \sin \frac{\xi}{N} + \xi B_2 \cos \frac{\xi}{N} \right) + A_2 \end{aligned}$$

Comparison of the solutions of analytical, P-T and R-K methods:

Taylor expansion of P-T method Solution

$$\begin{aligned}x_i = & d_i + v_i \left(t - \frac{[Nt]}{N}\right) - \left[(a^2 - b) \frac{d_i}{2} + cv_i\right] \left(t - \frac{[Nt]}{N}\right)^2 \\& + \left[\frac{cd_i}{3} (a^2 - b) - \frac{v_i}{6} (a^2 - b - 4c^2)\right] \left(t - \frac{[Nt]}{N}\right)^3 \\& + \left[\frac{d_i}{24} (a^2 - b)(a^2 - 4c^2) \right. \\& \left. + \frac{cv_i}{6} \left(a^2 - \frac{b}{2} - 2c^2\right)\right] \left(t - \frac{[Nt]}{N}\right)^4 + \dots\end{aligned}$$


Exact solution:

$$\begin{aligned}x_i = & d_i + v_i \left(t - \frac{[Nt]}{N}\right) - [(a^2 - b) \frac{d_i}{2} + cv_i] \left(t - \frac{[Nt]}{N}\right)^2 \\& + \left[\frac{cd_i}{3} (a^2 - b) - \frac{v_i}{6} (a^2 - b - 4c^2)\right] \left(t - \frac{[Nt]}{N}\right)^3 \\& + \left[\frac{d_i}{24} (a^2 - b)(a^2 - b - 4c^2) \right. \\& \left. + \frac{cv_i}{6} (a^2 - b - 2c^2)\right] \left(t - \frac{[Nt]}{N}\right)^4 + \dots\end{aligned}$$

Difference is independent of the parameter N .

Solving nonlinear dynamics problems

P-T method vs. Runge-Kutta method

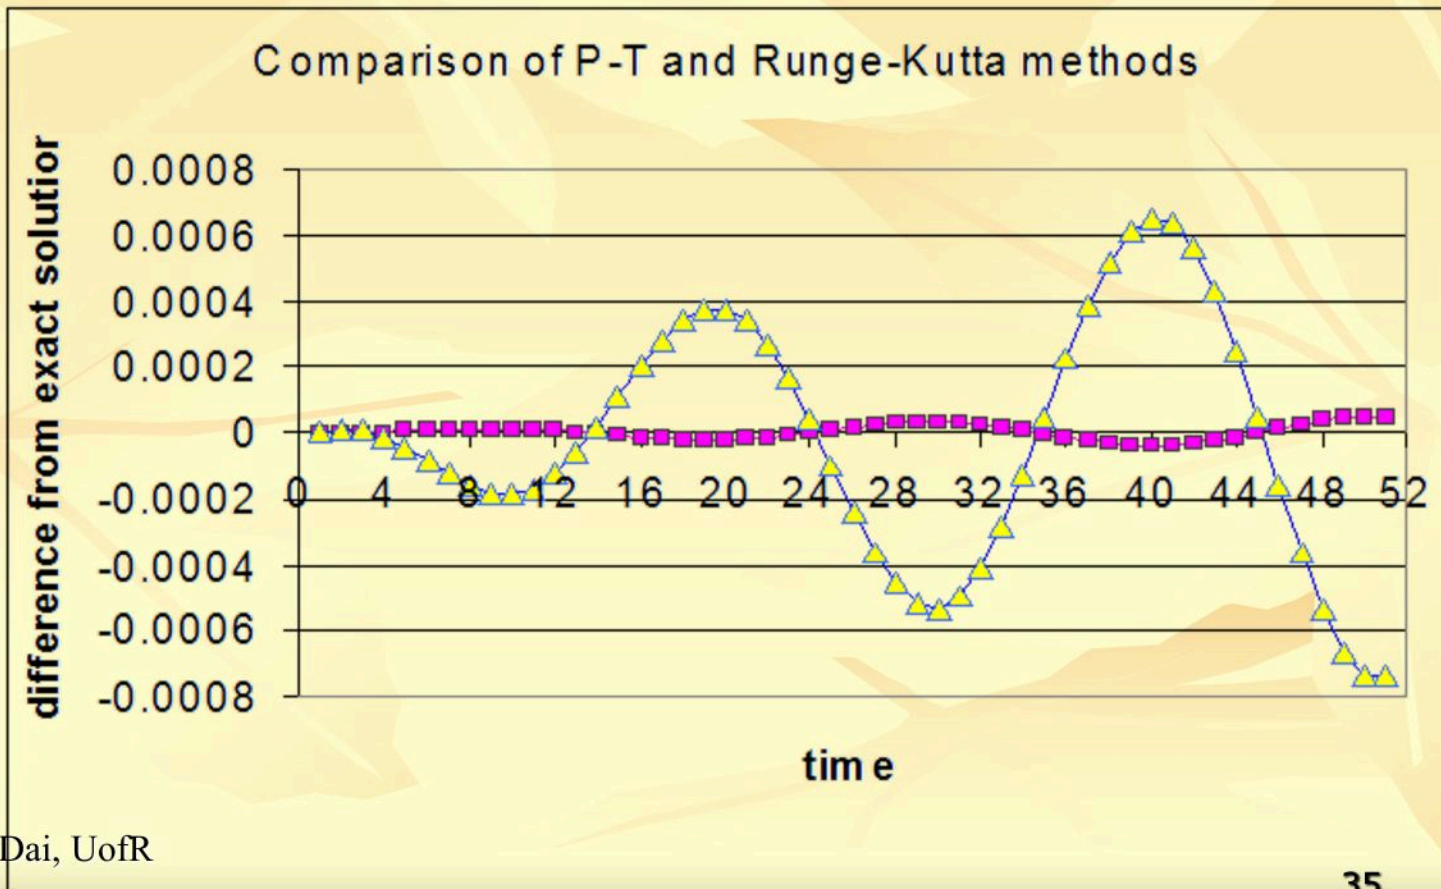


Solving nonlinear dynamics problems

- Numerical solutions
 - P-T method

$$\lim_{N \rightarrow \infty} \frac{[Nt]}{N} = t$$

$$\begin{aligned} \ddot{X}_i + 2c\dot{X}_i + \omega^2 X_i &= \varphi_i(t) + \psi_i \\ &+ \dot{\psi}_i t + \frac{1}{2!} \ddot{\psi}_i t^2 + \cdots + \frac{1}{n!} \psi_i^{(n)} t^n \end{aligned}$$

$$\ddot{x} + 0.2\dot{x} + 10x = x^3$$

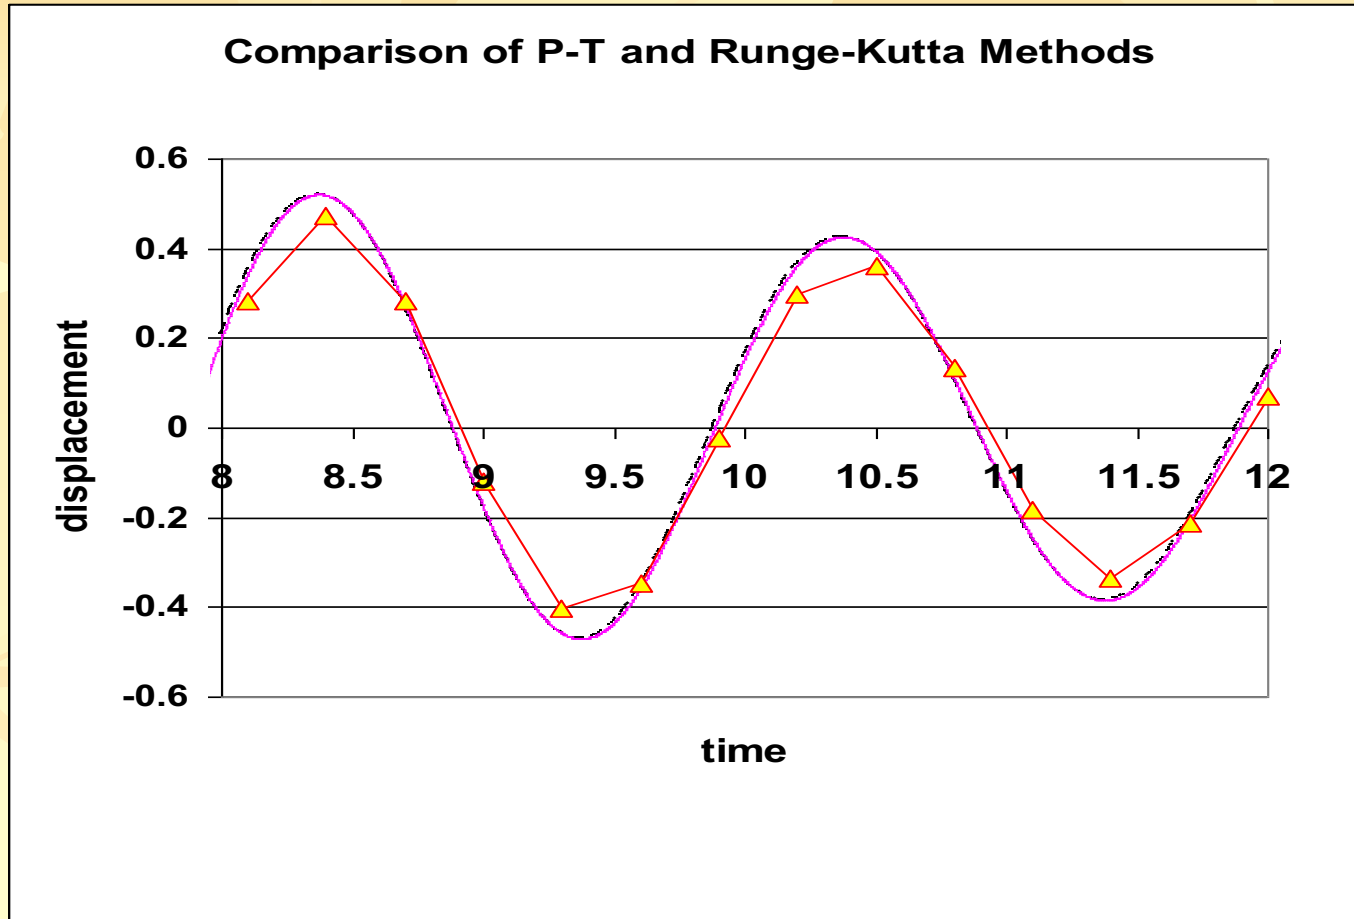

Step length 0.3 P-T/ Runge-Kutta; 0.003 Runge-Kutta

Time	P-T Step 0.3	Runge-Kutta Step 0.3	Runge-Kutta Step 0.003
8.1	0.347724	0.281461	0.343268
8.4	0.517027	0.473953	0.518208
8.7	0.267069	0.28183	0.272421
9.0	-0.18254	-0.1204	-0.17695
9.3	-0.45882	-0.40096	-0.45817
9.6	-0.35455	-0.34717	-0.35839
9.9	0.027678	-0.02265	0.021947
10.2	0.364802	0.298642	0.362458
10.5	0.390918	0.362595	0.393205
10.8	0.1028	0.135726	0.107953
11.1	-0.25117	-0.18411	-0.24755
11.4	-0.3827	-0.33687	-0.38347
11.7	-0.20041	-0.2129	-0.20458
12	0.132724	0.072054	0.128444

Conclusion

- Nonlinear phenomena → more close to reality or nature
- Linearization leads to simplification and may miss responses such as chaos or quasiperiodicity
- Necessity for accurate and reliable analyses
- P-T method produces more accurate and reliable solutions in comparing with that of Runge-Kutta method, with about the same CPU time.

Conclusion

- Fully understand nonlinear systems and their responses eventually rely on analytical solutions
- Nonlinear theories → foundation for further experimental and numerical analyses
- Future of nonlinear dynamics relay on innovative theory, methods of analysis and solutions

References:

- L. Dai, and K. Foroutan, “Nonlinear Stability and Vibration Analyses of Functionally Graded Variable Thickness Toroidal Shell Segments Reinforced with Spiral Stiffeners,” accepted in press at International Journal of Applied Mechanics, 2023.
- L. Dai, and D., “Time series difference approach for evaluating sensitivity of nonlinear dynamic systems,” World Journal of Advanced Engineering Technology and Sciences, DOI: <https://doi.org/10.30574/wjaets.2022.7.1.0107>, Vol. 7, No. 1, pp. 149-160, 2022.
- L. Dai, D. Xia and C. Chen, “An Algorithm for Diagnosing Nonlinear Characteristics of Dynamic Systems with the Integrated Periodicity Ratio and Lyapunov Exponent Methods,” *Communications in Nonlinear Science and Numerical Simulation*, 2019.
- L. Dai and M. C. Singh, A new approach with piecewise constant arguments to approximate and numerical solutions of oscillatory problems, *Journal of Sound and Vibration*, Vol.263, No.3, pp.535-548, 2003.
- Y. Ueda, Steady motions exhibited by Duffing’s equations: A picture book of regular and chaotic motions, in *New Approaches to Nonlinear Problems in Dynamics*, edited by P. J. Holmes ~SIAM, Philadelphia, pp. 311–322, 1980.

Publications in 2023

- Dai, L. and Foroutan, K., “Nonlinear Stability and Vibration Analyses of Functionally Graded Variable Thickness Toroidal Shell Segments Reinforced with Spiral Stiffeners,” accepted in press at *International Journal of Applied Mechanics*, 2023. IF 4.0
- Zhang, Z. and Dai, L., “The application of the cell mapping method in the characteristic diagnosis of nonlinear dynamical systems”, accepted in press at *Nonlinear Dynamics*, 2023. IF 5.7
- Foroutan, K. and Dai, L., “Nonlinear dynamic response and vibration of spiral stiffened FG toroidal shell segments with variable thickness,” accepted in press at *Mechanics Based Design of Structures and Machines*, 2023. IF 4.4
- Foroutan, K. and Dai, L., “Nonlinear vibration and primary resonance of multilayer functionally graded shallow shells with porous core,” accepted in press at *Steel and Composite Structures*, An International Journal, 2023. IF 6.1
- Wang, L., and Dai, L., “Chaotic time series prediction of multi-dimensional nonlinear system based on bidirectional LSTM model”, accepted in press at *Advanced Theory and Simulations*, DOI: 10.1002/adts.202300148, 2023. IF 4.1
- Xia, D., Dai, L. and Lin, L., “Experimental Study on the Effect of Attachments on the Vortex-Induced Vibration of a Centrally Slotted Box Deck,” *Journal of Applied Fluid Mechanics*, <https://doi.org/10.47176/jafm.16.06.1631>, Vol. 16, No. 6, pp. 1119-1133, 2023. IF 2.4
- Foroutan, K., Dai, L., and Zhao, H., “Non-linear parametric vibration of the laminated composite shallow shells including primary and 1:2 internal resonances”, accepted in press at *Mechanics of Advanced Materials and Structures*, 2023. IF 3.3
- Foroutan, K., and Dai, L., “Non-linear hygrothermal analysis of imperfect multilayer functionally graded shallow shell with a porous core”, accepted in press at *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, vol. 45, 151, <https://doi.org/10.1007/s40430-023-04026-y>, 2023. IF 2.4
- Dai, L., and Foroutan, K., “Performance of Nonlinear Energy Sink with a New Mechanism on Energy Dissipation Systems,” 7th Global Energy Meet, Boston, 2023.

Liming Dai · Reza N. Jazar *Editors*


Nonlinear Approaches in Engineering Application

Design Engineering Problems

 Springer

Nonlinear Dynamics of Piecewise Constant Systems

Nonlinear Dynamics of Piecewise Constant Systems and Implementation of Piecewise Constant Arguments

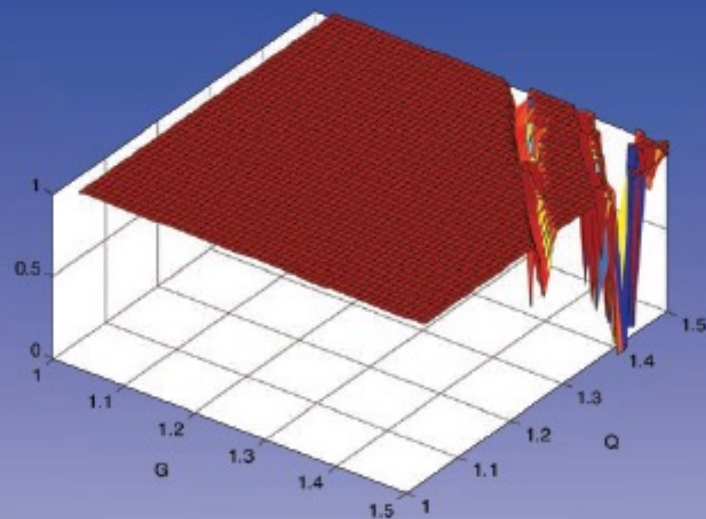

Liming Dai

 World Scientific



University
of Regina

Thank You!