



## GIROS Y DESPLAZAMIENTOS DE VIGAS DE UN SOLO TRAMO

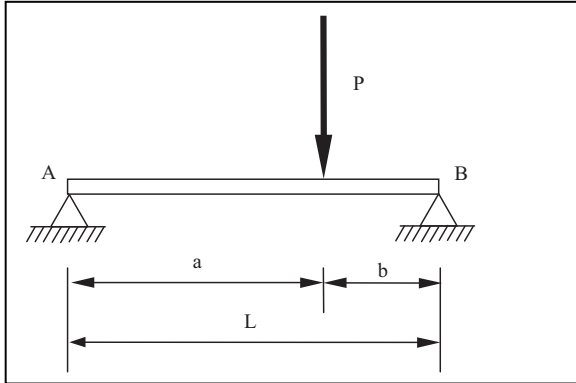


$$\theta_A = \frac{P \cdot a \cdot b}{6 \cdot E \cdot I \cdot L} \cdot (L + b)$$

$$\theta_B = \frac{P \cdot a \cdot b}{6 \cdot E \cdot I \cdot L} \cdot (L + a)$$

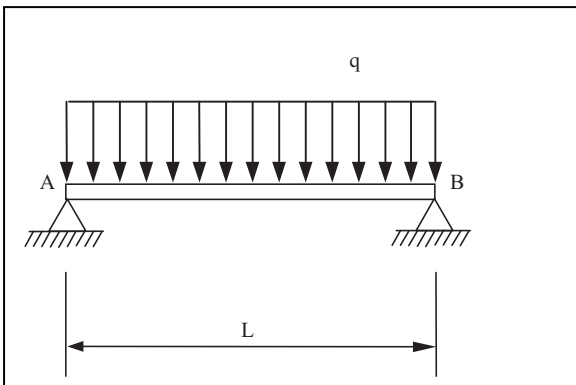


$$\theta_A = \theta_B = \frac{q \cdot L^3}{24 \cdot E \cdot I}$$

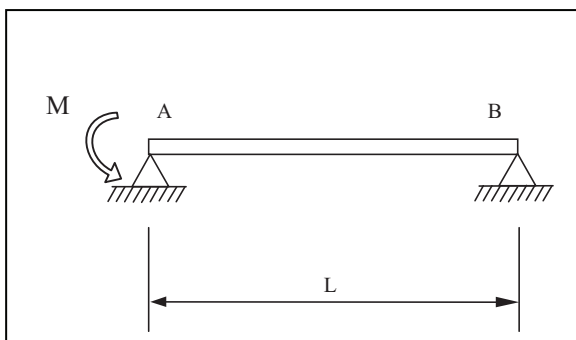


$$\theta_A = \frac{M \cdot L}{3 \cdot E \cdot I}$$

$$\theta_B = \frac{M \cdot L}{6 \cdot E \cdot I}$$

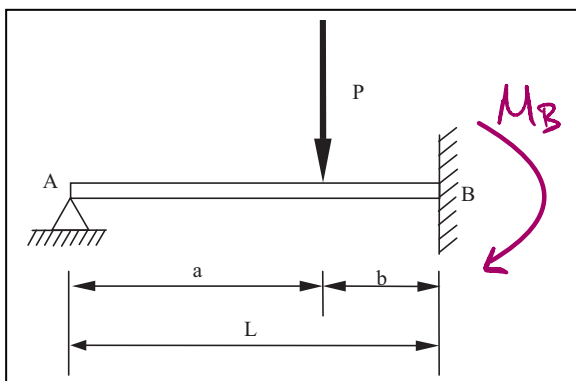


$$\theta_A = \frac{P \cdot a \cdot (L - a)^2}{4 \cdot E \cdot I \cdot L}$$

$$M_B = \frac{P \cdot a}{2 \cdot L^2} (L^2 - a^2)$$

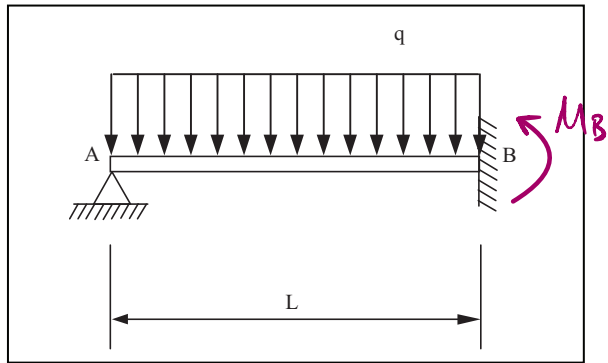


$$M_B = \frac{7L^2}{8}$$

$$\theta_A = \frac{q \cdot L^3}{48 \cdot E \cdot I}$$

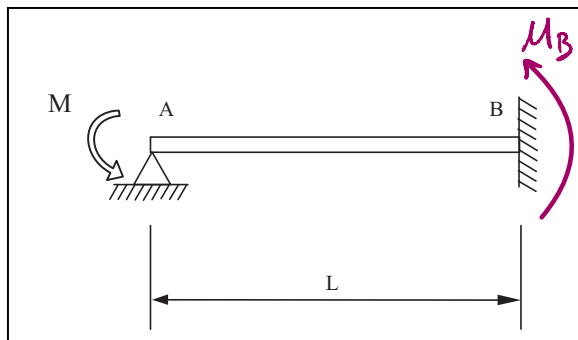


$$M_B = \frac{M}{2}$$

$$\theta_A = \frac{M \cdot L}{4 \cdot E \cdot I}$$

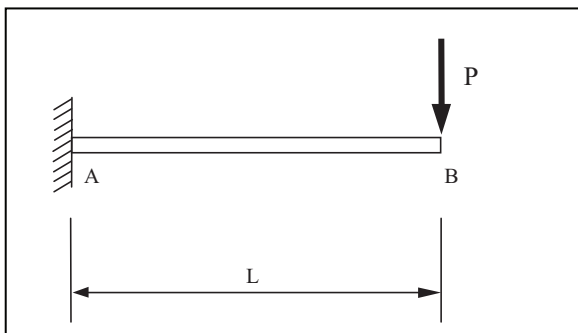


$$f_B = \frac{P \cdot L^3}{3 \cdot E \cdot I}$$

$$\theta_B = \frac{P \cdot L^2}{2 \cdot E \cdot I}$$

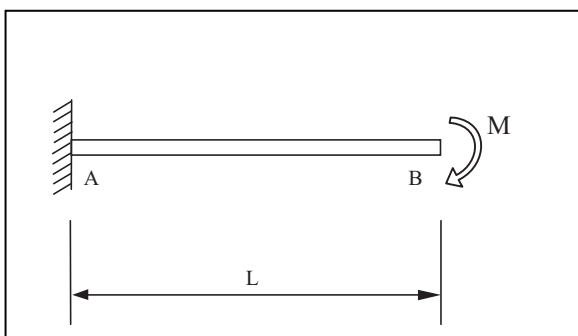

$$f_B = \frac{M \cdot L^2}{2 \cdot E \cdot I}$$

$$\theta_B = \frac{M \cdot L}{E \cdot I}$$

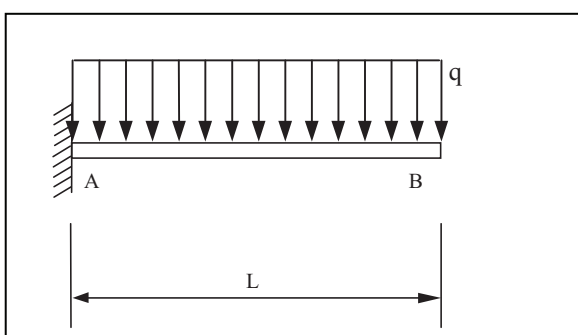

$$f_B = \frac{q \cdot L^4}{8 \cdot E \cdot I}$$

$$\theta_B = \frac{q \cdot L^3}{6 \cdot E \cdot I}$$