
AC410 4K WEBCAM

User Guide

Quick Start | Setup | Video & Audio | Troubleshooting | Support

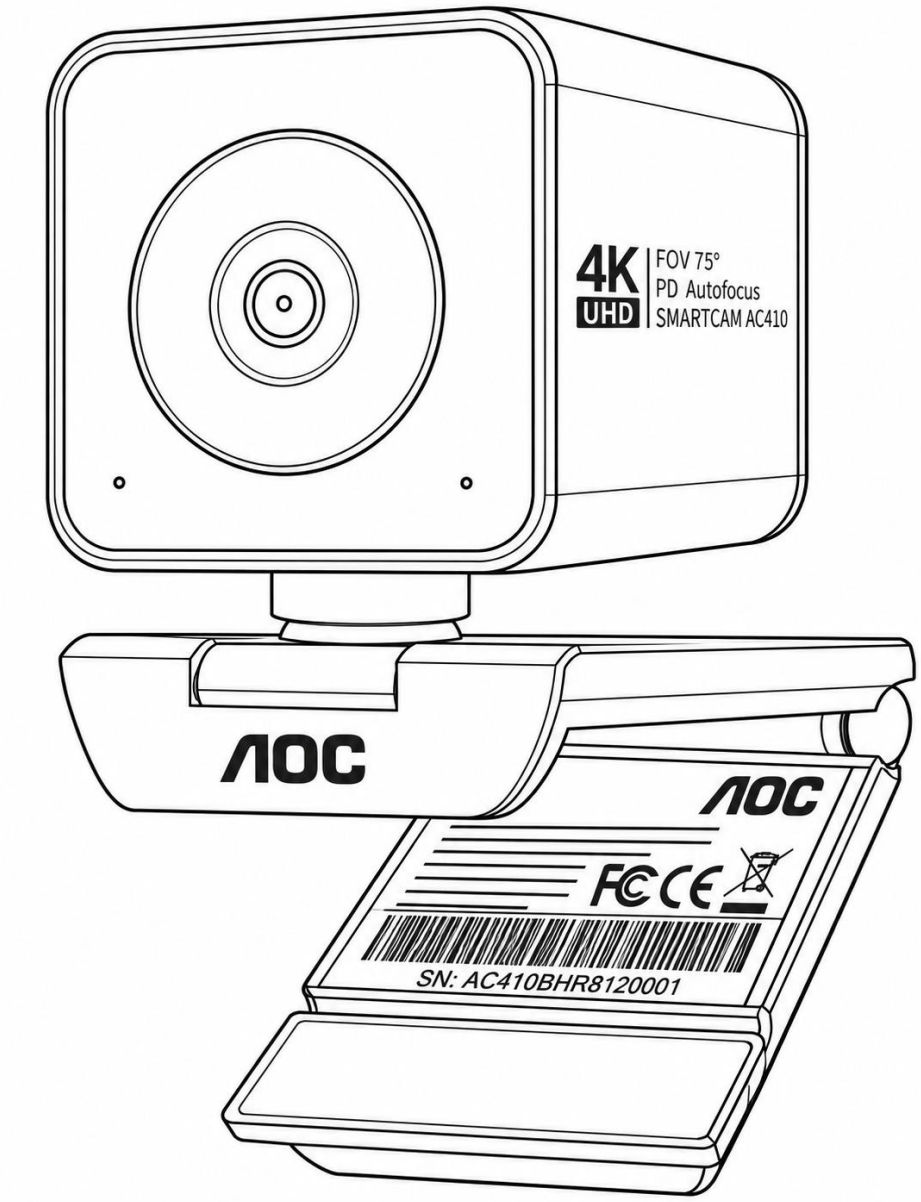

NEED HELP?

Use this guide for installation, USB connection, camera and microphone setup, video settings, compatibility, troubleshooting, care, and product specifications.

Customer Support: aoc-after-sales@customerafter-sales.com

Scan for User Guide

1. Know Your AC410



Product Overview

Product: AOC AC410 4K Webcam
Video: Up to 3840 × 2160 @ 30 fps, 1920 × 1080 @ 60 fps
Field of view: 75°; PDAF autofocus (5 cm to infinity)
Image: Automatic light correction
Audio: Built-in noise-canceling microphone
Privacy: Flip-up privacy cover
Connection: USB-A with supplied USB-A to USB-C adapter
Mounting: Flexible clip/base or 1/4" tripod screw hole (tripod included)

1.1 Quick Start – 3 Steps

1	**Mount the webcam —** Secure the webcam to the top edge of a monitor with its flexible clip, or attach it to the included tripod for tabletop use.
2	**Connect by USB —** Plug the USB-A cable into a compatible USB-A port, or use the included USB-A to USB-C adapter for a USB-C port.
3	**Open and test —** Open the privacy cover, launch a camera app, and select AOC AC410 as the camera and microphone.

1.2 What Is in the Box


Item	Qty	Notes
AC410 Webcam	1	4K webcam with built-in USB-A cable and flexible clip
Tripod	1	Compact tripod for tabletop use
USB-A to USB-C Adapter	1	For compatible USB-C computer ports
User Manual	1	Product instructions

1.3 Main Parts

Part	Function
Camera Lens	Captures up to 4K video with PDAF autofocus
Privacy Cover	Flip-up cover physically blocks the lens
Microphone	Built-in noise-canceling microphone
Power Indicator Light	**Red light:** remains on while the webcam is connected. **Green light:** turns on when the camera is active.
Flexible Clip / Base	Secures the webcam to a monitor
USB-A Cable	Connects directly to a compatible USB-A port
USB-A to USB-C Adapter	Connects the USB-A cable to a compatible USB-C port
1/4" Tripod Screw Hole	Mounts the webcam on the supplied tripod

2. Set Up and Use Your Webcam

2.1 Install on a Monitor

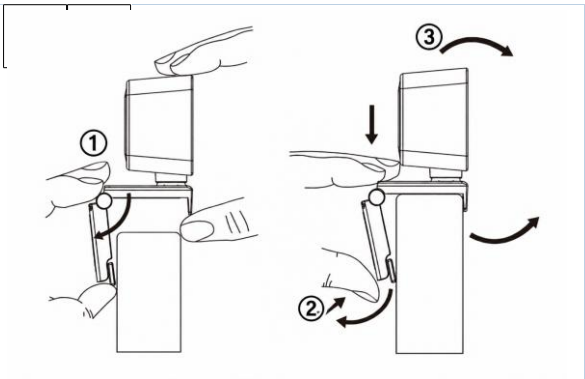


1. Open the mounting clip and place the webcam on the top edge of the monitor.

2. Extend the lower support and press it downward until it rests firmly against the back of the display.

3. Adjust the webcam angle to achieve the desired viewing position.

TIP:
Make sure the mounting clip is firmly secured before use.

2.2 Install on a Tripod

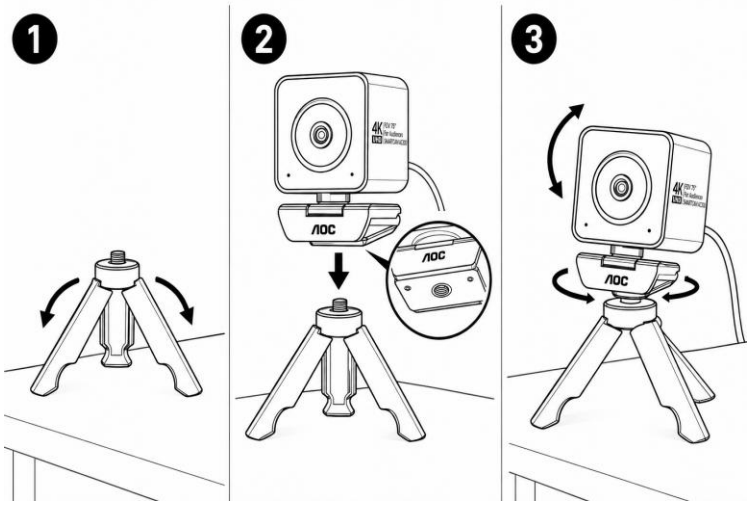


1. Unfold the included tripod and place it on a flat, stable surface.

2. Attach the webcam to the tripod using the 1/4" tripod screw hole.

3. Adjust the webcam angle to achieve the desired viewing position.

TIP:
Make sure the webcam is securely attached and the tripod is stable before use.

2.3 USB-A / USB-C Connection

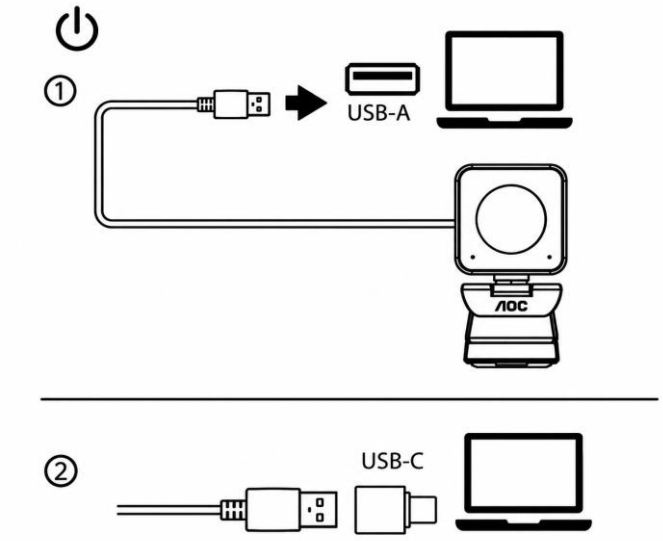


① USB-A Connection
Plug the webcam directly into an available **USB-A port** on your computer.

② USB-C Connection
Connect the webcam to the supplied **USB-A to USB-C adapter**, then plug the adapter into an available **USB-C port**.

NOTE:
Wait a few seconds for the computer to recognize the webcam after connection.

2.4 Use the Privacy Cover

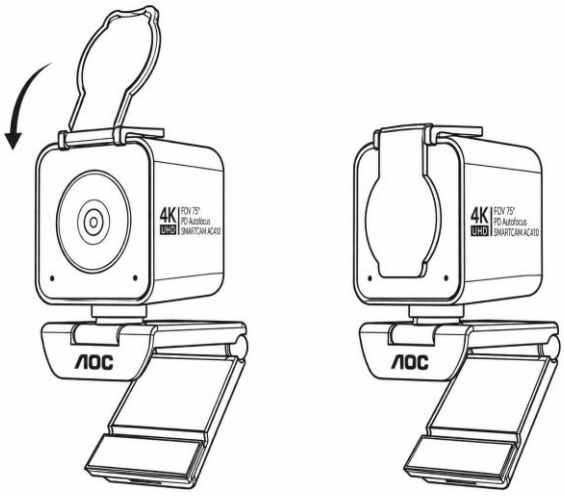

Flip the privacy cover to control camera access.

Open the Privacy Cover
Lift the privacy cover upward until the lens is fully exposed.

Close the Privacy Cover
Flip the privacy cover downward until the lens is fully covered.

NOTE:
Keep the privacy cover closed when the webcam is not in use to help protect your privacy.

3. Video, Audio and App Settings

3.1 Supported Video Resolutions

4K UHD	2K QHD	Full HD	HD	VGA
3840 × 2160 @ 30 fps	2560 × 1440 @ 30 fps	1920 × 1080 @ 30/60 fps	1280 × 720 @ 30/60 fps	640 × 480 @ 30/60 fps

3.2 Why Video May Not Appear in 4K

The AC410 can output video at up to 3840 × 2160 at 30 fps and supports 1920 × 1080 at 60 fps. The resolution and frame rate available in a specific application may be limited by the application, operating system, USB connection, computer performance, and—in video calls—the conferencing service or network conditions.

NOTE: Some conferencing applications may limit video resolution or frame rate even when the webcam supports higher output modes. Some macOS built-in camera applications may default to 1080p.

1	**Check the app —** Open the video settings in your camera or conferencing application.
2	**Choose resolution —** Select the highest supported resolution available.
3	**Confirm system limits —** Make sure the computer, application, connection, and network conditions support the requested resolution.


3.3 Camera and Microphone Access

CAMERA	MICROPHONE
Allow camera access. If another camera opens, select the AOC AC410 webcam manually.	Allow microphone access and select the webcam microphone as the input device.

3.4 Windows and macOS Setup

Open the built-in camera application and select the AOC AC410 webcam if another camera is active.

NOTE: Available video settings and resolutions may vary by operating system and application. Some built-in macOS camera applications may default to 1080p and may not provide manual resolution controls.

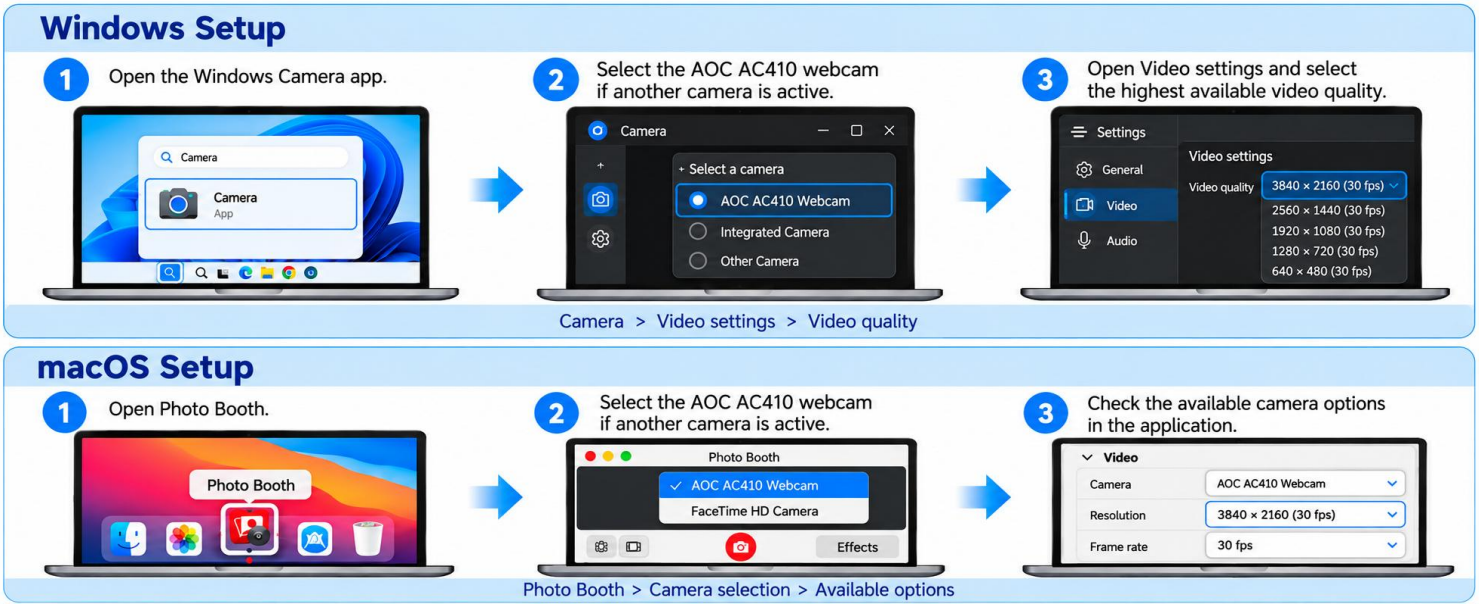

3.5 Compatible Applications

The AC410 is compatible with commonly used camera and video conferencing applications such as **Switch 2, Zoom, Microsoft Teams, Skype, FaceTime, Windows Camera, and Photo Booth.**

NOTE:

Available camera and microphone options, resolutions, and frame rates may vary by application. If another device is selected automatically, open the application's **Video or Audio** settings and select the **AOC AC410 webcam** manually.

4. Troubleshooting and FAQ

4.1 Quick Problem Solver

Follow the matching checks in order, then test the AC410 after each step.

Webcam not detected / no video 1. Make sure the privacy cover is open. 2. Reconnect the USB-A cable or try another USB port. 3. Allow camera access and select the AOC AC410 in the application. 4. Restart the application or computer and test again.	**Grainy, blurry or out-of-focus image** 1. Clean the lens with a soft microfiber cloth. 2. Keep the subject at least 5 cm from the lens. 3. Improve the lighting and allow autofocus to adjust. 4. Select a higher supported resolution in the application.
Colors inaccurate / image too dark or bright 1. Check the lighting and avoid strong backlighting. 2. Move away from direct or uneven light sources. 3. Check the available brightness, exposure and color settings. 4. Test the webcam in another compatible application.	**Video freezes, flickers or shows lines** 1. Close other applications that may be using the webcam. 2. Connect directly to a compatible USB port. 3. Try a lower supported resolution or frame rate. 4. Restart the application and test again.
Microphone not working / poor audio 1. Allow microphone access in the system and application. 2. Select the AC410 microphone as the audio input. 3. Check mute, input level and nearby background noise. 4. Test the microphone in another compatible application.	**Resolution or camera settings unavailable** 1. Open the application's camera or video settings. 2. Select an available supported resolution and frame rate. 3. Check application and operating system limitations. 4. Try another compatible camera application.
Webcam disconnects during use 1. Make sure the USB connection is secure. 2. Try another compatible USB port. 3. Connect directly to the computer instead of an unpowered USB hub. 4. Restart the computer and test again.	**Camera does not work in an application** 1. Close other applications that may be using the camera. 2. Allow camera access for the application. 3. Select the AOC AC410 in the application's camera settings. 4. Restart the application and check its recording settings if needed.

WHEN TO STOP TROUBLESHOOTING:

Stop using the product and contact Customer Support if the webcam, cable, connector, or housing is visibly damaged; becomes unusually hot or wet; produces smoke or an unusual odor; or the next step requires disassembly or unauthorized repair.

4.2 Frequently Asked Questions (FAQ)

1. Q: What computers, operating systems, and applications are compatible with the AC410?

A: The AC410 supports compatible Windows, macOS, and ChromeOS computers. It works with commonly used video applications such as Switch 2, Zoom, Microsoft Teams, Skype, and FaceTime. Available camera and microphone features may vary by operating system and application.

2. Q: What does the 75° field of view mean, and can I zoom in or adjust the viewing angle?

A: The AC410 has a 75° field of view, which determines how much of the scene the camera captures. You can adjust the webcam's physical position and angle to change the framing. Digital zoom or field-of-view adjustment, if available, depends on the application.

3. Q: Does the AC410 support 1080p at 60 fps?

A: Yes. The AC410 supports 1920 × 1080 at both 30 fps and 60 fps. The available frame rate may vary depending on the application, operating system, and USB connection.

4. Q: Does the AC410 support true 4K resolution?

A: Yes. The AC410 supports up to 3840 × 2160 at 30 fps. Actual video resolution may be limited by the application, operating system, computer performance, or video conferencing service.

5. Q: Can I use the AC410 on a monitor or place it on a desk?

A: Yes. You can attach the AC410 to the top edge of a monitor using its flexible clip/base, or mount it on the included tripod using the 1/4" tripod screw hole. Place the tripod on a flat, stable surface before use.

6. Q: How does PDAF autofocus work on the AC410?

A: The AC410 features phase detection autofocus (PDAF), which automatically adjusts focus to keep the subject clear. The supported focus range is approximately 5 cm to infinity.

7. Q: Can I detach or replace the AC410's USB cable?

A: The AC410 uses an attached USB-A cable. Do not attempt to pull the cable out of the webcam or modify the connection. For a computer with a compatible USB-C port, use the supplied USB-A to USB-C adapter.

8. Q: Can I disable the built-in microphone or use another microphone instead?

A: You can mute the AC410 microphone or select another audio input device in your operating system or application's audio settings, where supported. The AC410 does not have a documented dedicated hardware microphone mute switch.

9. Q: Does the AC410 require drivers or special software?

A: No. The AC410 is plug-and-play and does not require a dedicated driver for basic camera and microphone operation on compatible computers. Simply connect the webcam to a compatible USB port and select the AOC AC410 in your camera or video conferencing application if needed.

5. Specifications, Compatibility, Care and Support

5.1 Technical Specifications

Specification	AC410
Video resolution	3840 × 2160 @ 30 fps; 2560 × 1440 @ 30 fps; 1920 × 1080 @ 30/60 fps; 1280 × 720 @ 30/60 fps; 640 × 480 @ 30/60 fps
Image sensor	High-resolution CMOS color sensor
Field of view	75°
Focus range	5 cm to infinity; PDAF autofocus
Automatic brightness	Supported
Automatic color	Supported
Microphone	Built-in noise-canceling microphone
Privacy cover	Integrated flip-up privacy cover
Connection	USB-A; supplied USB-A to USB-C adapter
Mounting	Flexible clip/base; 1/4" tripod screw hole; tripod included

5.2 Compatibility

Basic webcam compatibility and application compatibility may vary by operating system and software.

• Compatible with computers that support standard UVC/UAC USB video and audio devices, including supported versions of Windows, macOS, and ChromeOS.

5.3 Care and Safety

• Secure the webcam to a display using the flexible clip, or place the included tripod on a flat, stable surface.

• Keep the webcam, USB connector, and cable away from water and moisture.

• Do not use or store the webcam in extremely hot or cold environments.

• Clean the housing with a soft, dry cloth; clean lens with a microfiber cloth.

• Do not use strong or corrosive cleaning agents.

• Keep ventilation openings free from obstruction.

• Do not pull, crush, step on, or place excessive pressure on the USB cable.

• Do not disassemble, modify, or attempt unauthorized repair.

5.4 Support and Product Information

Customer Support	aoc-after-sales@customerafter-sales.com
Prepare for Support	Model AC410, Amazon order number, computer model, operating system, application being used, issue description, and steps already tried
Product / Origin	AOC AC410 4K Webcam | Made in China
Document	AOC410-UG-US-EN | Version 1.0 | Effective October 2026