

Features

- Carbon element
- Ganging up to 8 sections available
- Knurled and flatted shaft styles
- Audio taper option
- Tracking error within 3 dB
- RoHS compliant*



PTD90 Series - 9 mm Multi-Ganged Potentiometer

Electrical Characteristics

Standard Resistance Range1 K ohms to 1 M ohms Total Resistance Tolerance±10 % or ±20 % Standard TapersLinear & audio Maximum Operating Voltage 150 VAC, 20 VDC Rated Power Linear Taper0.05 watts Audio Taper......0.025 watts Noise 100 mV max. Insulation Resistance @ 250 VDC 100 M ohms Dielectric Withstanding Voltage300 VAC End Resistance20 ohms max. Tracking Error (-40 dB to 0 dB)......±3 dB

Environmental Characteristics

Operating Temperature

Mechanical Characteristics

Manual Soldering

......96.5 Sn/3.0 Ag/0.5 Cu solid wire or no-clean rosin cored wire 270 °C max. for 3 seconds


Wave Soldering


wave Soldering
......96.5 Sn/3.0 Ag/0.5 Cu solder
with no-clean flux
260 °C max. for 5 seconds
Wash Process Not recommended
Mounting Hardware One flat washer
and one mounting nut supplied


per potentiometer

Product Dimensions


PTD901








SCHEMATIC





DIMENSIONS: $\frac{MM}{(INCHES)}$

PTD902




RECOMMENDED PCB LAYOUT





Derating Curve



Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

Applications

- Audio/TV sets
- Automotive sound systems
- Amplifiers/mixers/drum machines/synthesizers/DJ equipment
- Multimedia sound systems
- Portable electronics


PTD90 Series - 9 mm Multi-Ganged Potentiometer

BOURNS

Product Dimensions PTD904 PTD906 PTD908 17.2 ± 0.5 (.677 ± .020) 24.7 ± 0.5 $(1.268 \pm .020)$ M7XP0.75 M7XP0.75 R4 R3 -M7XP0.75 (R2)R1 $\frac{0.8 \pm 0.2}{(.031 \pm .008)}$ R4 R3 0.8 ± 0.2 0.8 ± 0.2 5.0 $(.031 \pm .008)$ (.031 ± .008) (.197) (.197) (.197).197 (.197) (.197) 2.5 (.098) (.098)(.098)2.5 (.098) (.098)(.098)(.197)2.5 (.197) RECOMMENDED PCB LAYOUT (.098)RECOMMENDED PCB LAYOUT RECOMMENDED PCB LAYOUT MOUNTING - SURFACE -DIA. HOLES 12 PLCS. 1.0 +0.2/-0 MOUNTING (.197 (.197 (.039 + .008/-0)R3 DIA. HOLES 18 PLCS. 1.0 +0.2/-0 2.5 (.098) MOUNTING - SURFACE SCHEMATIC (.039 + .008/-0)(.098)(.098) -DIA. HOLES 24 PLCS. 1.0 +0.2/-0 **SCHEMATIC** 2.5 (.098) $\frac{2.0}{(.098)}$ (.039 + .008/-0)2.5 (.098) (.098)SCHEMATIC R2 0 Q DIMENSIONS: (INCHES)

PTD90 Series - 9 mm Multi-Ganged Potentiometer


Product Dimensions SHAFT STYLE "K" (.020)(.059)В 18 TEETH KNURL 1.0 (.039)6.0 +0/-0.1 (.236 +0/-.004) DIA. -30° 4.8 ± 0.3 9.5 ± 0.3



L	15 (.591)	<u>20</u> (.787)	25 (.984)
В	<u>5</u> (.197)	<u>7</u> (.276)	10 (.394)
А	<u>6</u> (.236)	10 (.394)	12 (.472)

SHAFT SHOWN IN CCW POSITION

MM DIMENSIONS: (INCHES)

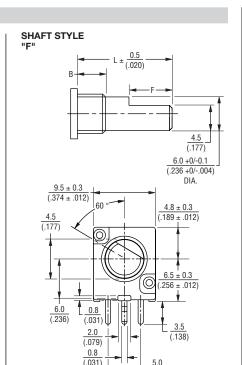

L	15	<u>20</u>	25
	(.591)	(.787)	(.984)
В	<u>5</u>	<u>7</u>	10
	(.197)	(.276)	(.394)
F	(.276)	12 (.472)	12 (.472)

SHAFT SHOWN IN CCW POSITION

(.197)

How To Order PTD90 1 - 2 0 20 K - B 203 Model -PTD90 = No Switch No. of Sections 1 = 1 Section 2 = 2 Sections 3 = 3 Sections 4 = 4 Sections 5 = 5 Sections 6 = 6 Sections 8 = 8 Sections Pin Style PC Pins vertical/ down facing and ±10 % Total Resistance Tolerance PC Pins vertical/ down facing and ±20 % Total Resistance Tolerance Center Detent Option • 0 = No Detent • 2 = Center Detent Standard Shaft Length • 15 = 15 mm • 20 = 20 mm • 25 = 25 mmShaft Styles Knurled Type Shaft (Metal) 18 Toothed Serration Type


Flatted Metal Shaft


Resistance Taper (See Taper Charts) -Taper Series followed by Curve Number


Resistance Code (See Table)

Other shaft styles available.

Tapers







REV. 12/14

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.