


PIN DIAGRAM OF 8051

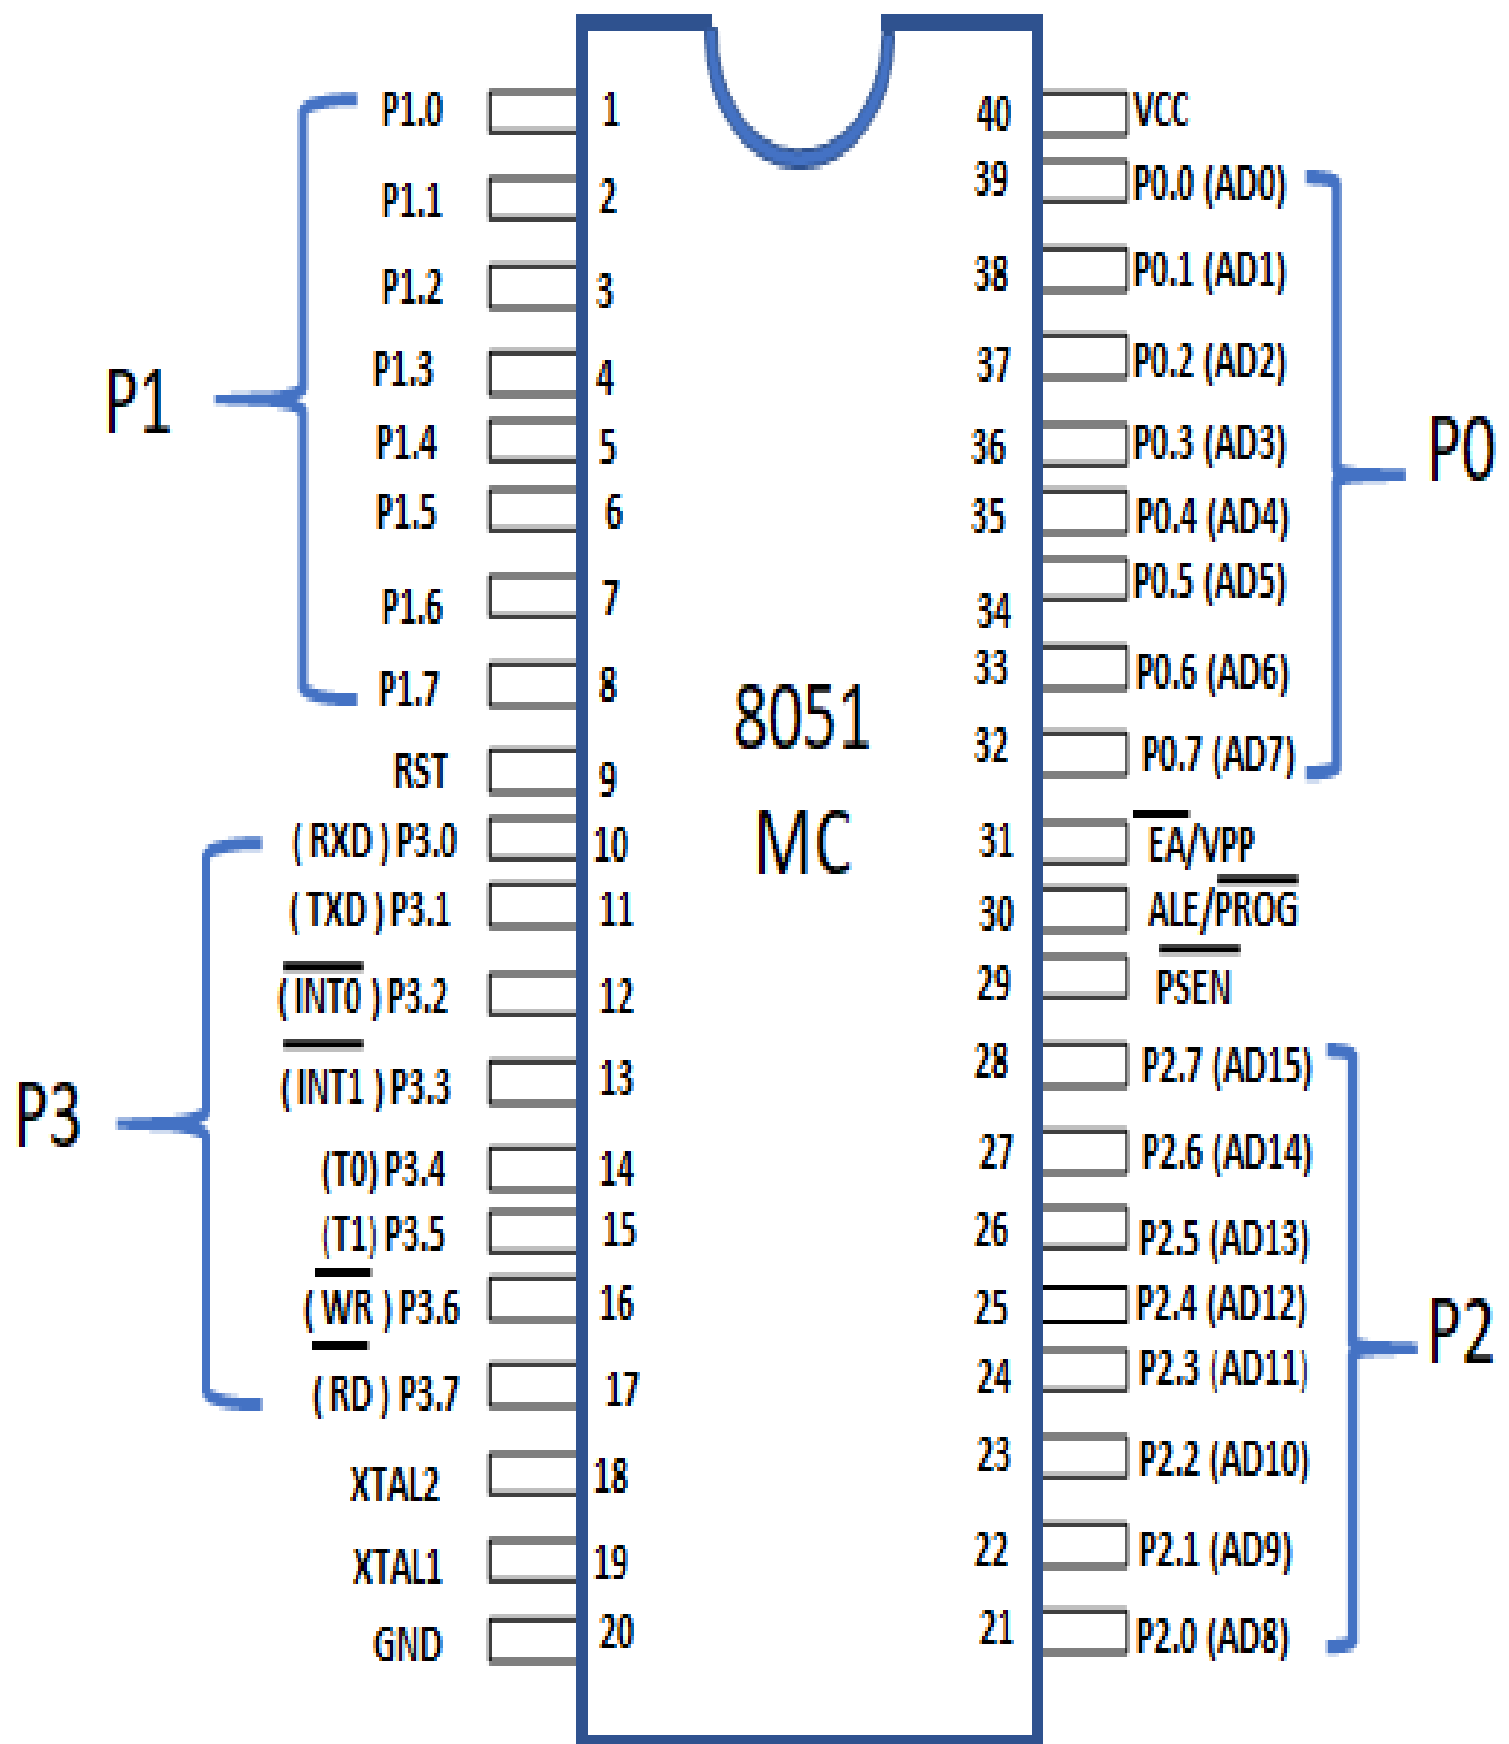

Pin Diagram of 8051 Microcontroller

Pins 1 to 8 – These pins are known as Port 1. This port doesn't serve any other functions. It is internally pulled up, bi-directional I/O port.

Pin 9 – It is a RESET pin, which is used to reset the microcontroller to its initial values.

Pins 10 to 17 – These pins are known as Port 3. This port serves some functions like interrupts, timer input, control signals, serial communication signals RxD and TxD, etc.

Pins 18 & 19 – These pins are used for interfacing an external crystal to get the system clock.

Pin 20 – This pin provides the power supply to the circuit.

Pins 21 to 28 – These pins are known as Port 2. It serves as I/O port. Higher order address bus signals are also multiplexed using this port.

Pin 29 – This is PSEN pin which stands for Program Store Enable. It is used to read a signal from the external program memory.

Pin 30 – This is EA pin which stands for External Access input. It is used to enable/disable the external memory interfacing.

Pin 31 – This is ALE pin which stands for Address Latch Enable. It is used to demultiplex the address-data signal of port.

Pins 32 to 39 – These pins are known as Port 0. It