

Description

The PICO® II 263 Series Fuse is a specially designed axial leaded fuse that achieves a 250V rating in a small package.

Features & Benefits

- 250V rating
- Very fast-acting
- Small size
- Wide range of current rating available (62mA to 5A)
- RoHS compliant and Halogenfree
- Wide operating temperature range
- Low temperature rerating

Additional Information



Resources





Samples

Applications

- Lighting system
- Power supply
- LCD/PDPTV
- LCD monitor
- Office automation machines
- Audio/Video system
- Medical equipment

Electrical Characteristics

Accessories

% of Ampere Rating	Opening Time
100%	4 Hours, Min .
200%	1 Second, Max.
300%	0.1 Second, Max.

Agency Approvals

Agency	Agency File Number	Ampere Range		
<i>71</i> .	E10480	0.062A - 5A		
PS	PSE_NBK200416-JP1021	1A - 5A		
(29862	0.125 - 5A		
UK	NA	0.062A - 5A		
Œ	NA	0.062A - 5A		

Electrical Characteristics


Ampere		Max	Interrupting			Nom		Ageı	ncy Appr	ovals	
(A)	Rating Amp Code (A)	Voltage Rating Rating (V)		Resistance (Ohms)	Melting Voltage Drop I²t (A² sec) (mV)	UK	Œ	<i>71</i>	⟨PS⟩ E	(10000000000000	
0.062	.062	250		5.50	0.000192	0.74	Х	Х	Х	-	-
0.125	.125	250		1.745	0.00251	0.3	Х	Х	X	-	Х
0.250	.250	250		0.715	0.0165	0.235	Х	Х	Х	-	Х
0.375	.375	250		0.391	0.0444	0.195	Х	Х	Х	-	Х
0.500	.500	250		0.252	0.084	0.302	Х	Х	Х	-	Х
0.750	.750	250		0.150	0.0411	0.176	Х	Х	Х	-	Х
1.00	001.	250*	50A@250VAC PSE: 100A@	0.105	0.087	0.165	X	Х	Х	X	Х
1.50	01.5	250*	125VAC	0.0635	0.2958	0.148	Х	Х	Х	X	Х
2.00	002.	250*		0.0444	0.74	0.137	Х	Х	Х	X	Х
2.50	02.5	250*		0.0340	1.197	0.128	Х	Х	Х	Х	Х
3.00	003.	250*		0.0274	1.77	0.1225	Х	Х	Х	Х	Х
3.50	03.5	250*		0.0224	2.33	0.1175	Х	Х	Х	Х	Х
4.00	004.	250*		0.0193	3.08	0.1125	Х	X	Х	X	Х
5.00	005.	250*		0.0145	5.55	0.1065	Х	Х	Х	Х	Х

^{*} PSE Approval has max. voltage range of 125VAC.



263 SeriesPICO® II 250 Volt Fuse, Very Fast Acting

Temperature Re-rating Curve

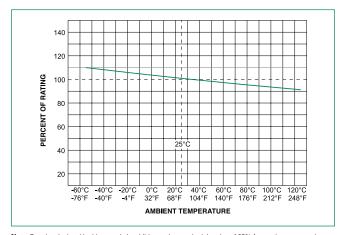

Note: Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Soldering Parameters

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260° C Maximum
Solder Dwell Time:	2-5 seconds


Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5°C

Heating Time: 5 seconds max.

Note: These devices are not recommended for IR or Convection Reflow process.

Average Time Current Curves

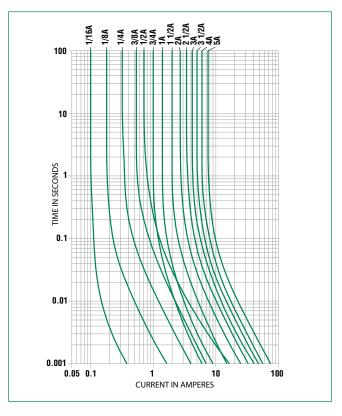




Product Characteristics


Materials	Encapsulated, Epoxy-Coated Body: Solder Coated Copper Leads. RoHS compliant Product: Pure Tin-coated Copper wire leads	
Solderability	MIL-STD-202. Method 208.	
Product Marking	Body marking, current rating and logo	
Operating Temperature	-55°C to +125°C (Consider re-rating)	
Shock	MILSTD-202, Method 213, Test Condition I (100 G's peak for 6 milliseconds)	

Vibration	MILSTD-202, Method 201 (10–55 Hz); MILSTD-202, Method 204, Test Condition C (55–2000 Hz at 10 G's Peak)
Salt Spray	MIL-STD-202, Method 101, Test Condition B (48 hrs.)
Insulation Resistance (After Opening):	MIL-STD-202, Method 302, Test Condition A (10,000 ohms minimum at 100 volts)
Resistance to Soldering Heat	MIL-STD-202, Method 210, Test Condition C (10 sec. at 260°C)
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (-55°C to 125°C)
Moisture Resistance	MIL-STD-202, Method 106
Lead Pull Force	MIL-STD-202, Method 211, Test Condition A (will withstand 7 lb. axial pull test)

Dimensions

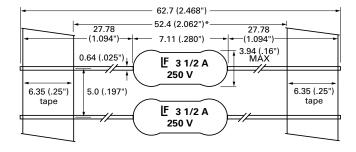

Part Numbering System

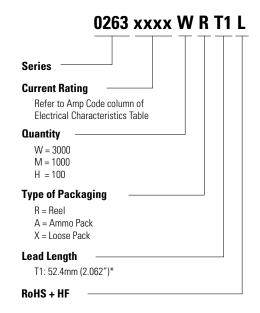

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	
T1: 52.4mm (2.062") Tape and Reel	EIA 296	Please refer to available quantities above in "Part Numbering System"		

Notes: * T1 dimension is defined as the length of the component between the two tapes. The full component length is 62.7mm (2.468").

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.

