

456SD Series Fuse





Agency Approvals

AGENCY AGENCY FILE NUMBER		AMPERE RATING	
c 711 ° us	E10480	40A – 50A	

Electrical Characteristics

% of Ampere Rating		Opening Time	
	100%	4 hours, Minimum	
	200%	60 seconds, Maximum	

Additional Information



Datasheet



Resources



Samples

Description

The High Current NANO^{2®} Fuse is a small square surface mount fuse that is designed to support higher current requirements of various applications.

Features

- Available in ratings of 40 to 50A
- High interrupting rating -600A@75VDC
- Very low cold resistance, temperature rise, and voltage drop
- High inrush/surge current withstand capability
- Surface mountable high current fuse
- UL 248-1 and UL 248-14 recognized

Benefits

- Single fuse solution for high current application
- Suitable for a wide variety of voltage requirement and application
- Enhances power efficiency
- Avoids nuisance opening due to high inrush and surge current inherent in the system
- Compatible with high volume assembly requirements

Applications

- Voltage regulator module for PC server
- Cooling fan system for PC server
- Storage system power
- Basestation power supply
- Power tools

Electrical Specifications


Ampere Rating (A)	Amp Code	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I²t (A² Sec.)	Nom Voltage Drop (mV)	Agency Approvals
40	040.	125	100A @ 125VAC 600A @ 75VDC	0.00130	1700	110	x
50	050.	125	100A @ 125VAC 600A @ 75VDC	0.00105	2700	115	х

Notes:

- 1. Cold resistance measured at less than 10% of rated current at 23°C.
- 2. Agency Approval Table Key: X = Approved or Certified, P = Pending.
- 3. I²t values stated for 1 msec opening time.




Temperature Re-rating Curve




Note: Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

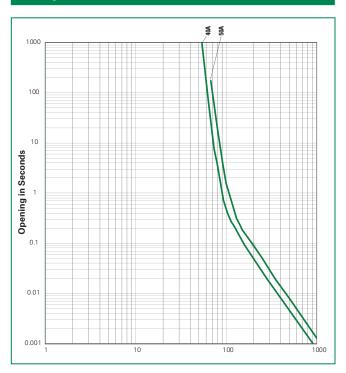

Soldering Parameters – Reflow Soldering

Reflow Co	ndition	Pb-free assembly	
	-Temperature Min (T _{s(min)})	150°C	
Pre Heat	-Temperature Max (T _{s(max)})	200°C	
	-Time (Min to Max) (t _s)	60 – 180 secs	
Average ramp up rate (Liquidus Temp (T _L) to peak		5°C/second max.	
T _{S(max)} to T _L - Ramp-up Rate		5°C/second max.	
Reflow	-Temperature (T _L) (Liquidus)	217°C	
nellow	-Temperature (t _L)	60 – 150 seconds	
Peak Temperature (T _P)		260 ^{+0/–5} °C	
Time within 5°C of actual peak Temperature (t _p)		20 – 40 seconds	
Ramp-down Rate		5°C/second max.	
Time 25°C to peakTemperature (T _P)		8 minutes max.	
Do not exceed		260°C	

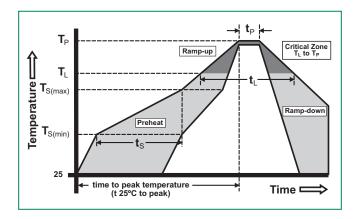




Product Characteristics


Materials	Body: Ceramic Cap: Silver Plated Brass		
Product Marking	Body: Current Rating, Brand Logo		
Insulation Resistance	MIL-STD-202, method 302, Test Condition A (10,000ohms, Minimum)		
Solderability	MIL-STD-202, Method 208		
Resistance to Soldering Heat	MIL-STD-202, Method 210, Test Condition B (10 sec at 260°C)		
PCB Recommendation for	Minimum copper trace width = 15mm (40A) / 25mm (50A) Recommended copper trace weight = 3oz (40A) / 6oz (50A) For PSE requirements: Minimum Copper trace width = 35mm Recommended Copper trace weight = 6oz		
Thermal Management	Alternate methods of thermal management may be used. In such cases, under normal operations, the maximum temperature of the fuse body should not exceed 90°C in a 25°C environment.		

Operating Temperature	-55°C to 125°C with proper derating	
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles -65°C to 125°C)	
Vibration	MIL-STD-202, Method 201 (10 – 55Hz)	
Moisture Sensitivity Level	J-STD-020, Level 1	
Moisture Resistance	MIL-STD-202 Method 106, High Humidity (90-98%RH), Heat (65°C)	
Salt Spray	MIL-STD-202, Method 101, Test Condition B	
Mechanical Shock	MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 milliseconds)	

Dimensions

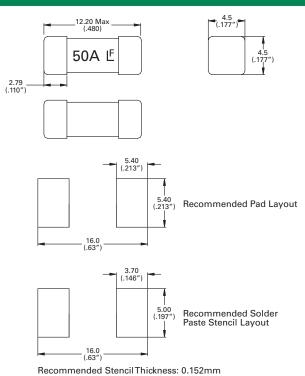

Part Numbering System



Packaging				
Rating	Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code
40A 50A	24mm Tape and Reel	EIA RS-481-2 (IEC 286, Part 3)	1500	DR

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.