



HELMET BLUETOOTH HEADSET

T1

 Bluetooth®




Product Introduction

Thank you for choosing the **iRide-T1** Helmet Bluetooth Intercom Headset, which is designed for motorcycle or outdoor sports users to meet the needs of people in the process with helmet, such as intercom, answering phone calls, music listening, FM radio listening and receiving GPS navigation voice prompts. Provide you with a clear, safe and comfortable experience during the ride.

iRide-T1 has the newest version 5.2 Bluetooth, stable system operation, dual intelligent noise cancellation, low power consumption, with 40mm high quality speakers and intelligent microphone, support two devices connected to achieve two people intercom. The T1 is a high-tech Bluetooth headset that combines light weight, energy saving and humanized design.

Product Introduction Diagram

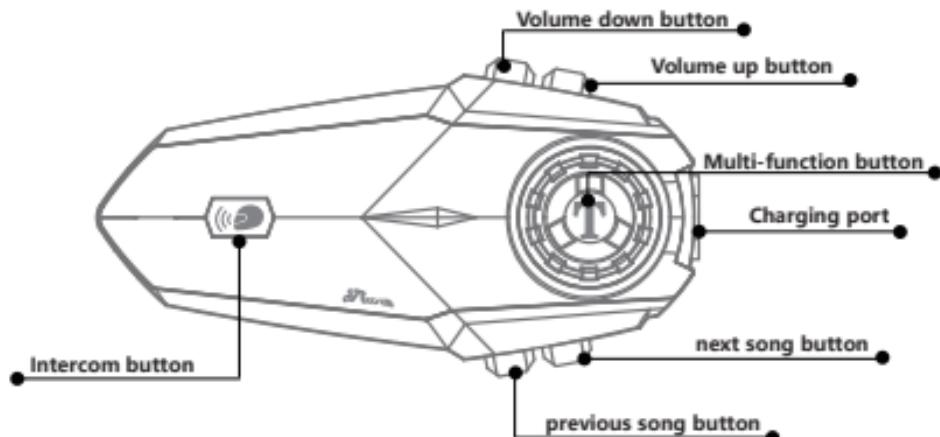

Function Description


- Qualcomm version 5.2 Bluetooth chip
- Intelligent DSP audio processing, the 12th generation of CVC noise reduction processing, 16K voice bandwidth transmission rate
- 1000m 2-way intercom Bluetooth headset
- High pairing speed
- Fast charging
- Music sharing
- FM radio
- Voice assistant
- Automatic answer, support last dialed number redial
- Intelligent microphone
- Support voice communication at 120 km/h speed
- 40mm tuning speaker, wonderful sound experience
- IP67 level waterproof
- 900mAh battery capacity, supports 20 hours intercom/phone call
- Support pairing with other brand headsets

Button Functions and Operations

Power on/off

Power on: Press and hold the [multi-function button + intercom button] for 3 seconds, the power-on prompt will sound, and the blue light will be on.


Power off: Press and hold the [multi-function button + intercom button] for 3 seconds, the power off prompt sounds, and the red light is on.

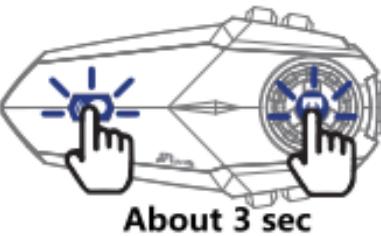

Reset: Press and hold the [multi-function button + volume up button] for 5 seconds in the power-on state, reset after the red and blue lights come on at the same time.

Answering Function

Answer incoming calls: When there is an incoming call, short press [Multi-function button] to answer the call.

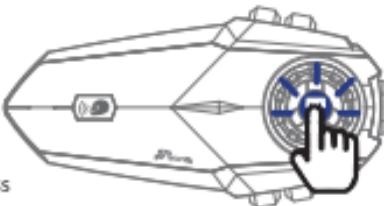


Automatic answer: In standby mode, long press [intercom button + volume up button + volume down button] for 3 seconds, automatic answer is on.

Reject: Press and hold [Multi-function button] for 2 seconds to reject the call when you hear an incoming call ringing.

Last redial: In standby mode, quickly double-click [multi-function button] to automatically dial the last number dialed.

Cancel auto-answer: If you don't need the auto-answer function, you can long press [intercom button+volume up button+volume down button] for 3 seconds to cancel the auto answer.

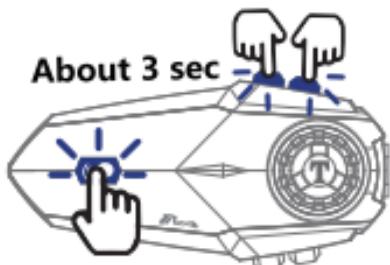

Music Control

- ① **Play/Pause:** Intercom Bluetooth connection state, short press [multi-function button] to play music, short press [multi-function button] again to pause the music.
- ② **Next song:** short press the [next song button] to select the next song
- ③ **Previous song:** short press the [previous song button] to return to the previous song.

Volume Adjustment

Short press the [volume up button] to increase the volume, short press the [volume down button] to decrease the volume.

FM Radio

- ① **Turn on the radio:** in standby mode, press and hold the volume down button] for 2 seconds to start the FM radio.
- ② After turning on the FM radio, every time you short press the previous song or next song button, you can tune and select channels (Note: short Press the volume up/down key to enter the volume adjustment mode, you can increase the volume or decrease the volume at this time).
- ③ **Turn off the radio:** long press the [volume down button] for 2 seconds, FM off.


Attention

1. When the indoor signal is weak, in order to make the FM radio work best, you can try to turn on the FM radio near the window or outdoors.
2. In radio mode, when there is an incoming call, the headset will automatically disconnect the radio and answer the phone or connect to the intercom voice. After the call ends, headset revert to the radio function automatically.

Pairing Operation

Bluetooth pairing with cell phone

- 1) Turn on Bluetooth:** In the power-on state, press and hold the [multi-function button] for 5 seconds, until the red and blue lights flash alternately. At this time has entered the Bluetooth waiting to connect state. If you have connected to other devices, the blue light will flash slowly. Please reset and turn on the device again.
- 2) Search cell phone Bluetooth:** In the state of red and blue lights alternately flashing, open the cell phone Bluetooth settings, search for nearby Bluetooth devices, select " iRide-T1 " for connection pairing, after successful connection there will be a voice prompt"device has been connected", then the Bluetooth pairing success.

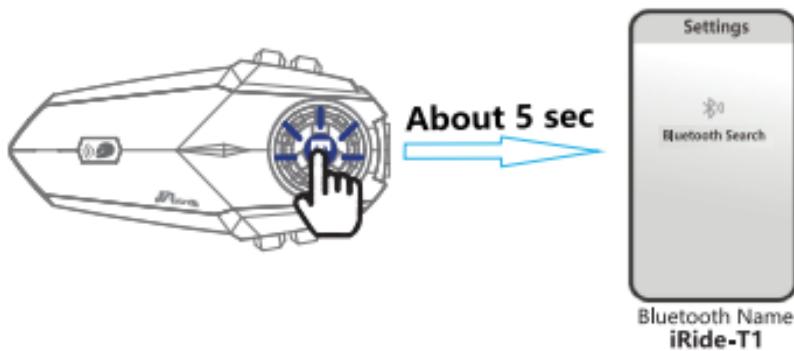

Attention:


1. If you have connected to other phones, the blue light will flash slowly, please reset and turn on the device again.
2. Search for cell phone Bluetooth, select " iRide-T1 " connection pairing, click to connect. When the pairing is successful, it will be accompanied by the voice prompt "device is connected", and the Bluetooth connection is successful. If the connection fails, you can tap into the Bluetooth list of the Tricer-T2 and click "Forget this device" and search for the connection again.

Pairing and intercom between headsets

1. Pairing and intercom between two Bluetooth intercoms (A,B)

Active/passive pairing operation:

- 1) Turn on the two Bluetooth intercoms (A,B), press and hold the B intercom [multi-function button] for 5 seconds, At this time, red and blue lights alternately flashing, passive pairing mode on.
- 2) Long press the [intercom button] of A, red and blue lights alternately slow flashing, into the active pairing mode. When you hear the "search" prompt voice, active pairing is on.
- (3) voice prompt "device has been connected", the two intercoms connected successfully, the blue light flashes slowly.

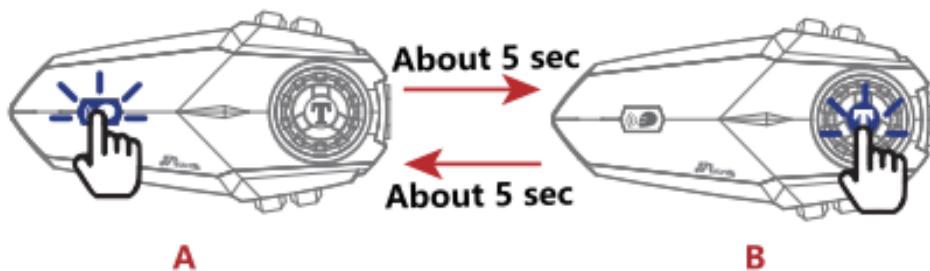

Attention:

1. After the intercom pairing is successful, when intercom, if there is a cell phone call, the device will automatically cut off intercom. After the call is over, it will automatically connect back to the intercom state.
2. In the process of intercom, because of distance or environmental factors such as disconnection, you can manually short press the [intercom button] once, manually back to connect.
3. When the device is in standby mode, short press the [intercom button] to open the intercom; short press the [intercom button] to turn off the intercom in the intercom state. Short press the volume up/down button to adjust the call volume.

Music Sharing


Turn on sharing:

When two devices are on, music sharing must be done by the device that initiates intercom in order to share to each other, such as specifying device A to share to device B. The operation steps are as follows:

1. Device A connects to the Bluetooth of the cell phone (keep the music on and the music is paused).
2. Pair the two devices A and B (keep the two devices in non-intercom state).
3. After successful pairing, press and hold the [volume up button] of device A for 2 seconds to turn on music sharing. The blue light flashes slowly and the voice prompts "start sharing music", then music sharing is successful.

Turn on sharing:

In the process of music sharing, press and hold the [Volume Up button] of device A for 2 seconds to turn off music sharing. The blue light flashes slowly, and the voice prompts "stop music sharing", then music sharing is off.

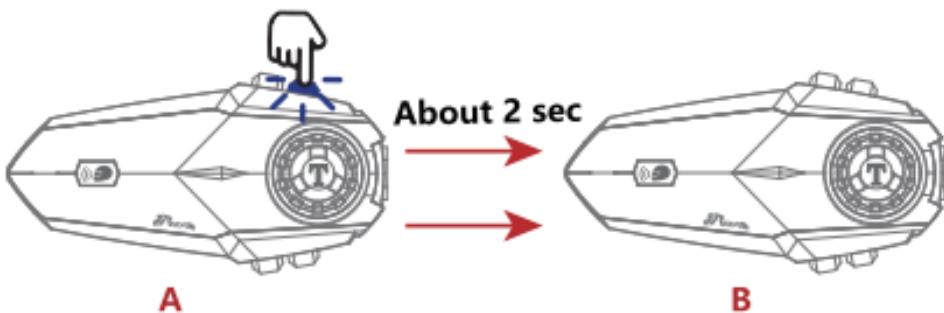

Attention:

1. Headset A that initiates music sharing must be connected to cell phone Bluetooth.
2. A and B Headsets need to be paired and connected successfully before music sharing.
3. When sharing music, the A headset that initiates music sharing can pause/start sharing by short pressing [multi-function button].

Voice assistant

In standby state, short press [volume up button+ volume down button] to enter the voice assistant function. At this time, the blue light flashes slowly.

Last number redial

In standby mode, short press [Multi-function key] twice to redial the last number. At this time, the blue light flashes quickly.

Reset

In the power on state, long press [multi-function button+ volume up button] for 3 seconds, the red and blue lights up at the same time to reset.


Battery level reminder

In standby mode, long press [multi-function key + volume down key] for 2 seconds, the voice will announce the battery level of the device. When the battery level is too low, there will also be a low battery reminder.


Microphone on/off

When the device is in standby mode, press and hold the Volume Up key for 2 seconds to enable the microphone with voice prompt. Press and hold the Volume Up button for 2 seconds to mute the microphone.

T1 Package List



Bluetooth headset



Speaker & microphone



Mounting bracket



Single-sided
adhesive pad



Double-sided
adhesive pad



Metal clip



Speaker velcro
Sponge Sticker



Square velcro



Charging cable



Manual

1. Bluetooth headset X1
2. Speaker & microphone X2
3. Mounting bracket X1
4. Single-sided adhesive pad X2
5. Double-sided adhesive pad X2
6. Metal clip X1
7. Speaker velcro X2
8. Sponge Sticker X2
9. Square velcro X2
10. Charging cable X1
11. Manual X3

Charging Instructions:

1. Before using the Bluetooth intercom, please use the attached special charging cable to charge the intercom. The TYPE-C connector on the charging cable connects to the charging port of the Bluetooth intercom, and the USB connector on the charging cable connects to the following charging port for power supply.
 - A. USB port of the computer
 - B. Mobile power supply with DC 5V output
 - C. The output is DC 5V USB power adapter
2. When charging, the red LED light is stays on. When fully charged, the red light is off and the blue light is on. It takes about 2 hours from low battery to full charge.

Product Parameters

Working distance: 1000m Bluetooth intercom for two riders

Working frequency: 2.4GHz

Bluetooth version: Bluetooth 5.2

Support Bluetooth protocol: HSP/HFP/A2DP/AVRCP

Battery type: 900mAh rechargeable lithium polymer

Standby time: 600 hours


Talking time: 20 hours of cell phone talk/intercom

Charging time: about 2 hours

Power adapter: DC 5V 1A (optional)

Charging interface: TYPE-C interface

Operating temperature: 0°C-50°C

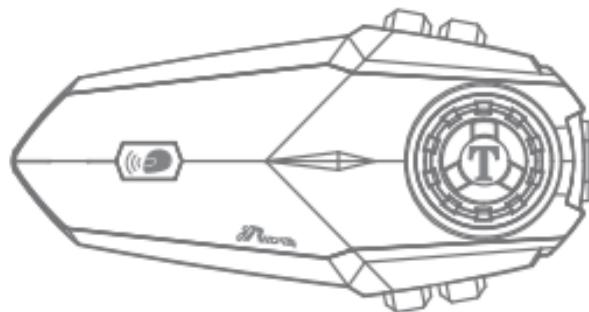

Caution

- ① If you do not use the device for a month or more, in order to protect the device lithium battery, please charge the device every two months.
- ② Do not expose the product to open flame to avoid explosion.
- ③ Device can not be opened by themselves, so as not to short circuit the main board or battery damage, affecting the normal use, be sure to pay attention.



User Manual PDF Link



IG: @iride.scooter_and_motorcycle



Youtube: @iride.scooter_and_motorcycle



CCAJ23LP2D00T2



MADE IN CHINA