Loop-SaboteurXXL — USE ME

Version 0.1.0 · for MPC OS on the Akai Force (first-generation MPC OS units should work too)

Loop-SaboteurXXL is **Loop Saboteur** by Stephen McLeod Blythe / AMFAS (clickysteve/Loop-Saboteur) running as a native insert effect inside MPC OS. The sound engine is the original's own code. This port gives it MPC screens, Q-Links, saving with your project and banks on the device. Art and build: Claude. Developer: L'Cronx.


This guide takes you from the zip file to playing it: installing, the screens, the sequencer, the MODs, saving, the Q-Links, recipes and fixes. For the deeper story of each effect, Loop Saboteur's own manual is at clickysteve.github.io/Loop-Saboteur.

Contents

1. What it does, in one minute
2. Install
3. Put it on a track
4. Your first minute with it
5. The screen: header, pages, readout
6. The pages, control by control
7. The sequencer in depth
8. MODs in depth
9. Saving: projects and banks
10. Q-Links and MIDI
11. Recipes
12. Troubleshooting
13. Update and uninstall
14. Differences from the desktop plugin
15. Credits and licence

1. What it does, in one minute

Loop-SaboteurXXL **records the last bars** of whatever goes through it into a rolling buffer (32 seconds of stereo). On the beats of **MPC's song grid** it **fires**: it grabs a **slice** of that buffer and plays it back through a chain of effects, mixed over your untouched (dry) signal:

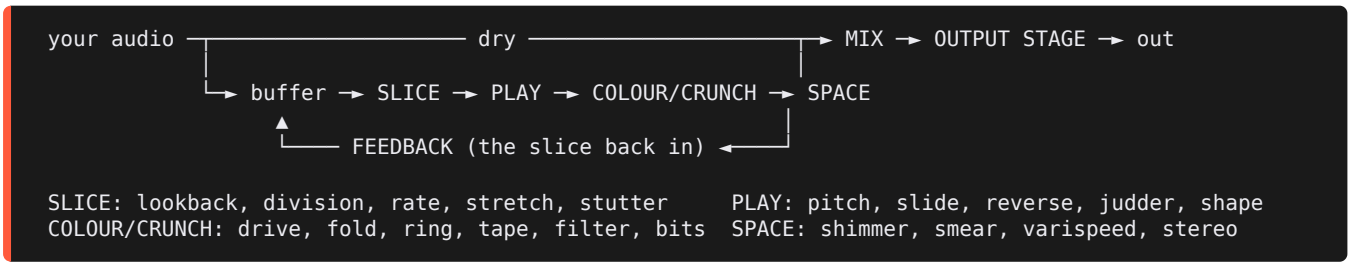

- **It only chops while MPC is playing.** The grid is MPC's song position. When you stop, your audio passes dry.
- An **Act** is one complete sound: every knob, four MODs (LFOs or envelopes), the ENGINE settings and the CHARACTER modes. There are eight, **A to H**. The knobs always show and edit **the selected Act**.

- **SEQ off (freehand):** the selected Act fires on every **Division** beat, if its **Chance** says so.
- **SEQ on:** a sequencer of up to 64 steps decides **which Act** fires on each step. Empty steps stay dry.

2. Install

You need:

- An **Akai Force** (or another first-generation MPC OS unit: MPC Live / Live II, One, X, Key 61, untested).
- **MPC OS 3.x**.
- **Root SSH access** to the device (for example through MockbaMod). Stock MPC OS can't install third-party plugins.
- A computer on the same network, with `scp` and `ssh` (built into macOS, Linux and Windows 10/11).

Steps:

1. **Save your MPC project.** The installer stops and restarts MPC.
2. Download `Loop-SaboteurXXL-0.1.0-mpc-armv7.zip` from the release page and unzip it. You get a folder `Loop-SaboteurXXL-0.1.0`.
3. Find the device's IP address (your router's list, or your mod's network page). Below it's `<device-ip>`.
4. Copy the folder to the device and run the installer:

   ```
   scp -r Loop-SaboteurXXL-0.1.0 root@<device-ip>:/tmp/
   ssh -t root@<device-ip> sh /tmp/Loop-SaboteurXXL-0.1.0/install.sh
   ```

5. Answer **y** when it asks. It checks the device, stops MPC, copies the plugin to `/sdcard/Synths/ANDREALPHEUS - VST - Loop-SaboteurXXL/`, backs up `MPC.settings`, adds the plugin to MPC's plugin list and starts MPC again. (`-y` after `install.sh` skips the question.)

The zip's own `INSTALL.md` also explains how to install by hand.

3. Put it on a track

1. Open the insert effects of the track you want to wreck: an audio track with a loop, a drum track, a submix, or the master.
2. Add a plugin and choose **Loop-SaboteurXXL** (manufacturer **ANDREALPHEUS**).
3. Open it: its screen fills MPC's plugin view, and the **Q-Links follow the page** you're on.

Where to put it:

- **On a drum loop or drum track:** the classic. Slices, stutters and rolls in time.
- **On a pad or melodic part:** use STRETCH, SHIMMER, SMEAR and longer divisions for textures.
- **On a submix or the master:** whole-mix breakdowns and fills. Keep MIX and GLOBAL MIX moderate.

Several instances can run at once, each with its own Acts and pattern.

4. Your first minute with it

1. **Press play** on a project with a loop on that track.
2. You hear the loop with slices layered in: Act A fires every 1/16 at 100% chance, 50% mix.
3. Go to **ACTS SEQ** and turn **PRESET**: try *Jungle Stretch*, *Snare Roll*, *Whip It*, *Pad Stabber*. Each one loads into the selected Act.
4. Tap **B** in the header, pick another preset for Act B.
5. Tap **SEQ ON**. Tap **A** in the header, then tap a few steps; tap **B**, tap a few others. Now the pattern switches between the two Acts.
6. On **COLOUR SPACE**, turn DRIVE, BITS or SMEAR. The readout at the bottom tells you what each move did.

That's the loop: build Acts, stamp them on steps, then shape the steps.

5. The screen: header, pages, readout



The header (top of every page):

- The **LOOP-SABOTEUR XXL** logo.
- **A B C D E F G H**: the Act the knobs edit. The selected Act is orange. Switching Acts loads its values into every knob on every page.

The pages (MPC's page tabs for the plugin):

Page	What
SLICE PLAY	How the slice is taken and played: Lookback, Division, Rate, Stretch, Stutter, Decay, Pitch, Slide, Reverse, Judder, Judder Div, Shape, Chaos
COLOUR SPACE	Tone and destruction: Drive, Fold, Ring Mod, Tape, Feedback, Res, Tone, Bits, Rate, Shimmer, Smear, Varispeed, Stereo

Page	What
ACTS SEQ	Chance and Mix, presets, the sequencer's settings, the 16-step grid
STEP	One step's details: Act, condition, ratchet, freeze, mute, p-locks; page copy / paste
MOD	The selected Act's four MODs
ENGINE	The selected Act's output stage, interpolation, filter mode, frequency split, stereo mode, crunch options, FX on dry
CHARACTER	The selected Act's sixteen effect modes (the original's right-click menus)
GLOBAL	Scale, sequencer direction, Act copy / paste / clear, Panic, banks

The readout (the tall black box at the bottom of every page) says **in words** what the last control did, with its context:

- `ACT B  DRIVE  35%`: a knob of Act B.
- `STEP 10 LOCK  PITCH  +7 st`: a p-lock on step 10 (LOCK EDIT on).
- `ACT A  MOD 1  RATE  1 bar (sync)`: a MOD setting.
- `ACT A  OUTPUT STAGE  Cassette - C90 wow + flutter + hiss`: modes come with the original's description.
- `BANK 3  saved`, `PATTERN CLEARED  (UNDO brings it back)`: what an action did.

Every knob also shows its value under it, in orange.

6. The pages, control by control

SLICE PLAY



Control	What it does	Range
LOOKBACK	How far back in the buffer the slice is taken. Short: "what just happened" echoes. Long: whole phrases from bars ago	1/128 … 4 bars
DIVISION	The slice length, and the grid the Act fires on	1/32, 1/16T, 1/16, 1/8T, 1/8, 1/4, 1/2, 1, 2, 4 bars
RATE	Playback speed of the slice; pitch follows (tracker style)	1/8x … 4x
STRETCH	Granular time-stretch: slower without dropping the pitch	0-100%
STUTTER	A tiny window of the slice looped: buffer-freeze glitch	0-100%
DECAY	Level of each judder repeat against the one before (100% = no decay)	0-100%
PITCH	Semitones (snapped to the scale on GLOBAL when a scale is set)	-24 … +24
SLIDE	Pitch bend applied to each judder repeat	-12 … +12 st
REVERSE	Chance a slice plays backwards	0-100%
JUDDER	Retriggers inside one slice	1-32
JUDDER DIV	Spacing of the retriggers	1/128 … 1/2
SHAPE	Left: soft (low-pass gate decay). Right: snappy transient. Centre: off	-100 … +100%
CHAOS	Random per-slice glitches: holds, drops, flips, jumps	0-100%

COLOUR SPACE



Control	What it does
DRIVE	Saturation before the filter (type on CHARACTER: Tape, Tube, Diode, Fuzz)
FOLD	Wavefolder: metallic harmonics (shape on CHARACTER)
RING MOD	Ring modulator, 20 Hz to 2 kHz (wave on CHARACTER; scale snap on ENGINE)
TAPE	Wow and flutter (mode on CHARACTER)
FEEDBACK	The slice fed back into the buffer, up to 95%: the next slice grabs processed audio
RES	Filter resonance
TONE	Filter. In Tilt mode: DARK / FLAT / BRIGHT. In LP / HP / BP mode: the cutoff (mode on ENGINE)
BITS (CRUNCH)	Bit depth: OFF, then 16-bit down to 2-bit
RATE (CRUNCH)	Sample-rate reduction, shown as the resulting rate (22.1k … 2.0k)
SHIMMER	Octave-up halo (interval on CHARACTER)
SMEAR	Short delay blur at slice edges (character on CHARACTER)
VARISPEED	A DJ brake on each slice (curve on CHARACTER)
STEREO	Per-slice stereo width (mode on ENGINE)

ACTS SEQ

Control	What it does
CHANCE (orange strip)	The selected Act's chance to fire on each beat (freehand, and on steps without a condition)
MIX (white strip)	The selected Act's wet level over the dry
PRESET	Loads a factory preset into the selected Act, with its MODs, ENGINE and CHARACTER. Shows `-` once you edit the Act

Control	What it does
GLOBAL MIX	Scales every Act's mix: one performance fader for the whole plugin
SEQ RATE	How fast the sequencer steps: 1/32, 1/16, 1/16T, 1/8, 1/8T, 1/4, 1/4T, 1/2, 1 bar
SWING	50% straight, about 54% loose, 66% shuffle, 75% dotted
LENGTH	Pattern length, 2-64 steps
RANDOM	What the RANDOM button does (see 7)
SEQ ON	Sequencer on / off (off = freehand)
FREEZE	The buffer stops recording: slices chop what's already in it
BYPASS	No effect. The buffer keeps recording, so un-bypassing chops at once
A B C D	Which 16 of the 64 steps the grid shows
RANDOM (button)	Runs the RANDOM choice
CLEAR	Empties the pattern
UNDO	Brings back the pattern from before the last CLEAR, RANDOM, step clear or page paste / clear
The 16 steps	Tap: put the selected Act on the step. Tap again (same Act): clear it

Reading a step: the Act's letter on orange; a dash when empty; a white slash when muted; dimmed when it's past the pattern's LENGTH. The dots under it: **yellow** p-locks, **blue** freeze, **green** condition, **white** ratchet.

STEP



Everything the desktop plugin does with right-click, shift-click, ctrl-click and alt-click on a step:

Control	What it does
Tap a step / STEP	Select the step (yellow frame and bar). STEP reaches all 64
A B C D	Flip the page

Control	What it does
ACT	The Act on the selected step (`-` = none)
CONDITION	When the step fires (table in 7)
RATCHET	1, 2, 3, 4, 6 or 8 hits inside the step
FREEZE	The buffer holds still while this step plays
MUTE	The step cuts the sound
LOCK EDIT	While on, every knob on every page writes a **p-lock** into the selected step
CLEAR LOCKS	Removes the selected step's p-locks
CLEAR	Empties the selected step
COPY PG / PASTE PG / CLEAR PG	The visible 16 steps, all their settings

MOD



Control	What it does
MOD 1-4	Which of the selected Act's MODs is shown
SYNC	On: RATE in bar divisions, locked to the song. Off: RATE in Hz, free-running
SHAPE	Sine, Triangle, Saw, Square, S&H, Env AHD, Env Follow
RATE	Off, 1/32 … 16 bars (sync) or 0.05 … 30 Hz (free). For Env Follow: the smoothing
DEPTH	-1 … +1 (negative inverts)
TARGET	Which knob it moves: None, or any of 29 lockable controls (alphabetical)
X-TARGET / X-DEPTH	This MOD also scales another MOD's depth
ATTACK / HOLD / DECAY	The AHD envelope's times, 1 ms to 2 s
TRIG	What restarts the envelope: Slice, Active Step, Active + Locks, All Steps

Control	What it does
FOLLOW GAIN	Env Follow's input sensitivity, 1x ... 10x

ENGINE



Control	What it does
OUTPUT STAGE	A character on the whole output while this Act plays: Clean, Cassette, Reel-to-Reel, Damaged, Vinyl, Boombox, AM Radio, VHS Hi-Fi, Bus Comp, Lathe, Phone Bus
OUTPUT MIX / INTENSITY	How much of the output stage, and how strongly
INTERP	How slices are read: Linear, Drop-sample (SP-1200 grit), Cubic (smooth)
FILTER	TONE and RES as Tilt, LP, HP or BP
FREQ SPLIT / CROSSOVER	Effects only on the Low or High band (80 Hz ... 8 kHz split); the other band stays clean
STEREO MODE	How STEREO spreads slices: Random, Ping-Pong, Auto-Pan, Haas
ANTI-ALIAS / MU-LAW	The crunch's character: both on = warm sampler, both off = harsh digital
RING QUANT	Ring mod frequency snapped to the GLOBAL scale
FX ON DRY	DRIVE, TONE, RING MOD, FOLD, CRUNCH also on the dry signal

CHARACTER



The original's right-click modes, per Act. The readout describes each option as you turn.

Knob	Options
LOOKBACK	Fixed, Jittered, Quantised
STUTTER	Fixed, Decaying, Growing
STRETCH	Standard, Paulstretch, Spectral, Formant
DECAY	Linear, Exponential, Logarithmic, Gate
SLIDE	Linear, Exponential, Log, S-Curve
REVERSE	Random, Alternate, Palindrome, Ping-Pong
JUDDER	Even, Accelerating, Decelerating, Random
CHAOS	Uniform, Gaussian, Drunk Walk, Bipolar Snap
DRIVE	Tape, Tube, Diode, Fuzz
FOLD	Sine, Triangle, Asymmetric
RING MOD	Sine, Square, Triangle, Saw
TAPE	Classic, Wow Only, Flutter Only, Extreme
FEEDBACK	Clean, Filtered, Saturated, Ducked
SHIMMER	+1 Oct, +2 Oct, -1 Oct, +5th, +5th/Oct
SMEAR	Blur, Diffuse, Freeze
VARISPEED	Linear, Exponential, Sudden

GLOBAL



Control	What it does
ROOT / SCALE	Snap PITCH to a scale: Off, Chromatic, Major, Minor, Dorian, Phrygian, Mixolydian, Harmonic Min, Whole Tone, Penta Minor, Blues
TRANSPORT	Sequencer direction: Forward, Reverse, Ping-Pong, Random
COPY / PASTE	Copy the selected Act, paste onto another (select it first)
CLEAR / CLEAR ALL	Reset the selected Act / all Acts to the defaults
KEEP MODS ON CLEAR	When on, clearing an Act keeps its MODs
PANIC	Stops the sound now (the slice, any ratchet, the smear tail) and empties the buffer. Settings stay
BANKS 1-16, SAVE, LOAD	See 9

7. The sequencer in depth

Steps and pages. 64 steps, 16 per page (**A B C D**). **LENGTH** sets where the pattern loops, 2 to 64. Steps past the length are shown dimmed. **SEQ RATE** is one step's length.

Stamping. On ACTS SEQ, pick an Act in the header, then tap steps. On STEP, pick a step and turn **ACT**.

Each Act keeps its own Division. The sequencer moves at SEQ RATE, but a step fires at its Act's DIVISION. A step with a 1/32 Act fires twice in a 1/16 step. An Act with a long Division (1 bar) only fires where its grid lands inside the step.

Empty steps play dry. Landing on an empty step stops the slice. If the previous step started a ratchet, the ratchet plays out.

Conditions (STEP → CONDITION):

Condition	The step fires...
`--`	by the Act's own CHANCE
`1:2`, `2:2`	on the 1st / 2nd of every 2 pattern plays
`1:3` ... `3:3`	on that play of every 3
`1:4` ... `4:4`, `1:5` ... `5:5`	the same, for 4 and 5 plays
`1:6`, `1:7`	on the first of every 6 / 7 plays
`PREV`	if the previous step fired
`!PREV`	if the previous step didn't fire
`ONCE`	the first time after you press play, then never until play again
`25%`, `50%`, `75%`	a fresh dice roll every time

A condition on a **muted** step decides how often the mute happens (`50%` = mutes half the time).

Ratchets. 2, 3, 4, 6 or 8 even hits inside the step, all replaying the same slice. **On an empty step** (no Act), a ratchet repeats the beat that just passed, clean and in time: instant drum rolls.

Freeze (per step). While the step plays, the buffer holds still. The steps after it chop the frozen moment.

P-locks. Select a step, turn **LOCK EDIT** on, then move any knob on any page: that value belongs to that step only. The knobs show the step's locked values; the readout says `STEP n LOCK`. Turn LOCK EDIT off to edit the Act again. A p-locked step fires even without an Act (it uses the selected Act's knobs as the base). Lockable: all the SLICE PLAY and COLOUR SPACE knobs, CHANCE, MIX and GLOBAL MIX. **CLEAR LOCKS** removes them.

RANDOM (choose on ACTS SEQ → RANDOM, then tap the RANDOM button):

Choice	What it does
Downbeats, Backbeat (2 & 4), Four on the floor, Offbeats, Syncopated (e&a), Son clave (3-3-2)	Rhythmic placements
Sparse (25%), Busy (75%), Saturated (all)	Density scatters
Euclid E(3) tresillo, E(5) cinquillo, E(7), E(9), E(11)	Euclidean hits spread over the pattern length
Euclid go wild, Pattern go wild	A random pick of the above
Values: Subtle / Not Subtle	New knob values for the Acts in use (musical ranges, at most two "destroyer" knobs hot per Act)
Randomise EVERYTHING	Every Act re-rolled, a new placement and some conditions

Patterns stamp the Acts you have used (and the selected one). **UNDO** brings the pattern back (not the knob values: save a bank first if you like what you have).

8. MODs in depth

Each Act has four MODs. **Only the playing Act's MODs move the sound**: in freehand the selected Act's, with SEQ on the Act on the current step's.

- **LFOs** (Sine, Triangle, Saw, Square, S&H): with SYNC on they lock to the song position, so a 1-bar LFO is in the same place every bar. With SYNC off they run freely in Hz.
- **Env AHD:** an envelope that restarts on TRIG: every **Slice**, every step with an Act (**Active Step**), those plus p-locked steps (**Active + Locks**), or every step (**All Steps**). Set ATTACK, HOLD and DECAY.
- **Env Follow:** follows the input's level; RATE becomes the smoothing, FOLLOW GAIN the sensitivity.
- **TARGET** is added to the knob's value (or its p-lock) when a slice fires: each slice gets the MOD's value at that moment. **DEPTH** sets how far (1 = the whole range), negative inverts.
- **X-TARGET / X-DEPTH:** cross-modulation. This MOD scales another MOD's depth, e.g. a 4-bar sine fading a fast saw in and out.

A MOD with RATE **Off** or TARGET **None** does nothing.

9. Saving: projects and banks

With the project. Everything (all eight Acts, their MODs, ENGINE and CHARACTER, the pattern with its conditions, ratchets and p-locks, every setting) saves inside your MPC project and comes back when you load it. Save the project as usual.

Banks. 16 slots on the device, for moving a whole setup between projects:

1. GLOBAL → tap a slot **1-16**. The readout says `BANK n  empty` or `BANK n  saved (LOAD to recall)`.
2. **SAVE** writes all eight Acts, their MODs, the pattern and the knob settings into that slot.
3. **LOAD** replaces your current setup with the slot's. Save first if you want to keep what you have.

Banks are files on the device: `/sdcard/Loop-SaboteurXXL Banks/Bank 01.lsxxl` … `Bank 16.lsxxl`. They are plain text. Copy them off or share them with `scp`:

```
scp "root@<device-ip>:/sdcard/Loop-SaboteurXXL Banks/Bank 01.lsxxl" .
```

That folder is outside the plugin's folder, so updates and uninstalls don't touch it.

10. Q-Links and MIDI

Every page's controls are on the Q-Links, in reading order (top left first): **1-8 are the first bank, 9-16 the second.** The Act select is the last Q-Link where it fits. The step cells aren't on Q-Links (STEP and the page buttons reach every step).

Page	Q-Links 1-8	Q-Links 9-16
SLICE PLAY	1 LOOKBACK · 2 DIVISION · 3 RATE · 4 STRETCH · 5 STUTTER · 6 DECAY · 7 PITCH · 8 SLIDE	9 REVERSE · 10 JUDDER · 11 JUDDER DIV · 12 SHAPE · 13 CHAOS · 14 ACT
COLOUR SPACE	1 DRIVE · 2 FOLD · 3 RING MOD · 4 TAPE · 5 FEEDBACK · 6 RES · 7 TONE · 8 BITS	9 RATE · 10 SHIMMER · 11 SMEAR · 12 VARISPEED · 13 STEREO · 14 ACT
ACTS SEQ	1 PRESET · 2 GLOBAL MIX · 3 SEQ RATE · 4 SWING · 5 LENGTH · 6 RANDOM · 7 SEQ ON · 8 FREEZE	9 BYPASS · 10 PAGE · 11 RANDOM (button) · 12 CLEAR · 13 UNDO · 14 CHANCE · 15 MIX · 16 ACT

Page	Q-Links 1-8	Q-Links 9-16
STEP	1 PAGE · 2 LOCK EDIT · 3 STEP · 4 ACT · 5 CONDITION · 6 RATCHET · 7 FREEZE · 8 MUTE	9 CLEAR LOCKS · 10 CLEAR · 11 COPY PG · 12 PASTE PG · 13 CLEAR PG · 14 ACT (header)
MOD	1 MOD · 2 SYNC · 3 SHAPE · 4 RATE · 5 DEPTH · 6 TARGET · 7 X-TARGET · 8 X-DEPTH	9 ATTACK · 10 HOLD · 11 DECAY · 12 TRIG · 13 FOLLOW GAIN · 14 ACT
ENGINE	1 OUTPUT STAGE · 2 OUTPUT MIX · 3 INTENSITY · 4 INTERP · 5 FILTER · 6 FREQ SPLIT · 7 CROSSOVER · 8 ANTI-ALIAS	9 STEREO MODE · 10 DRIVE ON DRY · 11 TONE ON DRY · 12 RING MOD ON DRY · 13 FOLD ON DRY · 14 CRUNCH ON DRY · 15 MU-LAW · 16 RING QUANT
CHARACTER	1 LOOKBACK · 2 STUTTER · 3 STRETCH · 4 DECAY · 5 SLIDE · 6 REVERSE · 7 JUDDER · 8 CHAOS	9 DRIVE · 10 FOLD · 11 RING MOD · 12 TAPE · 13 FEEDBACK · 14 SHIMMER · 15 SMEAR · 16 VARISPEED
GLOBAL	1 COPY · 2 PASTE · 3 CLEAR · 4 CLEAR ALL · 5 ROOT · 6 SCALE · 7 TRANSPORT · 8 KEEP MODS	9 PANIC · 10 BANK · 11 SAVE · 12 LOAD · 13 ACT

How a Q-Link acts:

Control	A Q-Link turn
Knob	Turns it
Option list (Division, Preset, Condition…)	One option per Q-Link step
On / off (SEQ ON, FREEZE, LOCK EDIT…)	Right = on, left = off
Action button (RANDOM, CLEAR, UNDO, PANIC, SAVE, LOAD, COPY…)	**Tap these on the screen**: in 0.1.0 a Q-Link turn doesn't fire them

MIDI. On the track's MIDI input, **CC 20-35** move the SLICE PLAY page's Q-Links 1-16 (CC 20 = LOOKBACK, CC 21 = DIVISION, …), and **NRPN n** sets parameter n. Those CCs are used by the plugin only.

11. Recipes

Instant glitch fill on the master (freehand). On Act A: DIVISION 1/16, LOOKBACK 1/16, JUDDER 4, JUDDER DIV 1/64, DECAY 85%, MIX 60%. Keep **GLOBAL MIX** on a Q-Link (ACTS SEQ, Q-Link 2): at 0% it's dry, push it up into the last bar for a fill.

Two-Act groove. Act A: a light chop (DIVISION 1/16, MIX 40%). Act B: a pitched stutter (JUDDER 4, JUDDER DIV 1/64, SLIDE +2, DECAY 85%, REVERSE 30%; four 1/64 repeats fill one 1/16 step, since the next empty step cuts the slice). SEQ ON, LENGTH 16: stamp A on 1, 5, 9, 13 and B on 7, 15. On step 15, CONDITION 1:2 so B only plays every other bar.

Drum rolls without an Act. SEQ ON. On STEP, select step 16 and set ACT `-`, RATCHET **8**. Every bar ends with a clean roll of the beat that just passed. Use RATCHET 3 on step 12 for a triplet stumble.

A melodic pitch run with p-locks. Stamp Act A on steps 13-16. Select 13, LOCK EDIT on, set PITCH +3. Step 14: +5. Step 15: +7. Step 16: +12. LOCK EDIT off. (Set GLOBAL → SCALE to keep the Act's own PITCH in key.)

Lo-fi sampler. ENGINE: INTERP Drop-sample, ANTI-ALIAS off, MU-LAW on, OUTPUT STAGE Vinyl, OUTPUT MIX 60%. COLOUR SPACE: BITS 12-bit, RATE about 11k, TAPE 20%.

Moving filter. ENGINE: FILTER LP. COLOUR SPACE: TONE 60%, RES 50%. MOD 1: SHAPE Sine, SYNC on, RATE 2 bars, TARGET Tone, DEPTH 0.4. Each slice's cutoff follows a 2-bar sweep.

Ducking slices with the input. MOD 2: SHAPE Env Follow, TARGET Mix, DEPTH -0.8, FOLLOW GAIN 3x. Loud hits get drier slices, quiet parts wetter.

Freeze and destroy. Tap **FREEZE** on a moment you like: the buffer holds it. Now turn LOOKBACK, PITCH and REVERSE: you're playing that moment. Tap FREEZE again to let new audio in. For a freeze on chosen steps only, use STEP → FREEZE.

Tape-stop ends. Act C: DIVISION 1/2, VARISPEED 100%, CHARACTER → VARISPEED Exponential. In a 16-step 1/16 pattern, stamp C on steps 9-16: a 1/2 Act fires on the half bar (step 9), and the steps after it keep the brake running. Give step 9 CONDITION 4:4: every fourth bar ends on a brake.

Performance switching. Leave SEQ off and keep **ACT** on a Q-Link (last Q-Link of most pages): turning it switches the whole sound between your eight Acts, live.

12. Troubleshooting

Symptom	Fix
Nothing happens	Press play: it chops on the song grid. With SEQ on, stamp some steps. Check CHANCE, MIX and GLOBAL MIX
Total silence	The **Cage 4'33"** preset is the original's joke: it silences the whole plugin. Select that Act and move any of its knobs, or load another preset into it
A runaway howl or build-up	FEEDBACK, SHIMMER and RES high together build up. Tap **PANIC** (GLOBAL) and lower them
Only dry on some steps	Empty steps play dry. Stamp an Act, or add a ratchet / p-lock
A step never fires	Check its CONDITION, MUTE, the Act's CHANCE, and that its Act's DIVISION lands inside the step
The knobs change "by themselves"	LOCK EDIT is on: the knobs show the selected step's p-locks. Turn it off
RANDOM does nothing	Choose a RANDOM mode, then **tap** the RANDOM button (Q-Link turns don't fire buttons in 0.1.0)
BANK LOAD says empty	Nothing was saved in that slot. The readout shows a slot's state when you tap it
Crackles	Too much CPU in a busy project. Try Clean output stages, less STRETCH and SMEAR, or a longer Division, and report it under Issues
It isn't in the plugin list	Re-run `install.sh`, and check `MPC.settings` was restored if MPC came up with default settings

Report anything odd at github.com/sunskiefer/Loop-SaboteurXXL/issues, with what you did and what the readout said.

13. Update and uninstall

- **Update:** download the new zip and run its `install.sh` the same way. It upgrades in place. Projects and banks stay.
- **Uninstall:**

  ```
  ssh -t root@<device-ip> sh /tmp/Loop-SaboteurXXL-0.1.0/uninstall.sh
  ```

  It stops MPC, removes the plugin folder and its plugin-list entry, and starts MPC again. Projects that used it load without it. Your banks folder is kept.

14. Differences from the desktop plugin

- **The screen:** right-click menus and modifier clicks are on the STEP, ENGINE and CHARACTER pages. The scrolling waveform strip and the knobs' cyan MOD rings aren't drawn (animated pictures cost screen CPU on MPC). The readout tells you what changed instead.
- **Presets:** the 19 factory presets are there. The user preset files (`.lpsbact`) and the XML Act / bank import-export are replaced by the 16 banks.
- **Not ported:** the lookahead output delay (MPC doesn't compensate plugin latency), UI scale, tooltips, grid accent, page-follows-playhead, and the momentary freeze mode (FREEZE is a toggle: tap on, tap off).
- **The engine:** unchanged, except that MODs of Acts that aren't playing catch up once per audio block instead of every sample. They don't touch the sound until their Act plays, so you hear no difference.

15. Credits and licence

- **Loop Saboteur** (the effect: its sound engine, effects, Acts, sequencer, MODs, output stages, factory presets, randomisers and the design of its interface): **Stephen McLeod Blythe / AMFAS** (clickysteve), GPL-3.0. All credit for how this sounds goes to him.
- **Art and build:** Claude (Anthropic).
- **Developer:** L'Cronx.
- **VST2 wrapper, skin generator and installer:** sd88me's mpc-vst-plugins (MIT).
- **Fonts:** Anton (The Anton Project Authors) and Titillium Web (Accademia di Belle Arti di Urbino), SIL Open Font License 1.1.

Loop-SaboteurXXL is free software under the **GNU GPL v3.0 or later**. Source: github.com/sunskiefer/Loop-SaboteurXXL. It is an unofficial port, not affiliated with or endorsed by Stephen McLeod Blythe / AMFAS or Akai Professional.