

How to Import GalTone Studio Presets

Thanks for ordering from Galtone Studio. This guide explains how to import 3rd party presets into the Valeton GP-5 using the Valeton Suite app.

Requirements:

- Valeton GP-5 (firmware v1.0.3 or later)
- Valeton Suite app (iOS/Android/Windows/macOS)
- NAM and preset files (included in the downloaded ZIP file)

Step-by-Step Guide


1. Activate Bluetooth Mode on the GP-5


On the main display, long-press the PARA knob to toggle Bluetooth pairing mode. A Bluetooth icon will appear, indicating it's ready.



2. Connect via Valeton Suite App


Open the Valeton Suite app on your phone or desktop. Select GP-5 as the device. Wait for the device to appear, then tap to connect.

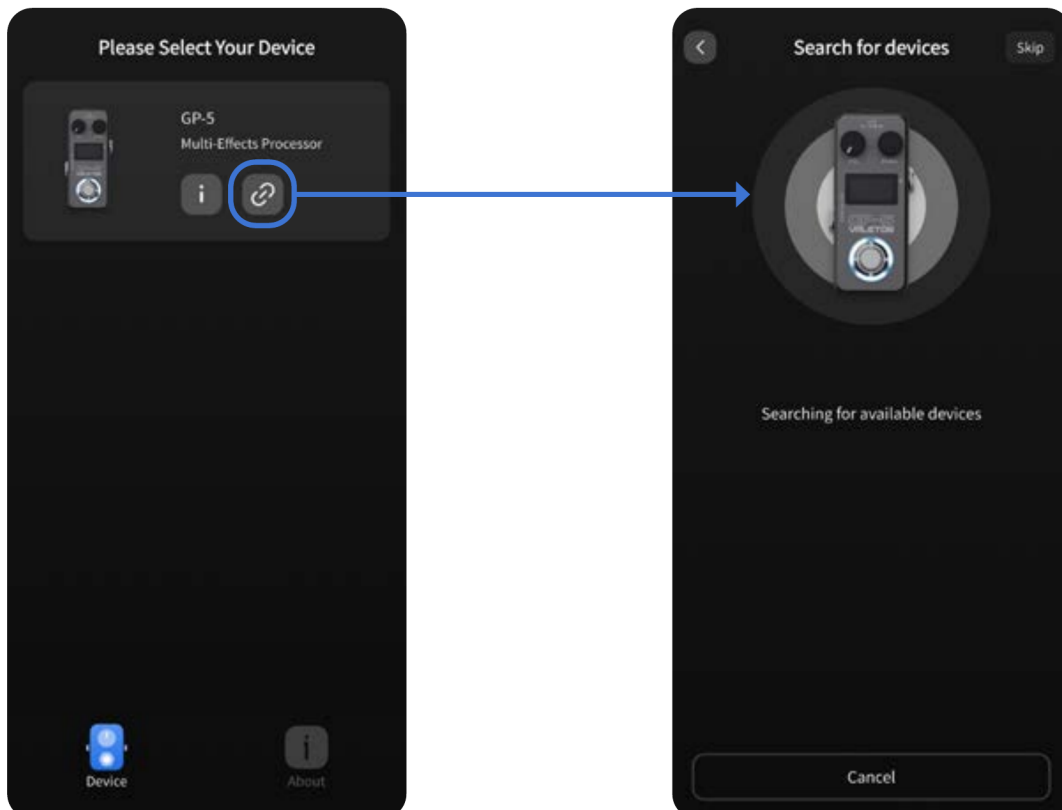

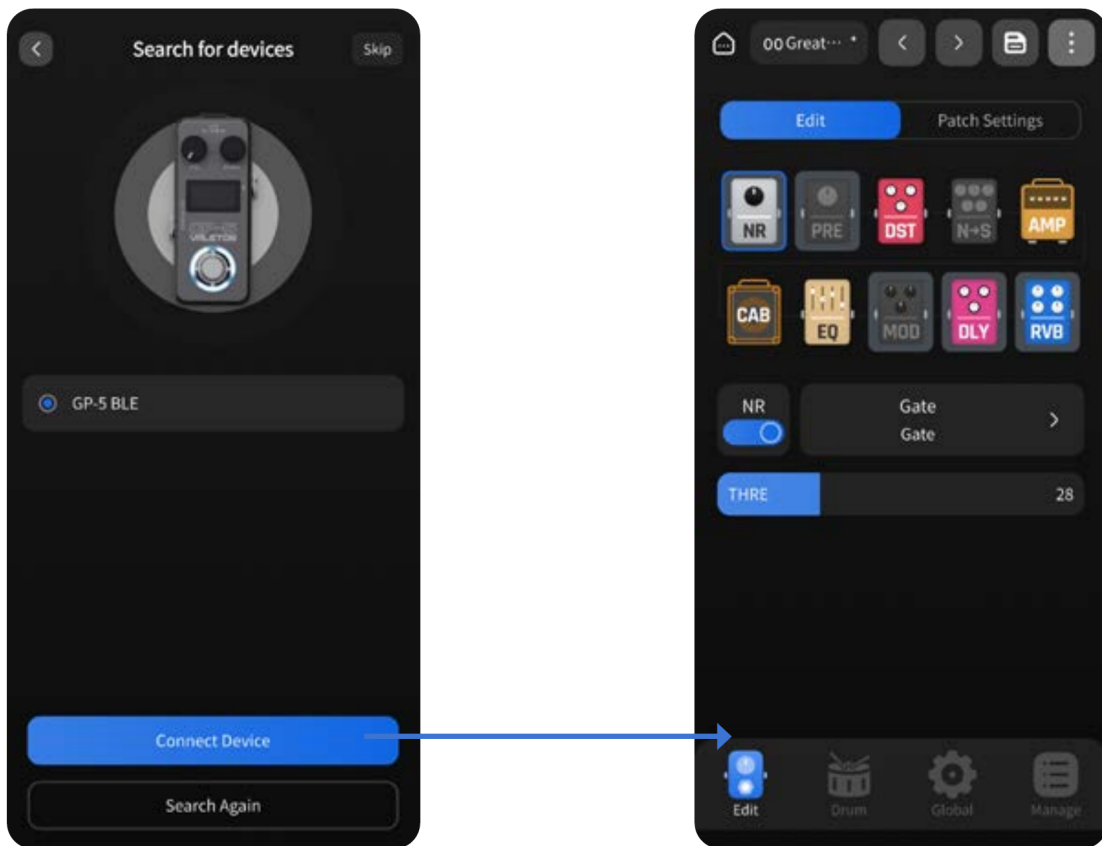


3. Import NAM/SnapTone Files* (if included in your pack)

- 1) Once connected, click the '**N→S**' icon. Then select 'import SnapTone File'.

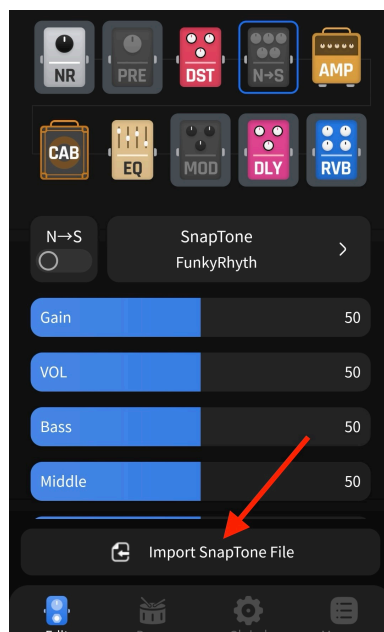


- 2) Import the NAM files provided with your pack (*max 10 at once*). It is highly recommended to use **empty slots** if available. Otherwise, you may overwrite existing NAM files (but make sure to have a backup). To import NAM files, click **IMPORT**.

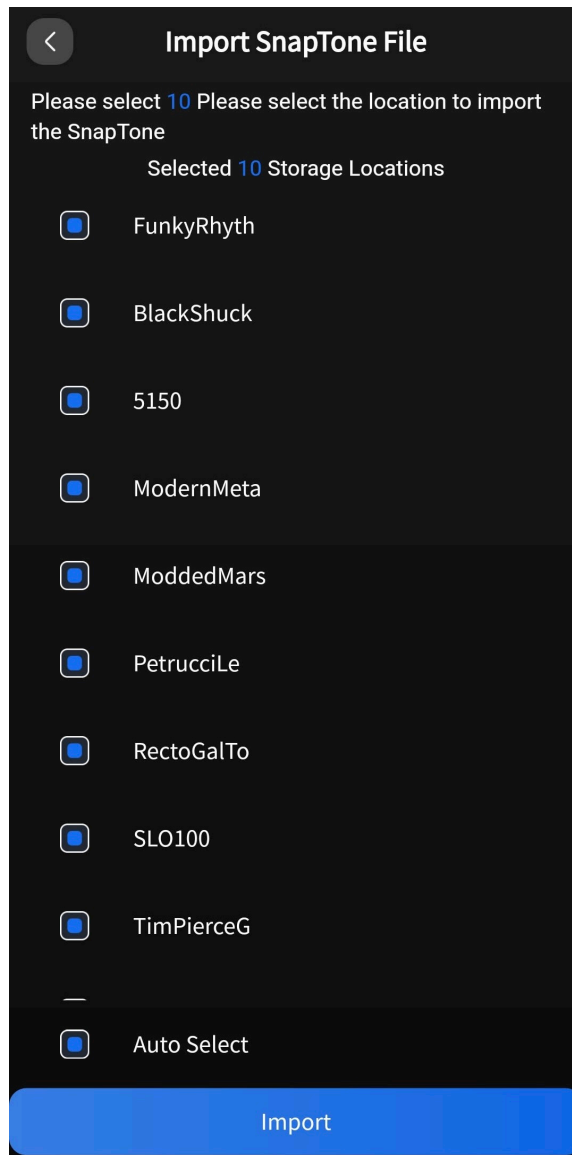


4. Import Presets:



Next step is to import presets included in a pack. In order to do that, go to the top right corner (3 dots), click, and hit IMPORT.

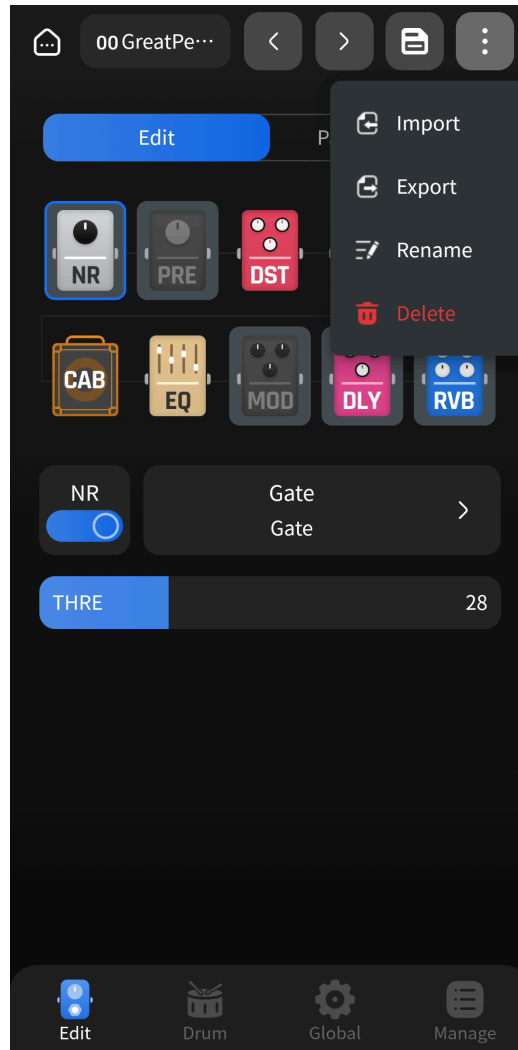

2) Next select presets from zip file that you received:

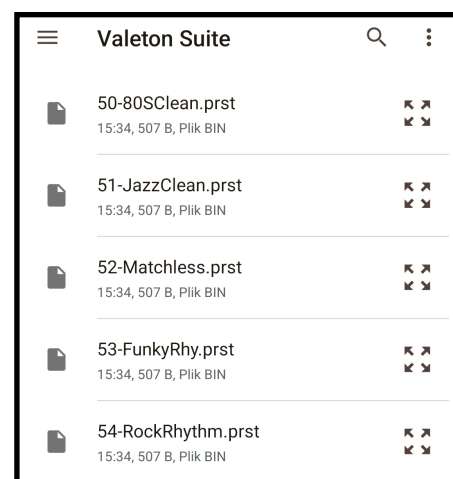


3) After importing, the NAM file should be added automatically, but double-check to ensure everything is in place.

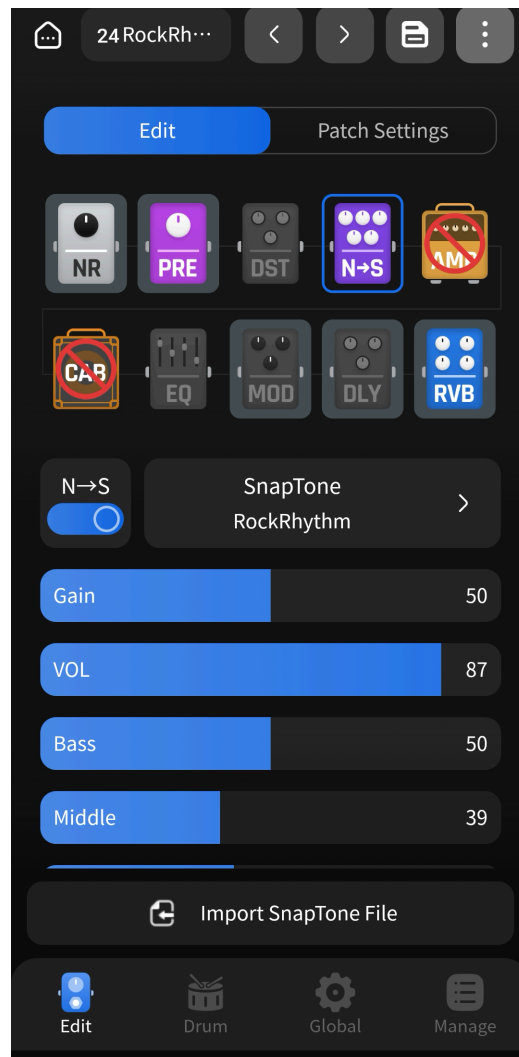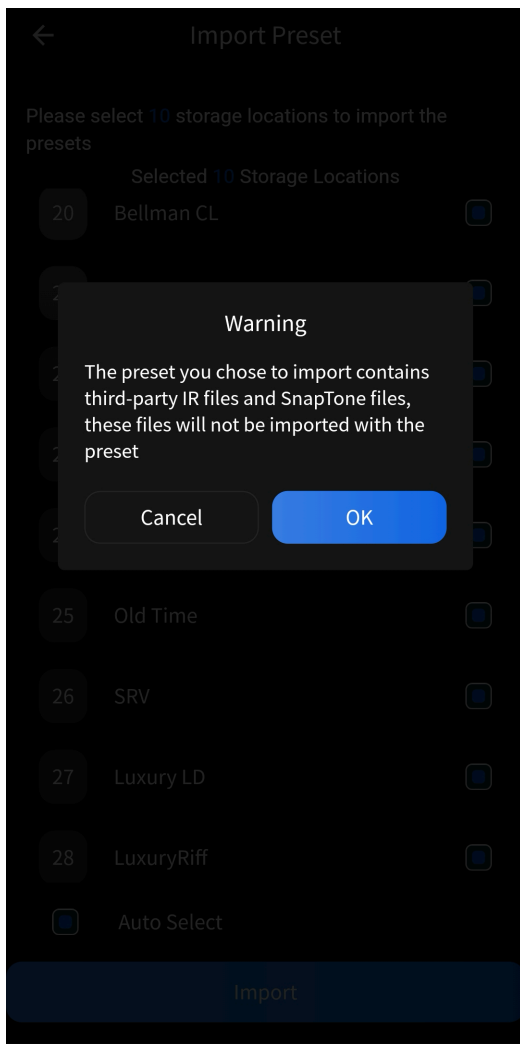

IMPORTANT:

Most of our presets utilize the **CTL switch**, which lets you turn on/off up to **three effects at once**.

This is mainly used for switching from rhythm to lead tones within a single preset. If you want to use that functionality, go to **GLOBAL** and change your **FOOTSWITCH MODE** to **CTL**.

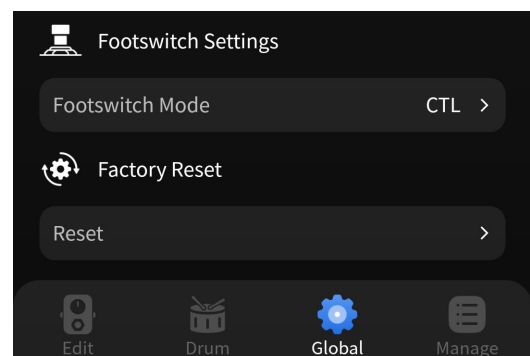

Need Help or Want to Hear the Tones?

You can find demos of all our preset packs on our YouTube channel: **@GaltoneStudio**. All demos are recorded in stereo directly into an audio interface (using TRS → 2x mono cable) into an **Audient EVO16** — with no post-production. Input Level: **0 dB**.

If your presets sound drastically different, double-check your setup and feel free to reach out to us: kontakt@galtonestudio.pl

Enjoy Your Presets!

Peter,
GalTone Studio