


Practical week 4

Topology:

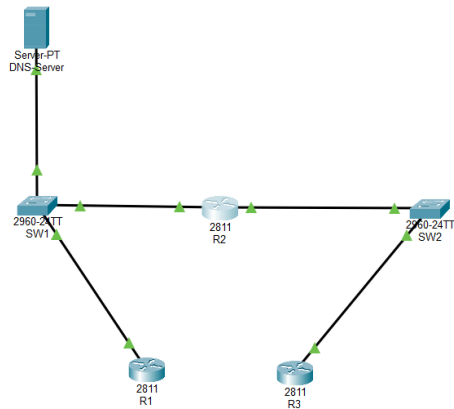

Task 22

```
R2#ping 10.10.10.10
```

```
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)
```

Task 23


I went through the OSI layers and identified at the physical layer the cable had been taken out, so I installed a cable then from R2 to SW1 and I turned on the F0/0 Interface. In the network layer, one of the interfaces did not have an IP address.

Task 24


The root cause of the connectivity failure was the cable and the interface was off.

Task 25

1.) Screenshot of the topology failed topology :

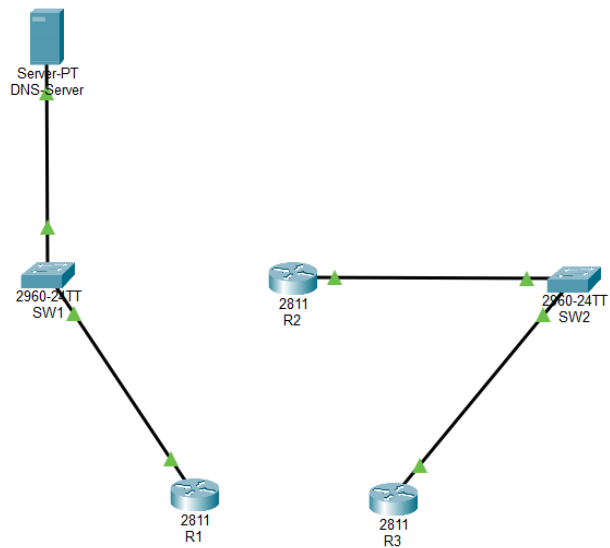

2.) topology after the fix:

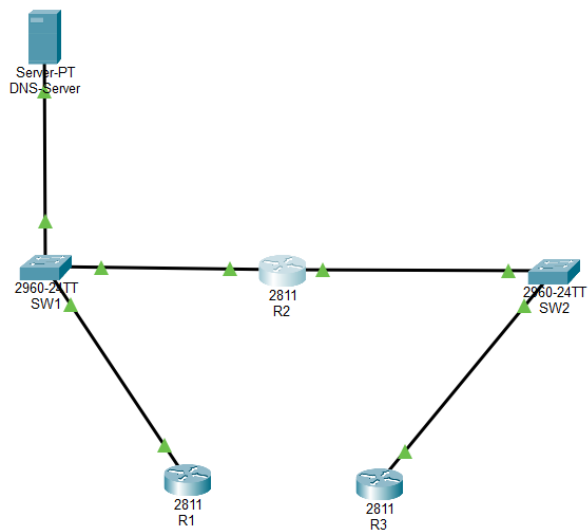

Task 26

```
R2#ping 10.10.10.10
```

```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
```

```
.!!!!
```

```
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/2 ms
```

Task 27

The physical and data link