

How it works, in short


- **One shared record.** Change something and everyone sees it within a few seconds – the Timeline, the map and the print-outs all update.
- **Works on a phone or a computer.** Open the link: gc500-production.up.railway.app/v/Coates-GC500-2026
- **That link is look-and-print only.** To change deliveries you need the edit link – Andrew sends that separately. Please keep it to yourselves.
- **Every change carries a name and a time**, and the schedule's original words stay underneath, so anything can be put back.

1 Driver print-outs

1 Open the day

Tap **Timeline** at the top, then pick the day (tap its card, or use Prev / Next / Today).


Under the photo is the **Day Documents** panel: Pre-start, Drivers, Install, Email and Edit.

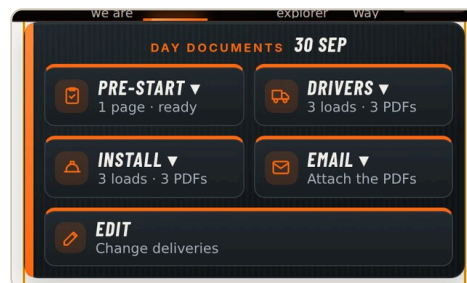

2 Tap Drivers

Choose **All loads** – one PDF per truck, plus one file with every page to print in one go.

Or pick **one load** by its reference (e.g. Load 1 · GN20).

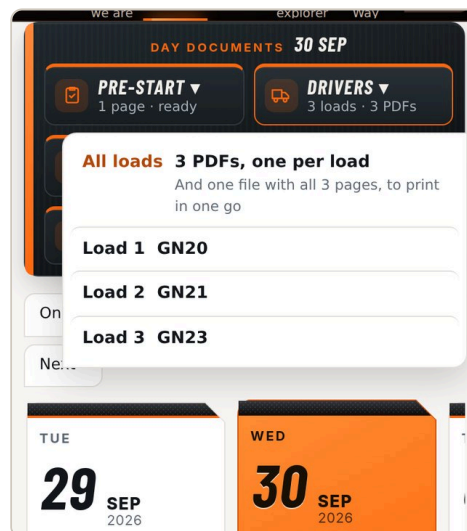

3 Print, save or email

Give it a few seconds to make the PDFs. Then:


Open / Print – all pages in one file, ready to print.

Email (attach) – sends the PDFs as attachments.

Save – keeps the files on your phone or computer.

Each load also has its own **Open** and **Save**.

Print on **A4 at actual size (100%)**. Each load is one A4 page.

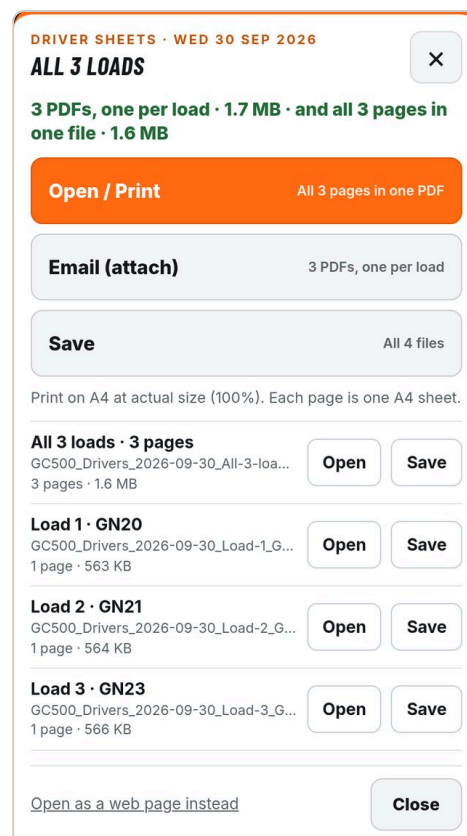


4 Email the drivers

On the panel, tap **Email** and pick **Drivers**. On a phone, choose **Outlook** – the PDFs go as attachments (no links).

On a computer it saves the PDFs and opens a new email – just drag them in. **Copy the email text** gives you the wording if you need it.

Install sheets and the Pre-start work exactly the same way.

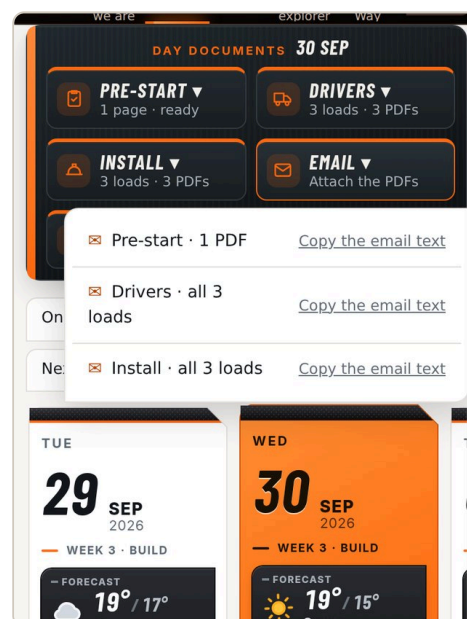

5 What the driver gets

One A4 page per load:

- the reference, big, and what's on the truck with its asset number
- where it goes, with a QR code to navigate
- photos: the whole site, from the road, close-up and the master plan
- safety: PPE, JSEA, Take 5 and the Coates Life Saving Rules
- the SWMS QR code and the contacts

A ruled line means "not recorded yet" (e.g. load time, carrier) – write it in by hand.

Coates
INDUSTRIAL SOLUTIONS

DELIVERY DRIVER SHEET - GC500 2026
Delivery · Wed 30 Sep 2026

GC500-DRV-01
LOAD 1 OF 3

DELIVER
GN20
1 x 350kva → S01

DATE	Wed 30 Sep 2026
LOAD TIME	
CARRIER	
ON SITE	After 07:00
LOAD	Own page · no shared load recorded


ON THE TRUCK

WHAT	ASSET NO.	ALSO ON IT
1 x 350kva S01 (Continental)	1276761	None on the schedule

WHERE IT GOES

LOCATION	S01
SECTION	S13
RESIDE	B512
FROM GATE	south-east, about 525 m
WAY IN	Sundale Bridge → Tedder Ave Access Point, gate G10
ESCORT	Do not drive through the park unescorted

PHOTOS



Whole siteFrom the roadClose-upMaster plan

SAFETY

PPE: Hi-vis, Safety glasses, Steel-cap boots · Site hours 07:00-17:00 Monday to Friday

JSEA REQUIRED

The driver must complete a Job Safety and Environmental Analysis (JSEA) before unloading. This applies to every load. No JSEA, no unload.

TAKE 5

Take 5 before every new task. Stop, look, assess, control, then proceed – before each new task and again whenever the job or conditions change (a new unit, a new position, a new crew member, weather, the public).

COATES LIFE SAVING RULES – read and followed on every task

Risk Assessment I will not commence any work that I am unfamiliar with, until I have been given the necessary training and equipment, and I have been assessed by a competent person.	High-Risk Work I will not commence any High-Risk Work without a risk assessment being completed and without having signed onto the applicable Safe Work Method Statement (SWMS).	Training and Competency I will be instructed, trained, competent and hold the required certification and licenses to conduct the task.
Fit for Work When I commence work, I will be physically fit, and not impaired by fatigue, illness, distraction, drugs or alcohol, and will wear the required personal protective equipment (PPE) as determined for the task or site rules.	Tools and Equipment I will only use tools and equipment that are fit for purpose and for which I am trained, competent and authorized. I will report any damaged or defective equipment, a missing tool, or a removed from service.	Critical Risk Indicators When I commence a work activity related to a Coates Top 10 Critical Risk, I will ensure that I have read and understood the relevant regulations and standards, and that I have been trained, instructed and supervised by a competent person.

DOCUMENTS



Loading and unloading at third party sites
GC500-DRV-008.dfy
34 pages

CONTACTS

COATES SITE: Andrew Fisher 8429 352 788	COATES OFFICE: Ross Saxeby (07) 3299 9797	EDM SAFETY & TRAFFIC: Steve Haines 0487 734 398
EDM SITE MANAGER: John Brett 0433 809 117	EMERGENCY: 800	

Coates Industrial Solutions · GC500 2026 · Author: Andrew Fisher

From the GC500 record, 28 Sep 2026 08:05 AEST · A ruled line means not yet recorded

GC500-DRV-01 · Wed 30 Sep 2026 · Load 1 of 3

2 Changing a delivery (needs the edit link)

1 Open Change deliveries

Timeline → pick the day → tap **Edit** (Change deliveries) on the Day Documents panel.

Put your name in **Recording as** – every change carries your name and the time.

Everything due in and out that day is listed. Tap **Change** next to the one you want.

This screenshot shows the 'Wed 30 Sep 2026' delivery change interface. At the top, there's a date selector for '30/09/2026' with navigation arrows. Below it, the date 'Wed 30 Sep 2026' is displayed, followed by 'Week 3 · Build · 3 due in · 0 due out'. A button 'Open on the Timeline' is present. The 'Recording as' field is set to 'Brendan', with a note 'every change carries this name and the time'. A green dot indicates 'Saved to the shared record · everyone sees it within seconds'. The main section is titled 'Due in on Wed 30 Sep (3)' and lists a delivery: 'GN20 350kva · Generators S01'. It shows 'Due in Wed 30 Sep', 'Due out no day', and 'Asset no. 1276701'. A button 'ON THE MASTER PLAN' is visible. At the bottom, a 'Change' button is partially visible.

2 Change what you need

Or pick the **Type** (e.g. generators) then the **Reference** – only what's on the job is in the lists.

Due in / Due out – pick the new day. **Back to the plan day** undoes it.

Asset numbers – add or remove. If a number is already on another reference, it tells you and offers to move it.

This screenshot shows the '350kva (1)' delivery change interface. At the top, there's a dropdown menu for '350kva (1)'. Below it, the 'REFERENCE' section shows 'GN20 · 350kva S01 · due in Wed 30 Sep'. The main section is titled 'S01 Generators · 350kva' and shows 'GN20' with a radio button for 'No delivery record'. A button 'Open the full record' is present. The 'DUE IN' section shows '30/09/2026' with a calendar icon and a 'Back to the plan day' button. Below it, a note says 'Wed 30 Sep 2026 · the plan says Wed 30 Sep'. The 'DUE OUT' section shows 'dd/mm/yyyy' with a calendar icon and a 'Back to the plan day' button. Below it, a note says 'the plan gives no day'. The 'ALLOCATED ASSET NUMBERS' section shows '1276701 the schedule, the rental system' with a red 'X' icon. Below it, there's a button 'add a Coates asset number' and an 'Add' button. At the bottom, a note says 'A number on another reference is never added here quietly: the page says where it is and offers to move it.'

3 Description, where it goes, the map

Type over **Description** or **Where it goes**. Empty the box to go back to the schedule's words.

Pin it on the map opens the map: tap where it's going and you're brought back.

There's **no Save button** – each box saves when you tap out of it. Everyone sees it within seconds, and the print-outs pick it up.

DESCRIPTION
S01
the schedule says "S01" · empty the box to go back to it
WHERE IT GOES
GN20 S01
the schedule says "GN20 S01" · empty the box to go back to it
PIN ON THE MAP
ON THE MASTER PLAN Pin it on the map
Opens the Map explorer: tap where GN20 is going and it is placed there, then this page comes back. The master plan already places GN20; a pin put here is kept beside it and the master plan still leads.
Each box saves when you leave it — there is no Save button. The schedule's own words and days stay underneath.

Add a new one
Something turning up that the schedule does not carry: it gets a reference of its own, its days and where it goes.

ON THE MASTER PLAN **PIN ON THE MAP**
Opens the Map explorer: tap where GN20 is going and it is placed there, then this page comes back. The master plan already places GN20; a pin put here is kept beside it and the master plan still leads.
Each box saves when you leave it — there is no Save button. The schedule's own words and days stay underneath.

Add a new one
Something turning up that the schedule does not carry: it gets a reference of its own, its days and where it goes.
Add a new one

Changes on this day
Nothing has been changed for this day's references yet. A change made here, on the Timeline or in a drawer shows here with who made it and when.

4 Check it, or put it back

Changes on this day lists who changed what and when, with **Put back** to undo.

Something turned up that's not on the schedule? Use **Add a new one** – give it a reference, a description, its days and where it goes.

A few tips

- Print on the day or the day before, so the sheets carry the latest changes.
- If a sheet looks wrong, fix the record (Edit) and print again – don't hand-fix the paper.
- The **Record** light at the top right should read **Live** (green). Out of signal, your changes wait on your phone and go up when you're back in range.
- Stuck? Give Andrew a call on 0429 352 788.