


Screenshots

1) User EXEC mode:

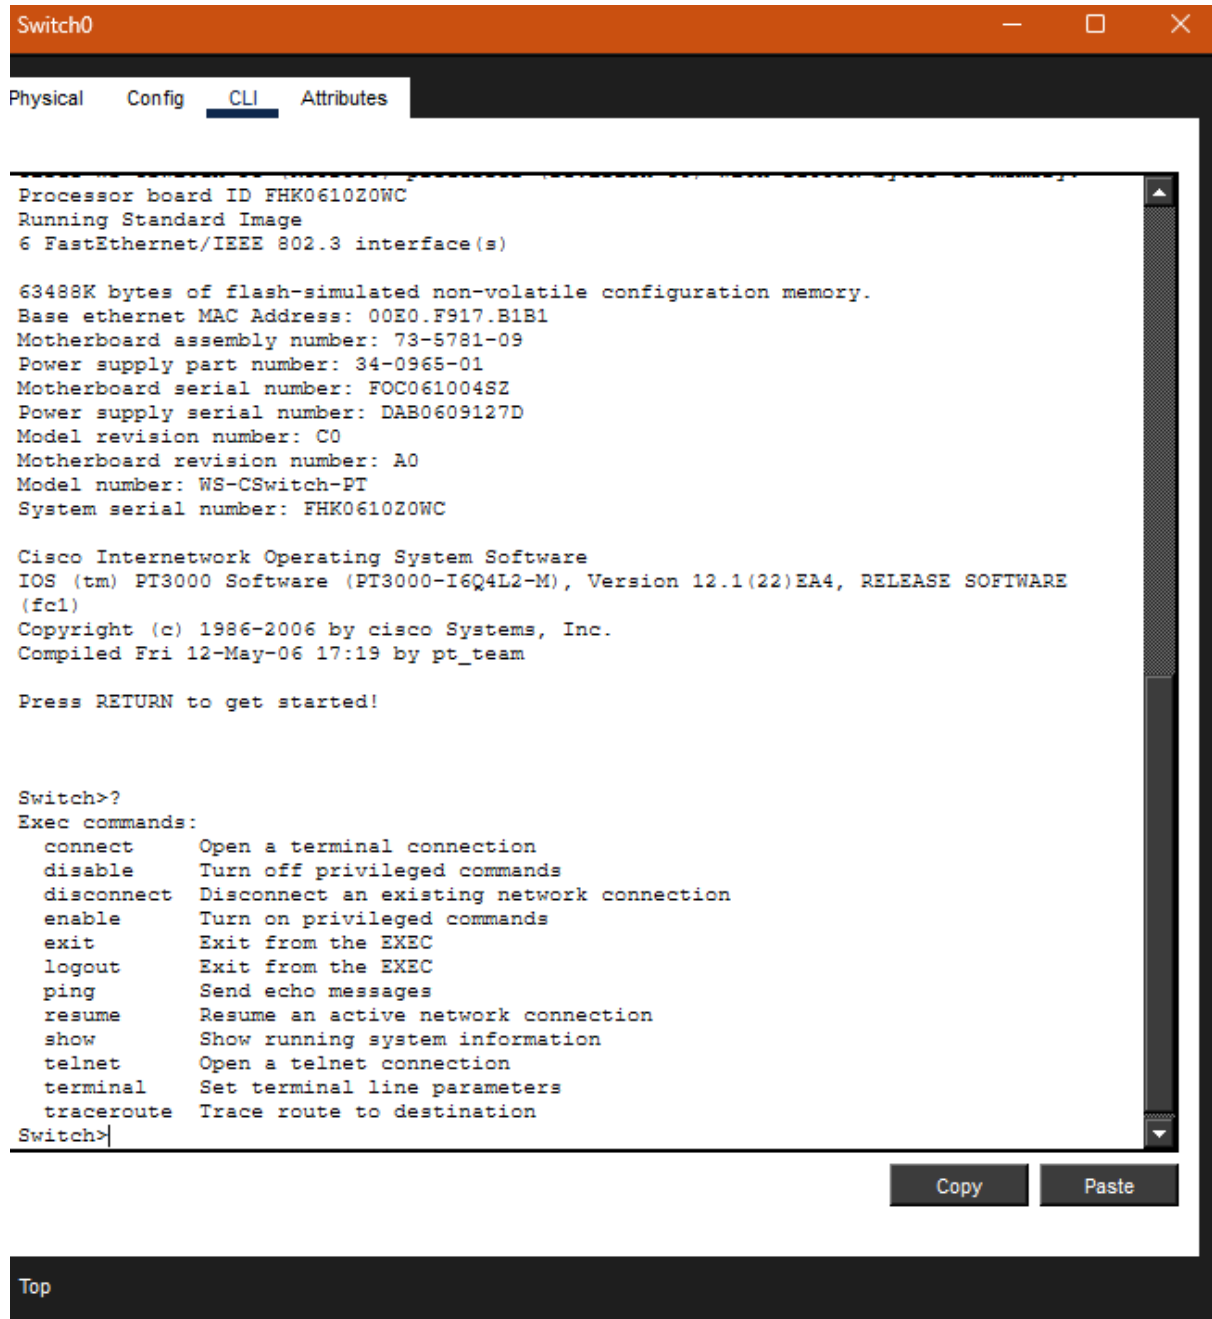

2) Privileged EXEC mode:

The screenshot shows a web-based CLI interface for a device named 'Switch0'. The interface has a top navigation bar with tabs for 'Physical', 'Config', 'CLI', and 'Attributes'. The 'CLI' tab is active. The main content area displays the command-line interface. It starts with a list of 'Exec commands' including 'connect', 'disable', 'disconnect', 'enable', 'exit', 'logout', 'ping', 'resume', 'show', 'telnet', 'terminal', and 'traceroute'. Below this, the user enters 'Switch>en', followed by 'Switch>enable' twice. The prompt changes to 'Switch#?', indicating that the user has entered privileged EXEC mode. A second list of 'Exec commands' is shown, including 'clear', 'clock', 'configure', 'connect', 'copy', 'debug', 'delete', 'dir', 'disable', 'disconnect', 'enable', 'erase', 'exit', 'logout', 'more', 'no', 'ping', 'reload', 'resume', 'setup', 'show', and '--More--'. At the bottom right of the CLI window, there are 'Copy' and 'Paste' buttons. A 'Top' link is located at the bottom left of the interface.

```
Switch0
Physical Config CLI Attributes
Exec commands:
  connect  Open a terminal connection
  disable  Turn off privileged commands
  disconnect Disconnect an existing network connection
  enable   Turn on privileged commands
  exit     Exit from the EXEC
  logout   Exit from the EXEC
  ping     Send echo messages
  resume   Resume an active network connection
  show     Show running system information
  telnet   Open a telnet connection
  terminal  Set terminal line parameters
  traceroute Trace route to destination
Switch>en
Switch>enable
Switch>enable
Switch#?
Exec commands:
  clear      Reset functions
  clock      Manage the system clock
  configure  Enter configuration mode
  connect    Open a terminal connection
  copy       Copy from one file to another
  debug      Debugging functions (see also 'undebug')
  delete     Delete a file
  dir        List files on a filesystem
  disable    Turn off privileged commands
  disconnect Disconnect an existing network connection
  enable     Turn on privileged commands
  erase      Erase a filesystem
  exit       Exit from the EXEC
  logout     Exit from the EXEC
  more       Display the contents of a file
  no         Disable debugging informations
  ping       Send echo messages
  reload     Halt and perform a cold restart
  resume     Resume an active network connection
  setup      Run the SETUP command facility
  show       Show running system information
--More--
```

Copy Paste

Top

3) Global configuration mode

Switch0

Physical Config **CLI** Attributes

```
ping          Send echo messages
resume       Resume an active network connection
show         Show running system information
telnet       Open a telnet connection
terminal     Set terminal line parameters
traceroute   Trace route to destination
Switch>en
Switch>enable
Switch>enable
Switch#?
Exec commands:
clear        Reset functions
clock        Manage the system clock
configure    Enter configuration mode
connect      Open a terminal connection
copy         Copy from one file to another
debug        Debugging functions (see also 'undebug')
delete       Delete a file
dir          List files on a filesystem
disable      Turn off privileged commands
disconnect   Disconnect an existing network connection
enable       Turn on privileged commands
erase        Erase a filesystem
exit         Exit from the EXEC
logout       Exit from the EXEC
more         Display the contents of a file
no           Disable debugging informations
ping         Send echo messages
reload       Halt and perform a cold restart
resume       Resume an active network connection
setup        Run the SETUP command facility
show         Show running system information
ssh          Open a secure shell client connection

Switch#
Switch#
Switch#configure
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#
```

Copy Paste

Top

4.) Complete topology

