


JJ H Packet tracer week 1 20260176

Contents


JJ H Packet tracer week 1 20260176.....	1
Task 1:	1
Task 2:	2
Task 3:	3
Task 4:	4

Task 1: Connect device to console

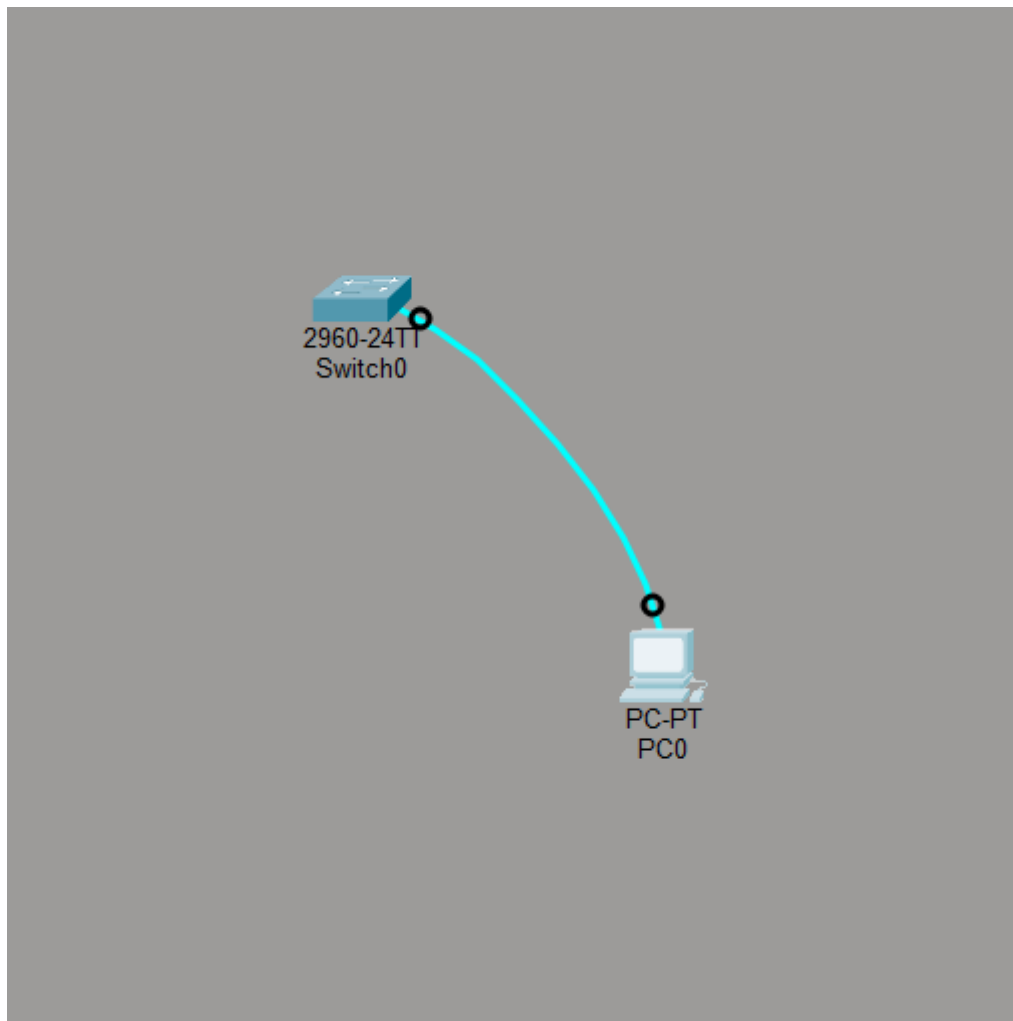


Task 2: Explore User EXEC mode and exploring 'show' commands

Exploring EXEC mode by using ? to show commands

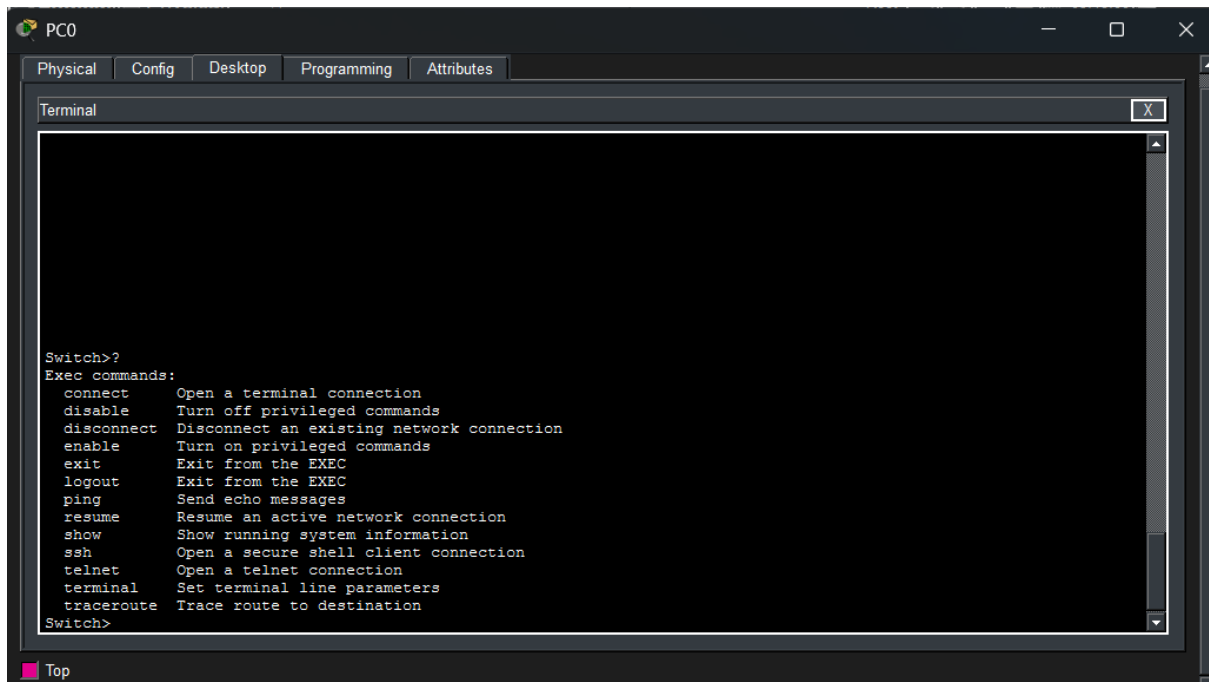

Show commands, some are too long to fit in one screenshot, but you can use "show ?" to display all show commands

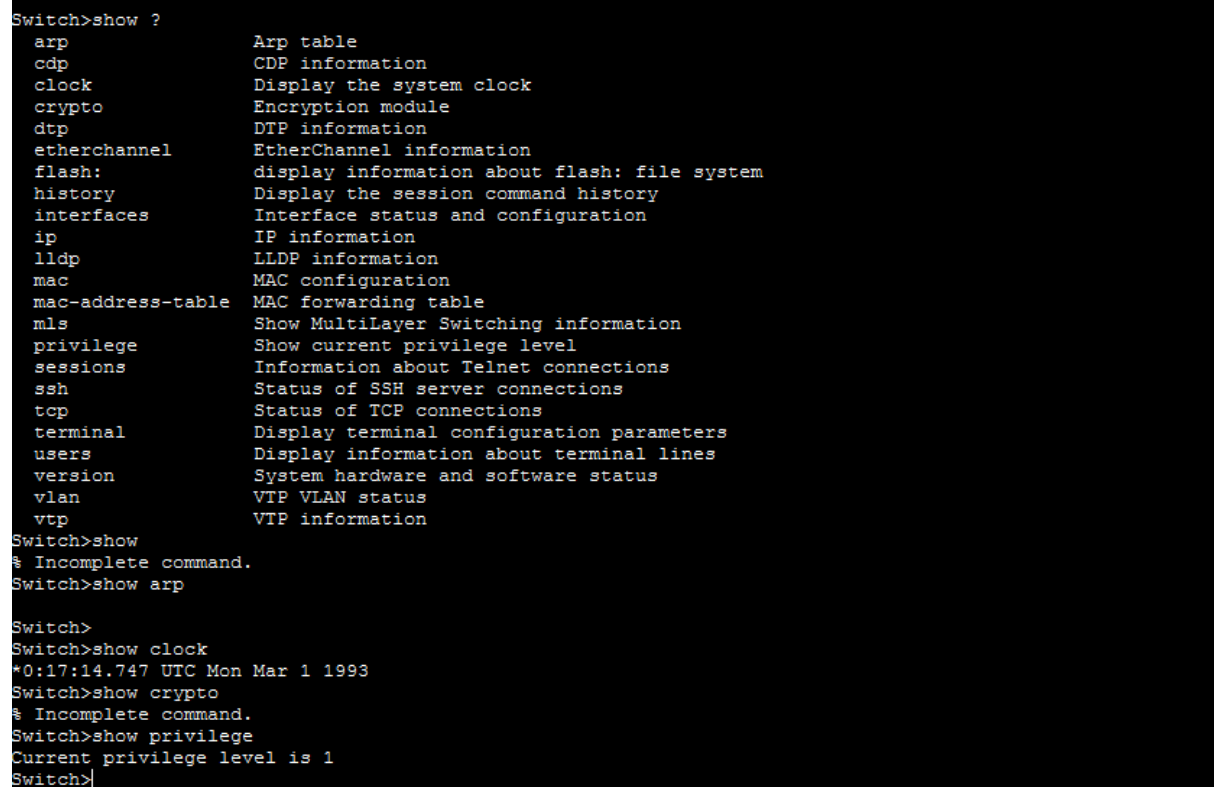

Task 3: Move into global configuration mode and explore the commands available

You enter global config mode by using “enable”

```
Switch>enable
Switch#en
Switch#enable c?
% Unrecognized command
Switch#enable c?
% Unrecognized command
Switch#?
Exec commands:
clear          Reset functions
clock          Manage the system clock
configure      Enter configuration mode
connect        Open a terminal connection
copy           Copy from one file to another
debug          Debugging functions (see also 'undebug')
delete         Delete a file
dir            List files on a filesystem
disable        Turn off privileged commands
disconnect     Disconnect an existing network connection
enable         Turn on privileged commands
erase          Erase a filesystem
exit           Exit from the EXEC
logout         Exit from the EXEC
more           Display the contents of a file
no             Disable debugging informations
ping           Send echo messages
reload         Halt and perform a cold restart
resume         Resume an active network connection
setup          Run the SETUP command facility
show           Show running system information
ssh            Open a secure shell client connection
telnet         Open a telnet connection
terminal       Set terminal line parameters
traceroute     Trace route to destination
undebug        Disable debugging functions (see also 'debug')
write          Write running configuration to memory, network, or terminal

Switch#
Switch#
Switch#clock
% Incomplete command.
Switch#manage clock
      ^
% Invalid input detected at '^' marker.

Switch#ping
Protocol [ip]: a
% Unknown protocol - "a", type "ping ?" for help
```

(? Now shows a lot more commands, though I cannot use some as I do not have a full network set up to ping or open connections right now)

Task 4: Involves basic config management, and as labelled in week 1, to use “Show running config”

Show running config isn't actually the command, it is just “show running”

```
Switch#show running config
      ^
% Invalid input detected at '^' marker.

Switch#show running
Building configuration...

Current configuration : 1080 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
!
interface FastEthernet0/3
!
interface FastEthernet0/4
!
interface FastEthernet0/5
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
!
interface FastEthernet0/12
!
```

PC0

Physical Config Desktop Programming

Terminal

```
!
interface FastEthernet0/5
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
!
interface FastEthernet0/12
!
interface FastEthernet0/13
!
interface FastEthernet0/14
!
interface FastEthernet0/15
!
interface FastEthernet0/16
!
interface FastEthernet0/17
!
interface FastEthernet0/18
!
interface FastEthernet0/19
!
interface FastEthernet0/20
!
interface FastEthernet0/21
!
interface FastEthernet0/22
!
interface FastEthernet0/23
!
interface FastEthernet0/24
!
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
  no ip address
  shutdown
!
!
!
!
line con 0
!
line vty 0 4
  login
line vty 5 15
  login
!
!
!
!
end
```

Show running gave me all the port interfaces of PC0