


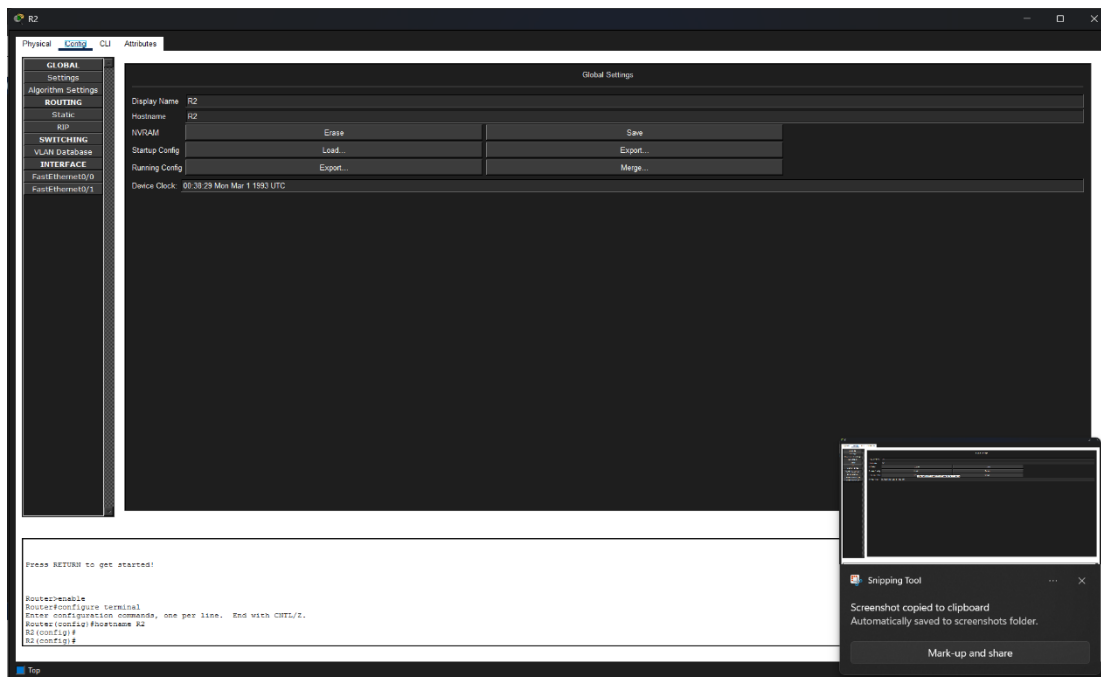
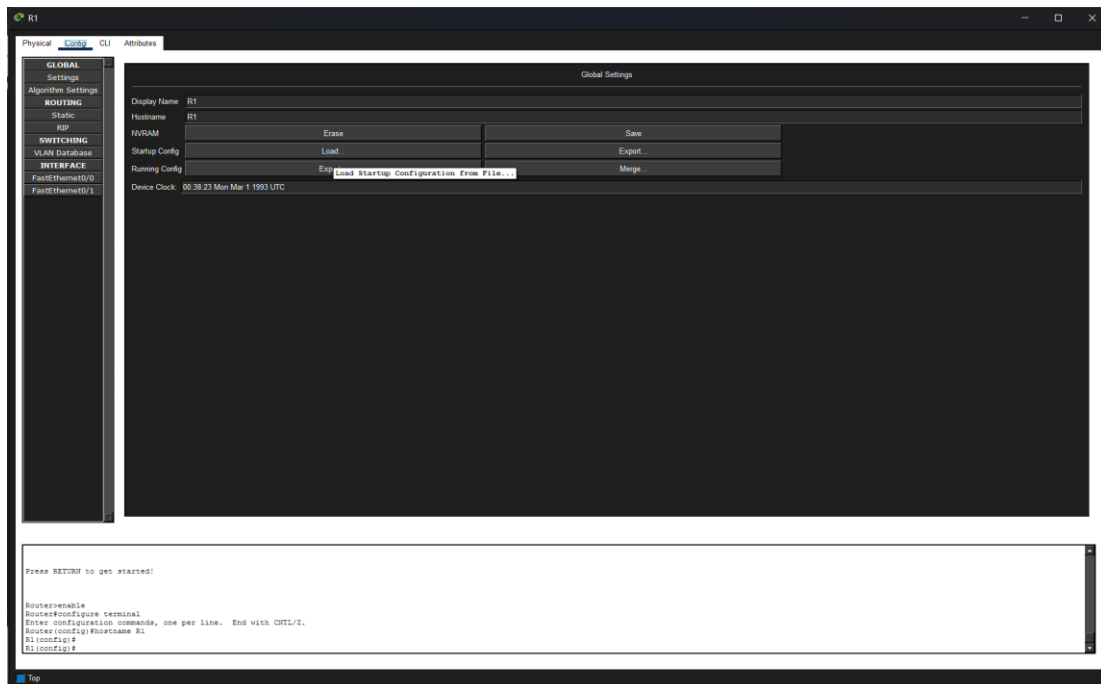


Darium Pitchford Week 7



Task 52 Hostnames

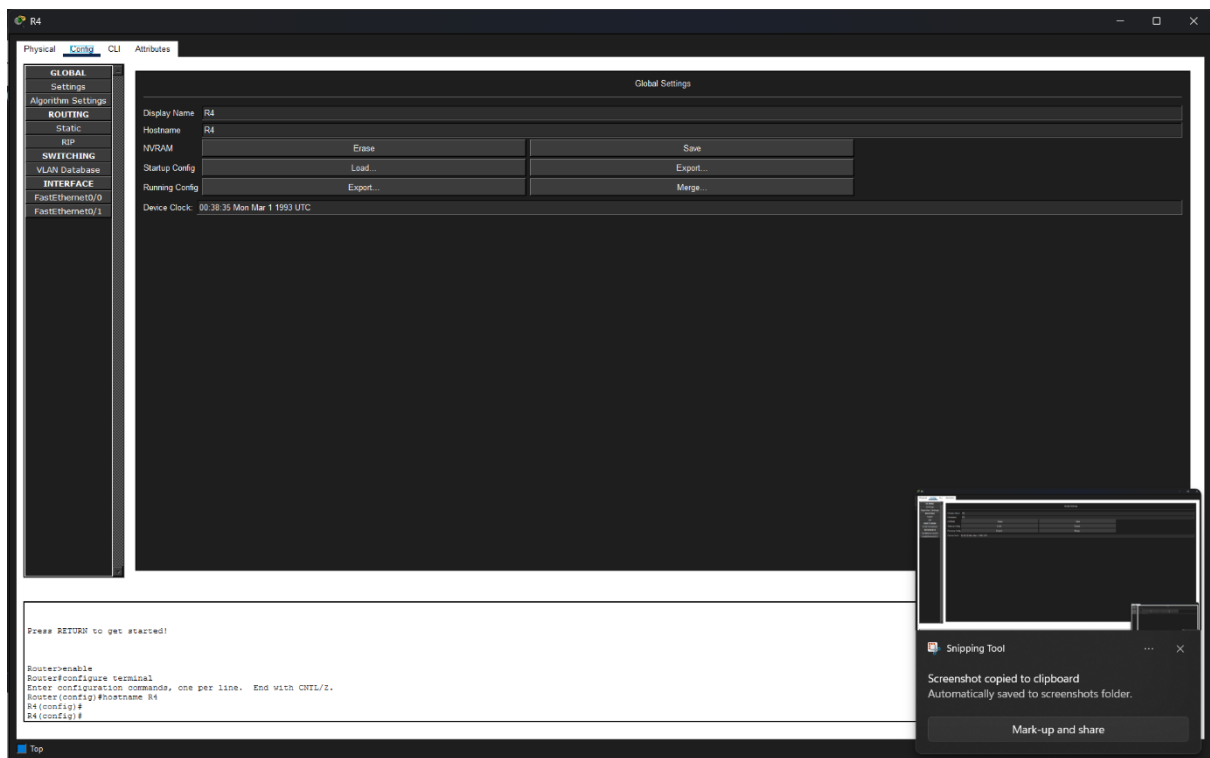

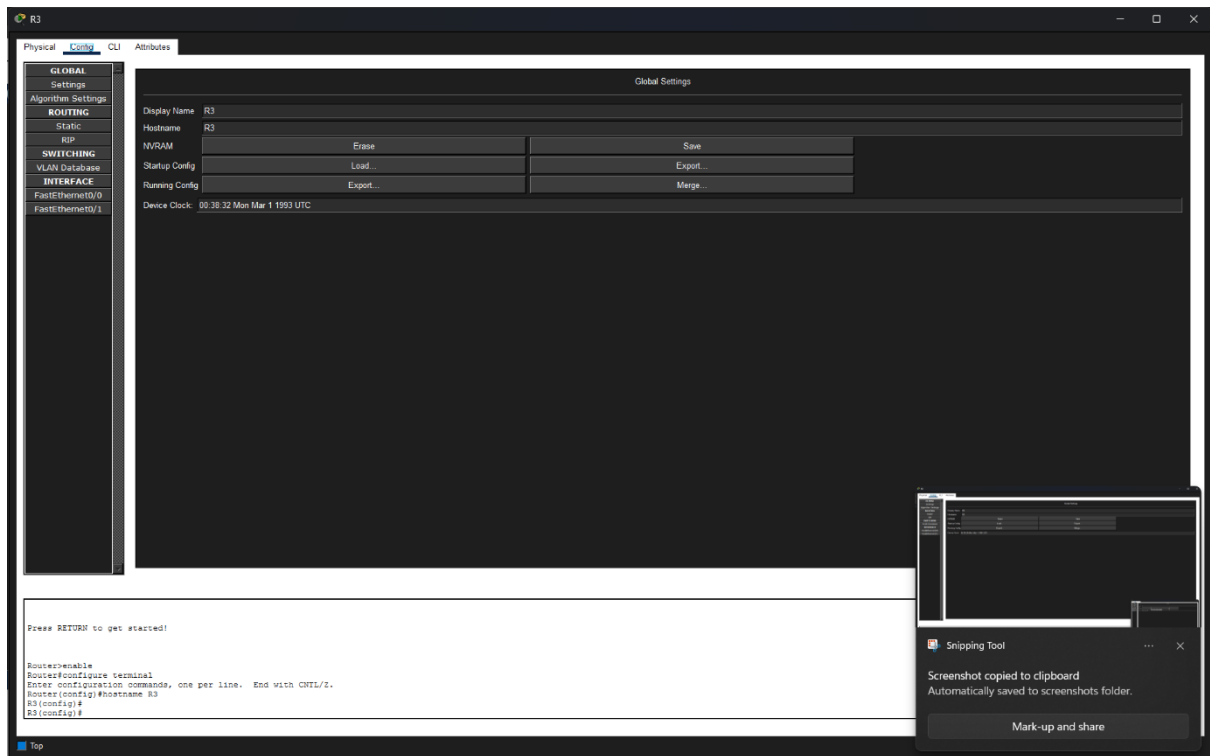

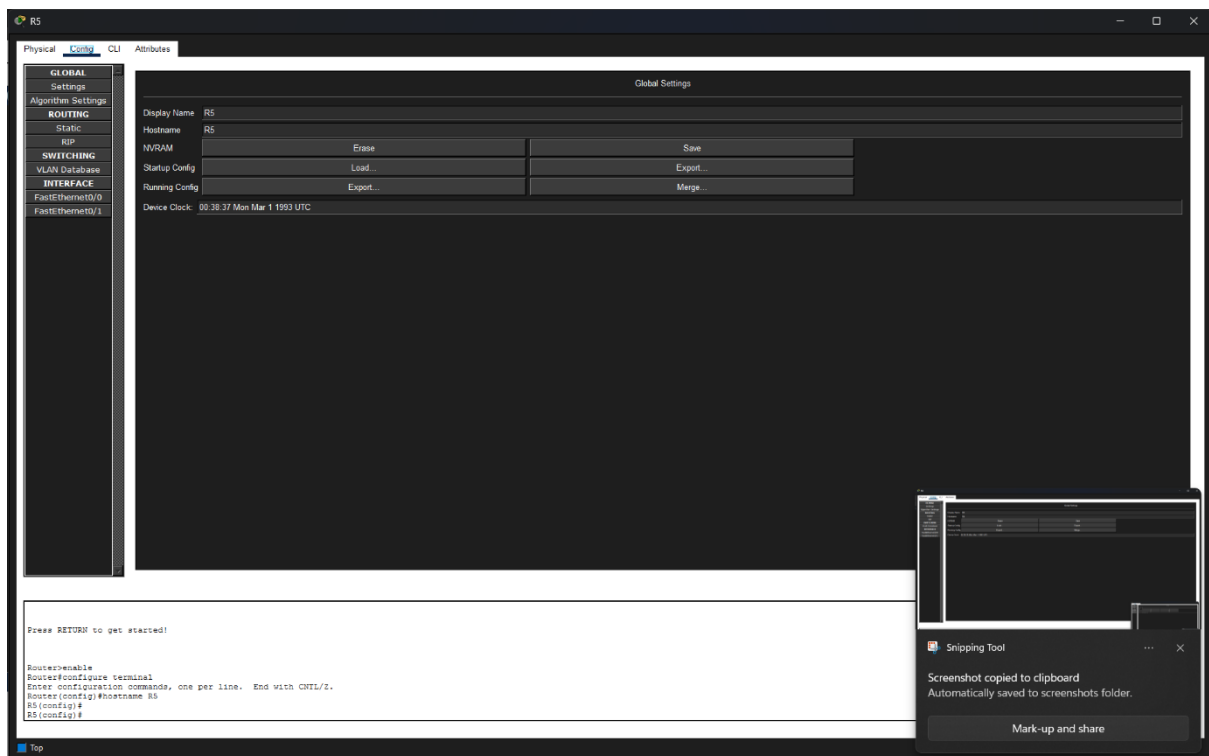


Task 53 Ip routes

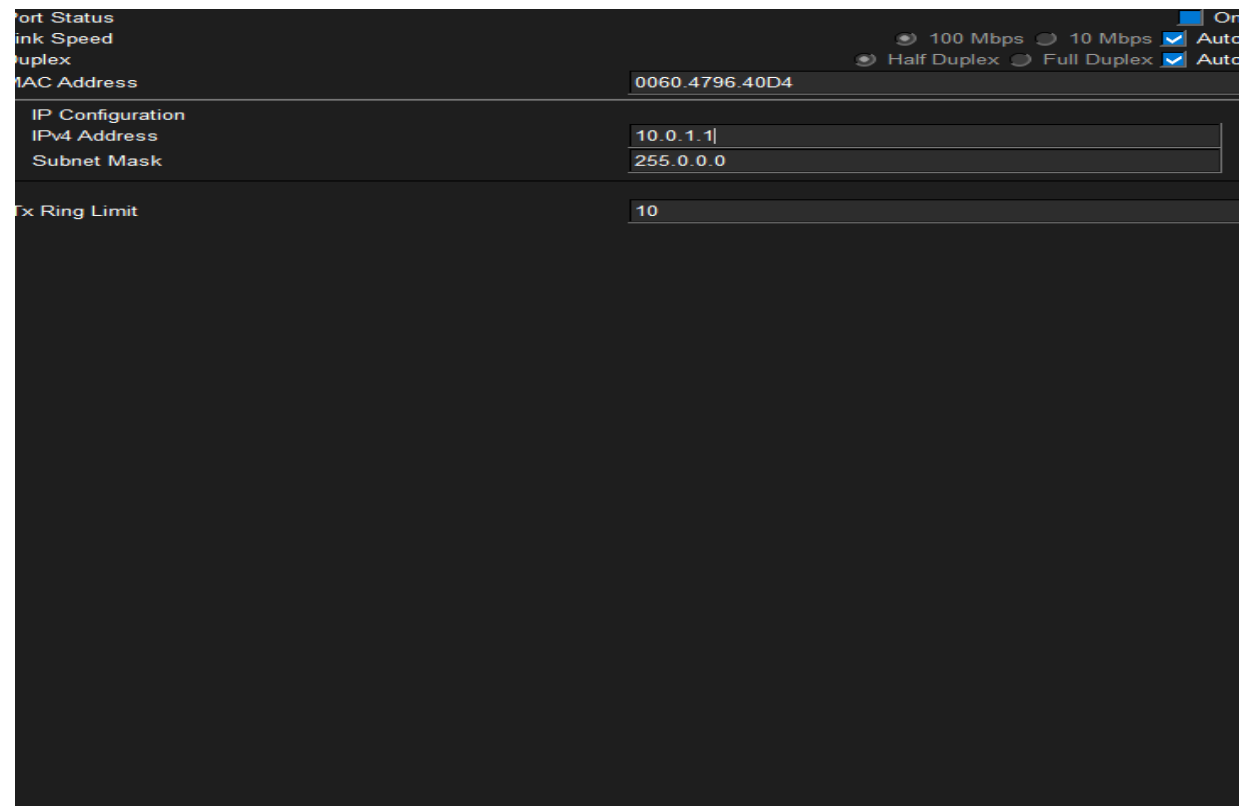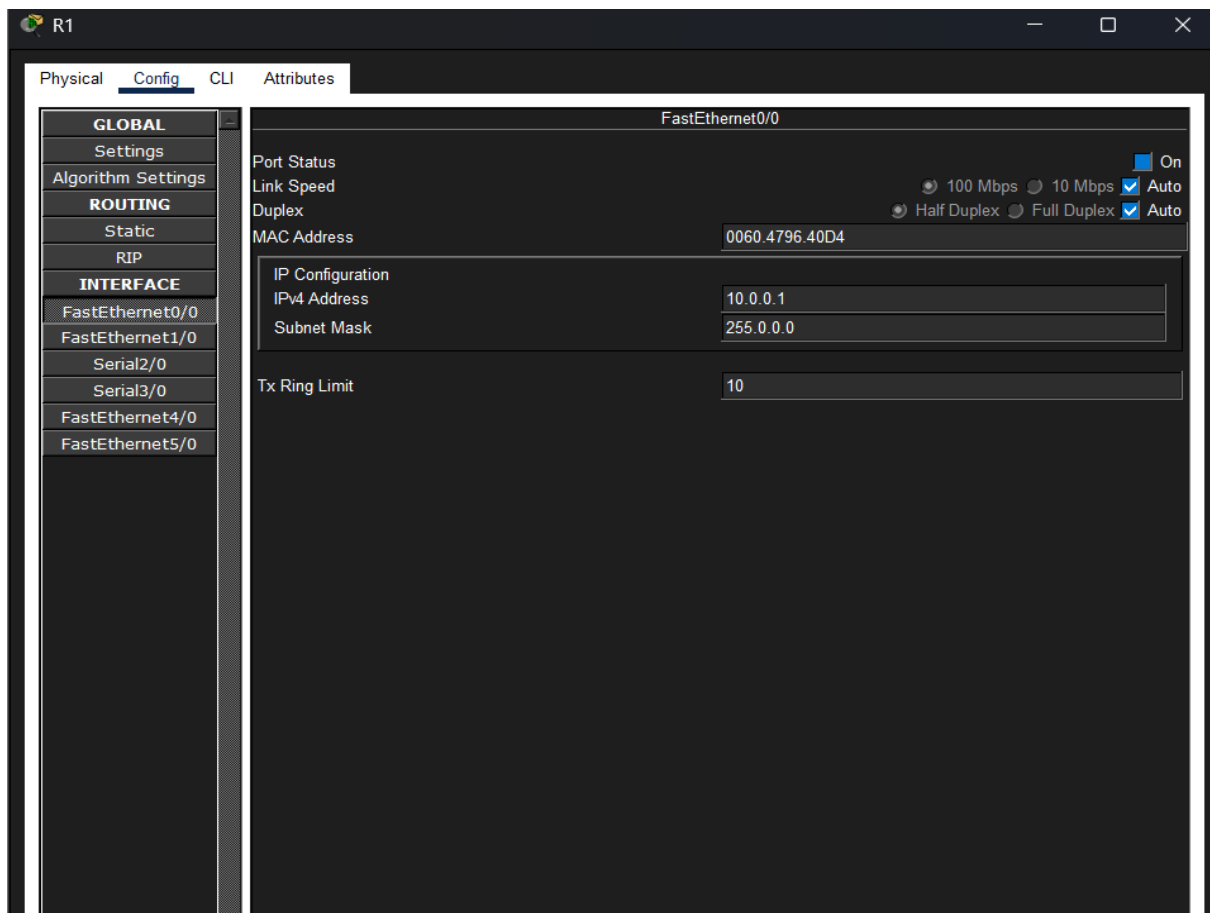

Port Status	☒ On
Link Speed	☒ 100 Mbps ☐ 10 Mbps ☒ Auto
Duplex	☒ Half Duplex ☐ Full Duplex ☒ Auto
MAC Address	0060.4796.40D4
IP Configuration	
IPv4 Address	10.0.2.1
Subnet Mask	255.0.0.0
Tx Ring Limit	10

Port Status	☒ On
Link Speed	☒ 100 Mbps ☐ 10 Mbps ☒ Auto
Duplex	☒ Half Duplex ☐ Full Duplex ☒ Auto
MAC Address	0060.4796.40D4
IP Configuration	
IPv4 Address	10.0.3.1
Subnet Mask	255.0.0.0
Tx Ring Limit	10

Task 55 tracert Ping pc1 to pc 2

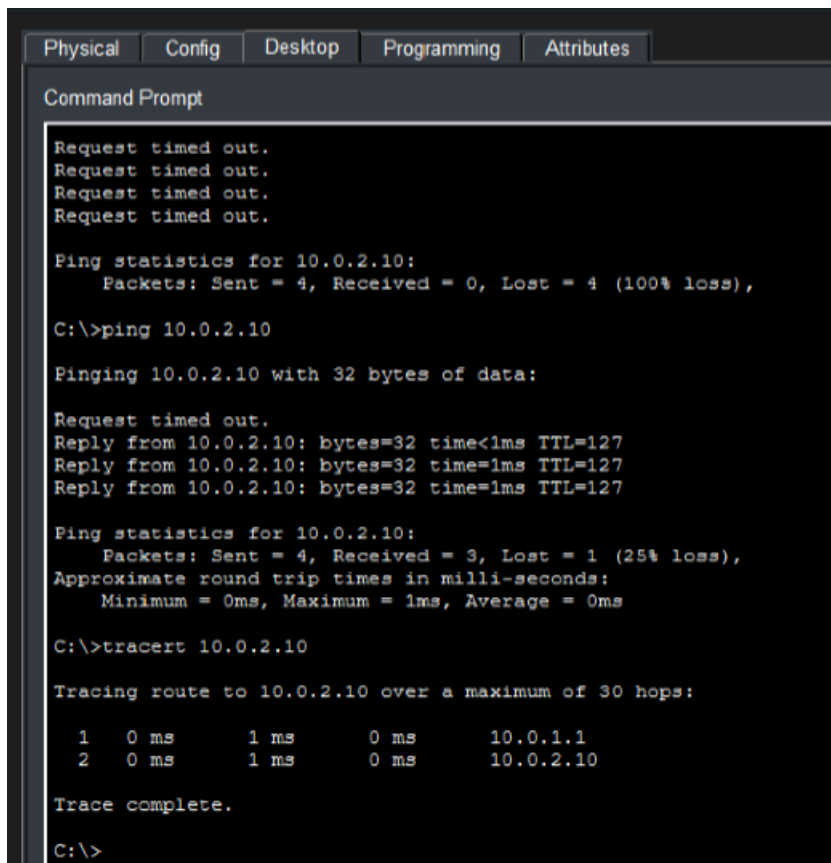

The screenshot shows a Packet Tracer Command Prompt window with tabs for Physical, Config, Desktop, Programming, and Attributes. The 'Desktop' tab is active, displaying a Command Prompt window. The output shows a failed ping to 10.0.2.10 (100% loss) followed by a successful ping (25% loss). The tracert command shows a two-hop path from 10.0.1.1 to 10.0.2.10.

```
Physical Config Desktop Programming Attributes
Command Prompt

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.0.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.0.2.10

Pinging 10.0.2.10 with 32 bytes of data:

Request timed out.
Reply from 10.0.2.10: bytes=32 time<1ms TTL=127
Reply from 10.0.2.10: bytes=32 time=1ms TTL=127
Reply from 10.0.2.10: bytes=32 time=1ms TTL=127

Ping statistics for 10.0.2.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>tracert 10.0.2.10

Tracing route to 10.0.2.10 over a maximum of 30 hops:

  1  0 ms      1 ms       0 ms      10.0.1.1
  2  0 ms      1 ms       0 ms      10.0.2.10

Trace complete.

C:\>
```

Task 56



The screenshot shows a Packet Tracer Command Prompt window displaying a failed ping to 10.1.2.10 (100% loss). The output shows four 'Destination host unreachable' replies and a summary of 4 packets sent, 0 received, and 4 lost.

```
Pinging 10.1.2.10 with 32 bytes of data:

Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.

Ping statistics for 10.1.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Task 57 Configure Ip on routers

```
ip address 10.0.0.2 255.0.0.0
R2(config-if)#ip address 10.0.0.2 255.255.255.0
R2(config-if)#
R2(config-if)#exit
R2(config)#interface FastEthernet0/1
R2(config-if)#no shutdown
R2(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
ip address 10.1.0.2 255.255.255.0
R2(config-if)#ip address 10.1.0.2 255.255.255.0
R2(config-if)#
R2(config-if)#
R2(config-if)#exit
R2(config)#interface FastEthernet0/0
R2(config-if)#
```

Task 58 Pc 3 Ping

```
Pinging 10.1.2.1 with 32 bytes of data:
Reply from 10.1.2.1: bytes=32 time<1ms TTL=255
Reply from 10.1.2.1: bytes=32 time<1ms TTL=255
Reply from 10.1.2.1: bytes=32 time=1ms TTL=255
Reply from 10.1.2.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.1.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

Task 59 Static Routes

R1- 10.1.0.0 255.255.255.0 10.0.0.2

R2- 10.0.1.0 255.255.255.0 10.0.0.1

R3- 10.0.0.0 255.255.255.0 10.1.0.2

R4- 10.1.0.0 255.255.255.0 10.1.1.2

Task 60

```
C:\>tracert 10.1.2.10

Tracing route to 10.1.2.10 over a maximum of 30 hops:

  0  0 ms    0 ms    0 ms    10.0.1.1
  1  0 ms    0 ms    0 ms    10.0.0.2
  2  0 ms    0 ms    0 ms    10.1.0.1
  3  0 ms    0 ms    0 ms    10.1.1.1
  4  10 ms   0 ms    0 ms    10.1.2.10

Trace complete.

C:\>tracert 10.0.2.10

Tracing route to 10.0.2.10 over a maximum of 30 hops:

  0  0 ms    0 ms    0 ms    10.0.1.1
  1  0 ms    0 ms    0 ms    10.0.2.10

Trace complete.

C:\>
```

Task 61 Remove static Routes

```
C:\>ping 10.1.2.10

Pinging 10.1.2.10 with 32 bytes of data:

Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.
Reply from 10.0.1.1: Destination host unreachable.

Ping statistics for 10.1.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
```

Task 62

```
R1(config)#ip route 10.1.0.0 255.255.252.0 10.0.0.2
```

Task 63 Pc 1 Pings PC 3 again

```
C:\>ping 10.1.2.10

Pinging 10.1.2.10 with 32 bytes of data:

Reply from 10.1.2.10: bytes=32 time<1ms TTL=124
Reply from 10.1.2.10: bytes=32 time<1ms TTL=124
Reply from 10.1.2.10: bytes=32 time<1ms TTL=124
Reply from 10.1.2.10: bytes=32 time<1ms TTL=124

Ping statistics for 10.1.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Task 64

```
Device Name: R5
Custom Device Model: 2811 IOS15
Hostname: R5
```

Port	Link	VLAN	IP Address
FastEthernet0/0	Up	--	10.1.3.2/24
FastEthernet0/1	Up	--	10.0.3.2/24

Task 65

```
C:\>tracert 10.1.3.2

Tracing route to 10.1.3.2 over a maximum of 30 hops:

  1  0 ms    0 ms    0 ms    10.0.1.1
  2  0 ms    0 ms    4 ms    10.0.0.2
  3  0 ms    *        1 ms    10.0.0.2
  4  *        0 ms    *        Request timed out.
  5  0 ms    *        0 ms    10.0.0.2
  6  *        0 ms    *        Request timed out.
  7  1 ms    *        0 ms    10.0.0.2
  8  *        1 ms    *        Request timed out.
  9  0 ms    *        0 ms    10.0.0.2
 10  *        0 ms    *        Request timed out.
 11  1 ms    *        1 ms    10.0.0.2
 12  *        0 ms    *        Request timed out.
 13  0 ms    *        1 ms    10.0.0.2
 14  *        0 ms    *        Request timed out.
 15  0 ms    *        0 ms    10.0.0.2
 16  *        0 ms    *        Request timed out.
```

Task 67

```

C:\>ping 10.1.3.2

Pinging 10.1.3.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.1.3.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

```

Task 68

Port Status	☒ On
Link Speed	☒ 100 Mbps ☐ 10 Mbps ☒ Auto
Duplex	☒ Half Duplex ☐ Full Duplex ☒ Auto
MAC Address	0060.47A8.41E5
IP Configuration	
IPv4 Address	203.0.113.1
Subnet Mask	255.255.255.0
Tx Ring Limit	10

Task 69

R1- 0.0.0.0 0.0.0.0 10.1.1.1

R2- 0.0.0.0 0.0.0.0 10.1.0.1

R3- 0.0.0.0 0.0.0.0 10.1.1.1

R5- 0.0.0.0 0.0.0.0 10.1.3.1

Task 70

```
R1(config)#ip route 0.0.0.0 0.0.0.0 10.0.3.2
```

Task 71

Yes, R1 automatically has routes for all networks that are directly connected to its interfaces, and these routes are added automatically when the interfaces are configured with IP addresses and are up. R1 does not need routes for networks that are directly connected to it.

Task 72

PC1 loses connectivity to PC3 because R1 no longer has a route to the network where PC3 is located, PC1 and PC3 have not changed all.

Task 73

A summary route combines multiple smaller 24 networks into one larger network range and this allows R1 to use one route instead of several individual routes reducing the size of the routing table while still providing a path to all the included networks.