
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

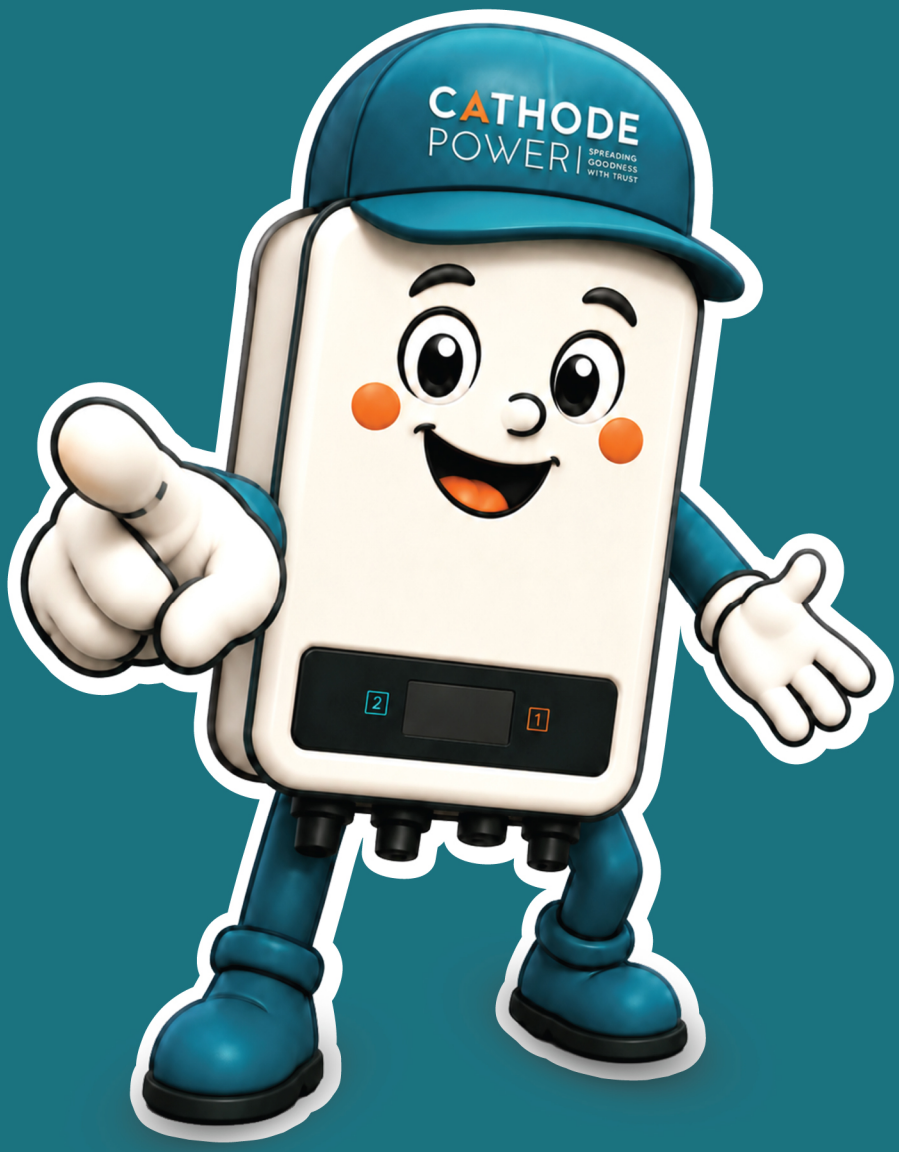


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

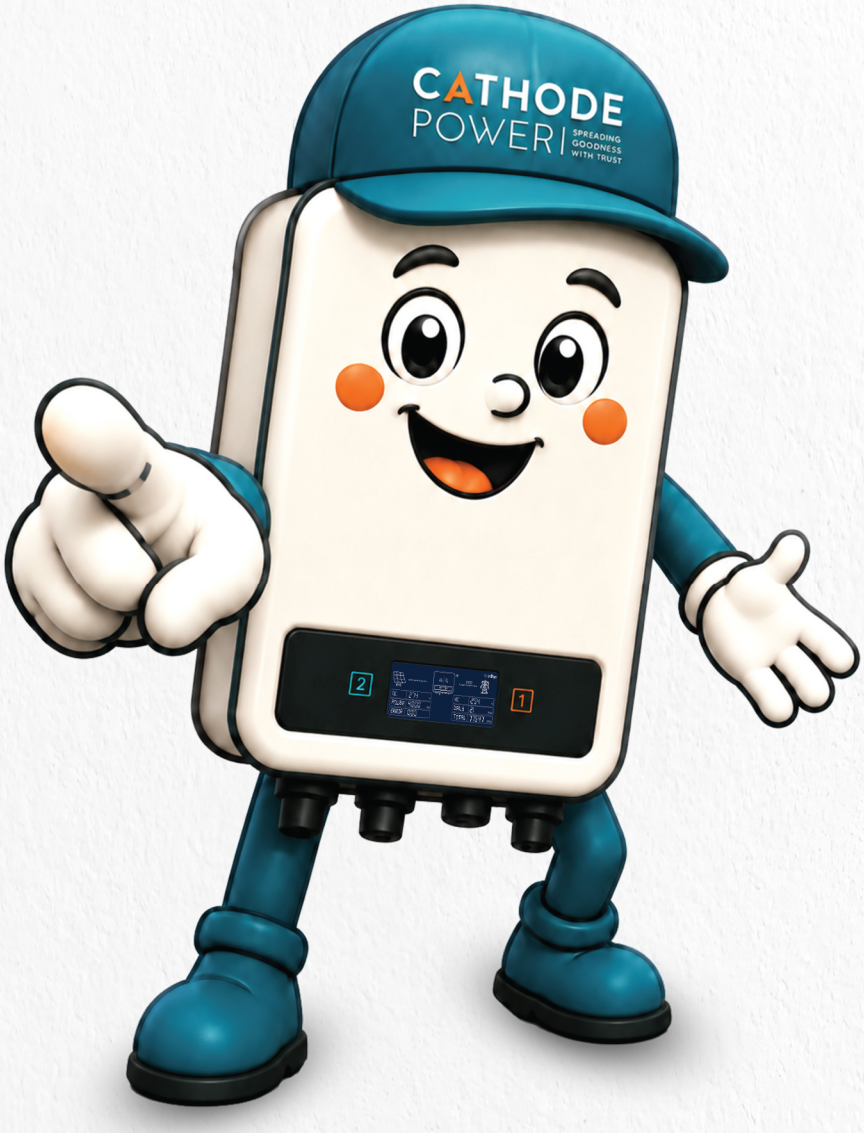

MICRO INVERTERS

0.6kW | 0.8kW | 1.0kW | 1.2kW

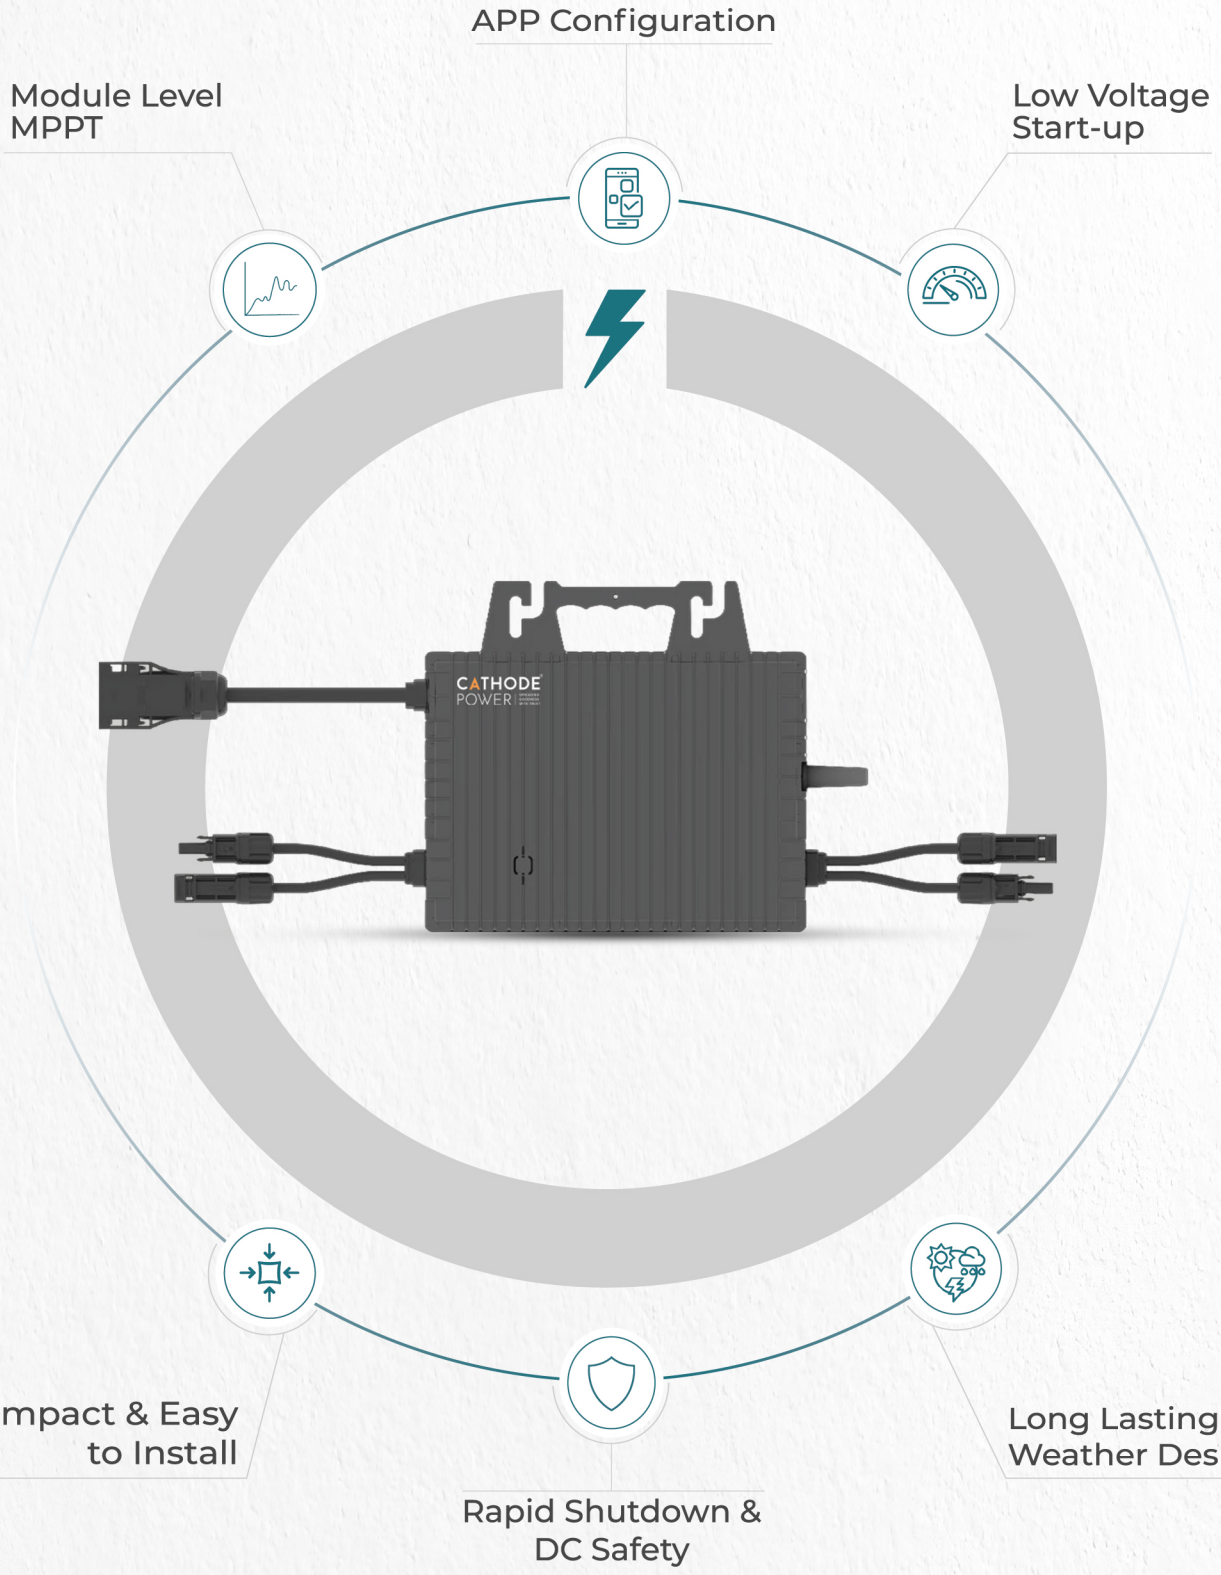


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-0.6-MIC TO CP-1.2-MIC)

MODEL NO.	CP-0.6-MIC	CP-0.8-MIC	CP-1.0-MIC	CP-1.2-MIC
Input (DC)				
Max. DC Input Power	660kWp	880kWp	1100kWp	1320kWp
Max. DC Input Voltage (Per MPPT)	60V			
MPPT Voltage Range	16V - 60V			
Max. MPPT Current	20A			
Max. Short-Circuit Current	25A			
Quantity of MPPT	2			
Output (AC)				
Rated Voltage	230V			
Max. Current	2.61A	3.48A	4.35A	5.22A
Rated Frequency	50Hz			
Rated Power	600W	800W	1000W	1200W
Max. Apparent Power	600VA	800VA	1000VA	1200VA
Power Factor Range	0.8 Leading To 0.8 Lagging			
Efficiency				
Peak Inverter Efficiency	97.6%			
Nominal MPPT Efficiency	99.9%			
EU Efficiency	96.3%			
Night Time Power Consumption	<50			
General Data				
Dimensions (L/W/H) (mm)	331/218/40mm			
Weight	5.5kg			
Operating Temperature Range	-40°C - 60°C			
Protection Rating	IP67			
Cooling	Natural Convection			
Relative Humidity	0-100%			
Monitoring	WIFI			
Communication	RS485			
Type Of Isolation	Isolated HF Transformer			
Max. Operating Altitude Without Derating	2000m			
Overvoltage Category	DC II : AC III			
Warranty	10 Years			

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

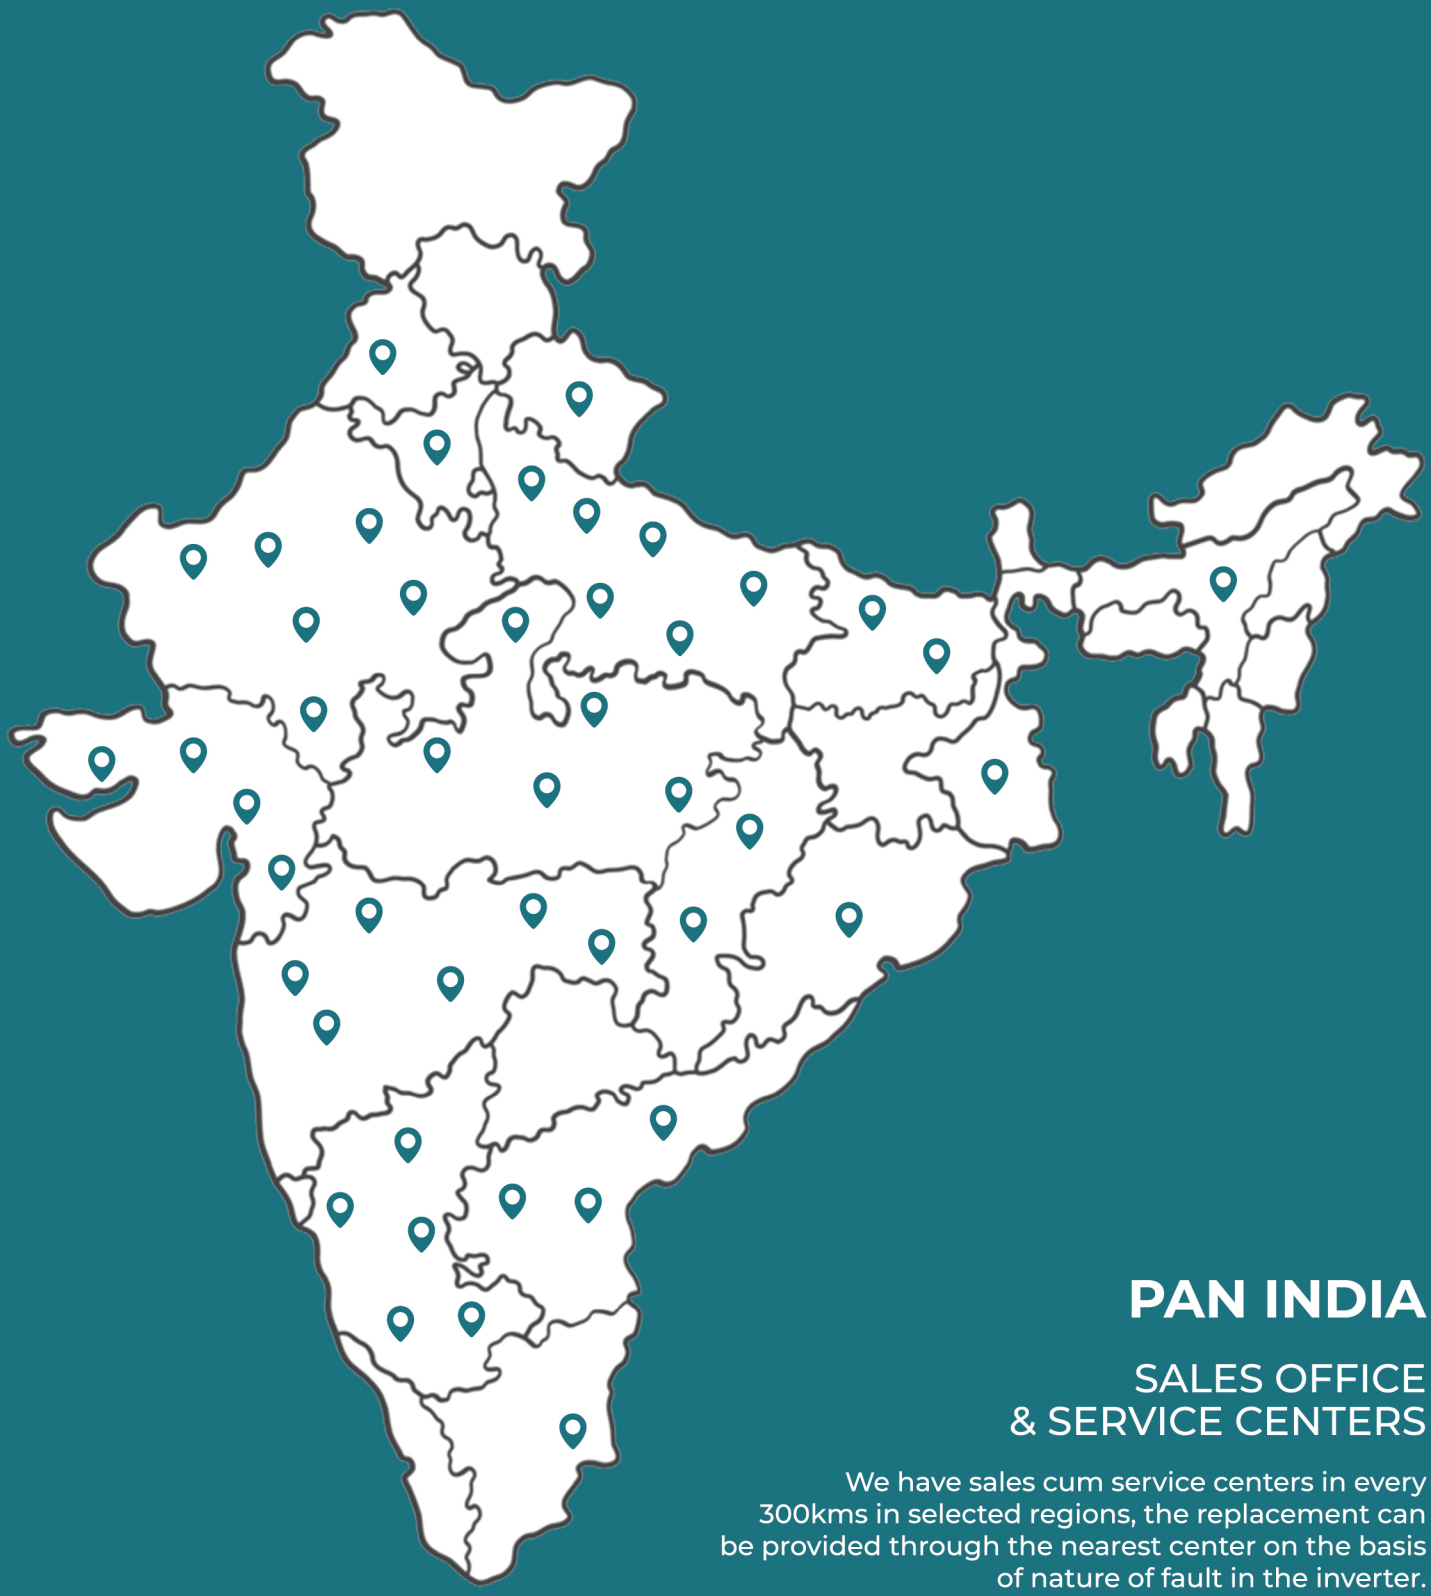

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com