
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

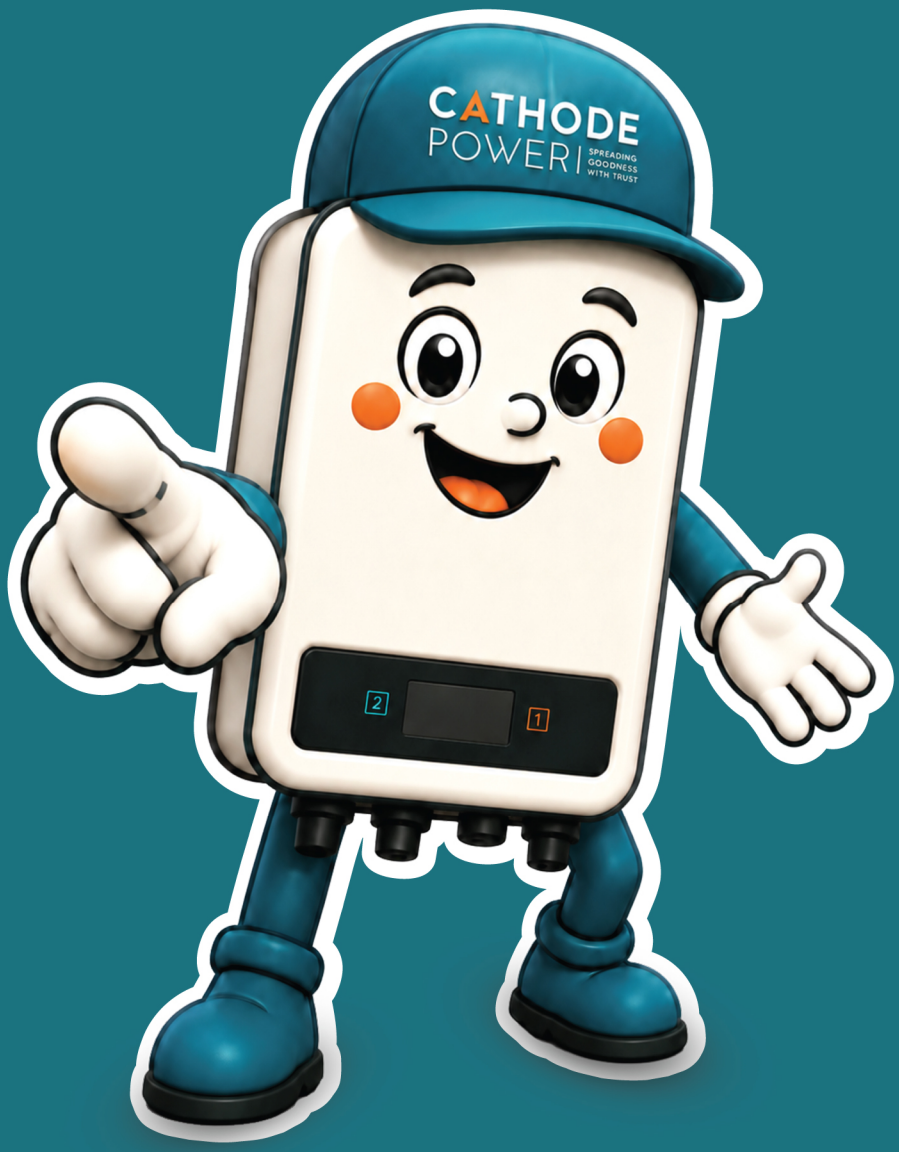


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

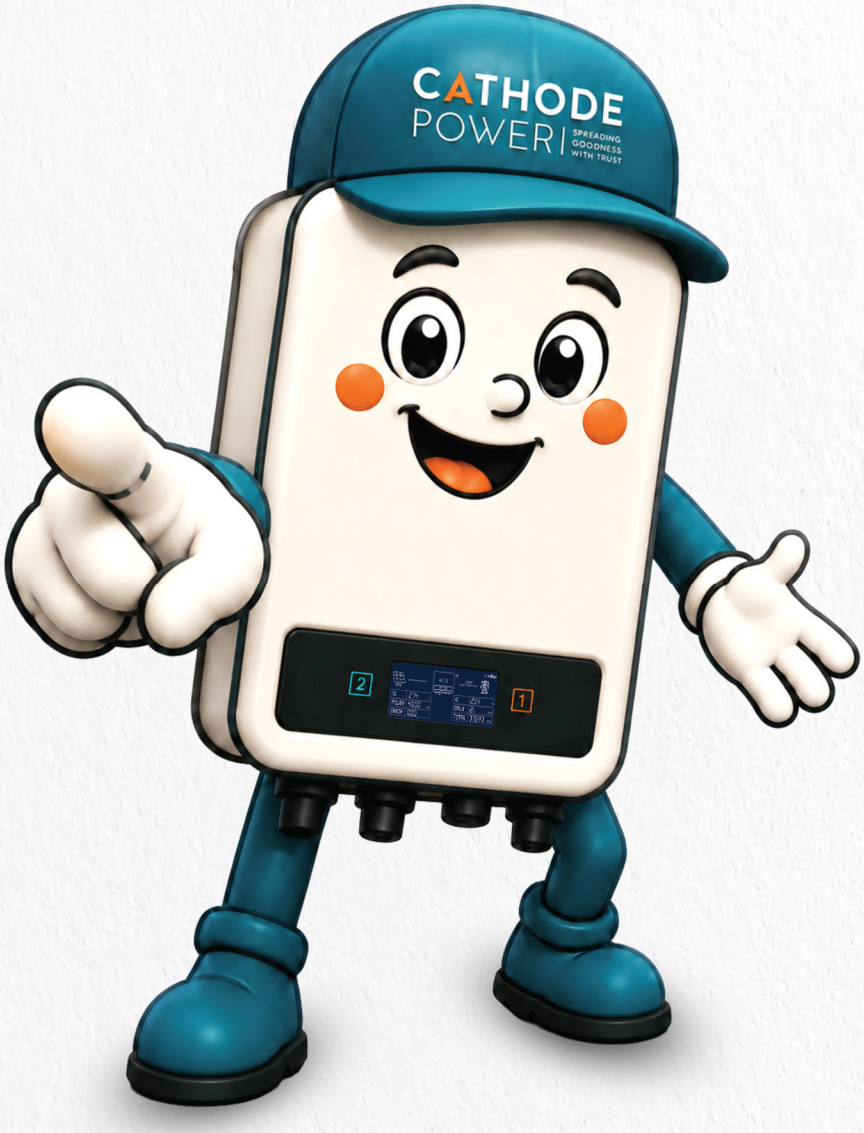

LITHIUM BATTERIES (RACK MOUNTED)

51.2V100Ah | 51.2V200Ah

Wide Operating Temp.

$LiFePO_4$ Technology

Multi Communication



Long Battery Back-up

Smart BMS

Long Cycle Life


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-51.2V100Ah & CP-51.2V200Ah)

PARAMETER	CP-51.2V100Ah	CP-51.2V200Ah
Nominal Voltage	51.2V	
Nominal Capacity	100Ah	200Ah
Nominal Energy	5.12kWh	10.24kWh
Cell Type	LiFePO4	
Combination Mode	16S1P	16S2P
BMS Configuration	16S100A	16S200A
Operating Voltage Range	41.6V-57.6V	
Standard Charge Current	20A 0.2C	40A 0.2C
Maximum Continue Charge Current	50A 0.5C	100A 0.5C
Standard Discharge Current	50A 0.5C	100A 0.5C
Maximum Continue Discharge Current	100A 1C	200A 1C
Cut-off Charge Voltage	41.6V	
Cut-off Discharge Voltage	57.6V	
Weight	43Kg	85Kg
Dimension (L/W/H) (mm)	442x485x178mm	635x442x267mm
Power Cable Outlet Mode	Front	
Cycle Life	≥3000/6000 Cycle, 80% DOD, 25°C	
Case Material	Metal	
Cooling Type	Natural Cooling	
Operating Temperature	Charging: 0°C ~ 50°C	/ Discharge: -20°C ~ 60°C
Relative Humidity	10% - 95% RH	
Storage Temperature	< 3 Month - 10°C ~ 25°C	
Instalation Mode	Rack Mounting	
Remote Mode	Bluetooth	
Communication Mode	CAN, RS485, RS232	

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

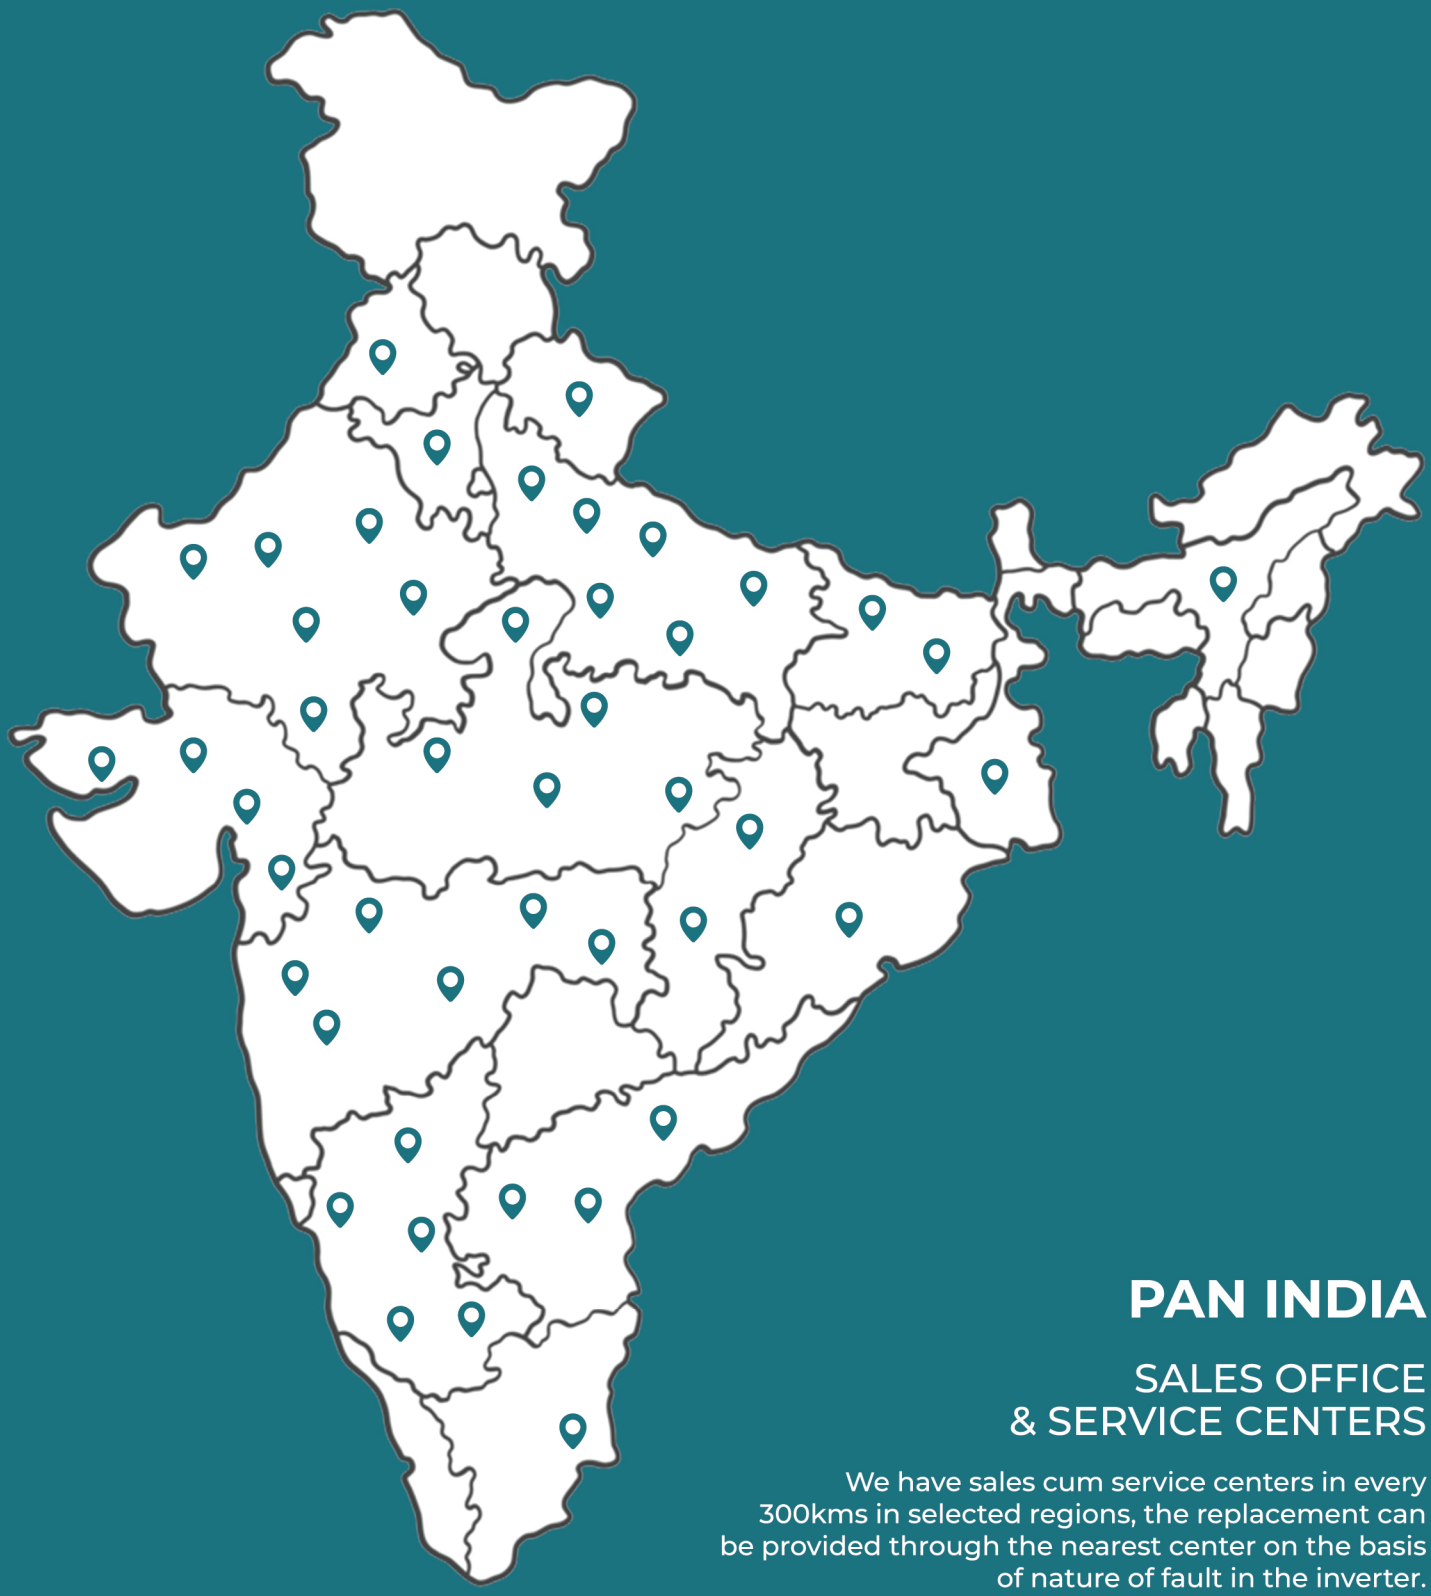

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com