

SZ8001-V-R3

EBARA MIX FLOW VOLUTE PUMP

MODEL SZ



APPLICATION

- 1. Irrigation.
- 2. Industrial Use.
- 3. Drainage.
- 4. Shrimp Ponds.
- 5. Flooding.

FEATURES

1. Highly efficient and economical.

Extremely high efficiency rate of 80%. Small drive motor required significantly reduces operating cost.

2. Trouble Free Operation.

Semi-open impeller guarantees clog free operation.

3. Large Capacity.

Changes in water lever will have little effect on pump capacity. In fact, the higher the water volume, the less horsepower expended.

Perfect for irrigation.

4. Simple Disassembly and Assembly.

Impeller can be easily inspected without removing driver.

Simple to disassemble and assemble.


• GENERAL SPECIFICATION

Туре	Horizontal Shaft Mixed Flow Volute Pump			
Impeller	Mixed Flow Open Type			
Rotation	Counter Clock Wise When Viewed From End Shaft Coupling			
Bearing Type	Sealed Ball Bearing: 200-250 SZ Ball Bearing Oil Bath Type: 300-500 SZ			
Flange	JIS 10 kg/cm ²			
Nozzle Position :	Standard 200 - 250 (Side Suction - Top Discharge) Standard 300 500 (Side Suction - Side Discharge) Optional 300 - 350 (Side Suction - Top Discharge)			
Liquid	River Water, Fresh Water			
Temperature Liquid	Below 80 °C			

1

CONTRUCTION BARE SHAFT PUMP

1. Model 200, 250 SZ

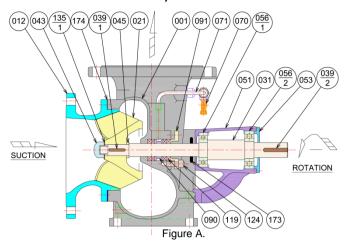

No.	Part Name	Material	Qty/Unit
001	Casing	FC250	1
012	Suction Cover	FC250	1
021	Impeller	FC200	1
031	Shaft	S35C-N	1
039-1	Impeller Key	S45C	1
039-2	Pulley Key	S45C	1
043	Impeller Nut	FC200	1
045	Distance Ring	SS400	1
051	Bearing Housing	FC200	1
053-1	Bearing Cover	FC200	1
053-2	Bearing Cover	FC200	1
056-1	Ball Bearing		1
056-2	Ball Bearing		1
070	Air Vent		1 Set
071	Flushing Pipe		1 Set

2. Model 300, 350, 400, 500 SZ


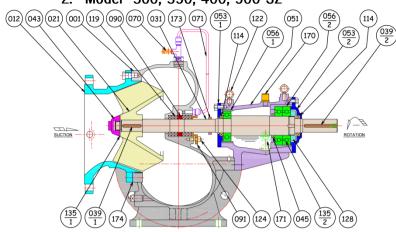


Figure B.


No.	Part Name	Material	Qty/Unit
090	Lantern Ring	BC6	1
091	Gland	BC6	1
114	Oil Seal		2
119	Gland Packing	#6501L	1 Set
122	Eye Bolt	S20C	2
124	Gland Bolt	BS BMD2	2
128	Bearing Nut	SS400	1
135-1	Impeller Washer	Brass	1
135-2	Bearing Washer	SS400	1
170	Air Breather		1
171	Oil Level Gauge		1
173	Deflector	SS400/NR	1
174	Sheet Gasket	Valqua	1

DIMENSIONS

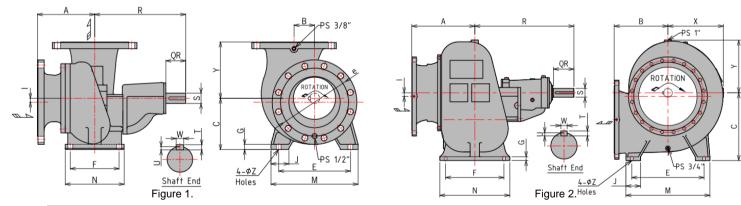


MODEL	FIG.		PUMP DIMENSIONS							SHAFT DIMENSIONS			PUMP WEIGHT								
		Α	R	В	С		E	F	G	J	M	N	Χ	Υ	Z	S	QR	T	U	W	Kg
200SZ	1	224	355	80	200	15	280	190	20	70	340	230	-	220	19	40	77	8	4.5	10	136
250SZ	1	289	380	100	240	15	330	235	22	80	400	280	-	260	19	40	78	8	4.5	10	145
300SZ	1	341	590	135	360	25	330	290	24	75	400	350	-	280	24	48	124	8	4.5	12	271
30032	2	341	590	280	360	25	330	290	24	75	400	350	280	257	24	48	124	8	4.5	12	220
350SZ	1	391	680	155	350	20	430	350	26	105	520	420	-	330	24	55	153	8	4.5	12	325
33032	2	391	680	330	420	20	410	350	26	90	490	420	330	307	24	55	153	8	4.5	12	310
400SZ	2	430	770	370	470	25	490	410	28	100	570	480	381	364	26	65	180	10	5	15	497
500SZ	2	540	850	460	580	31	620	500	32	125	720	600	476	451	26	75	180	12	6	18	840

FLANGE DIMENSIONS (JIS 10K)								
Size	D	g	е	n-фd	T	f		
200 (8")	330	265	290	12-φ23	26	2		
250 (10")	400	325	355	12-φ25	30	2		
300 (12")	445	370	400	16-φ25	32	3		
350 (14")	490	415	445	16-φ25	34	3		
400 (16")	560	475	510	16-φ27	36	3		
500 (20")	675	585	620	20-φ27	40	3		



PERFORMANCE CURVE


1. Model 200 SZ

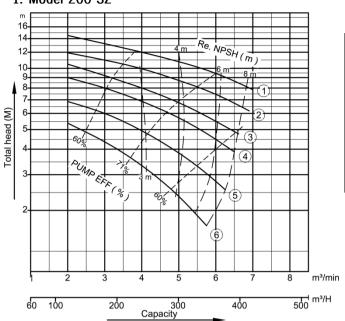

Pump Rotation, and Power Requirement

Tump Notation, and Fower Nequillement						
Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)			
1	1750	15	20			
2	1600	11	15			
3	1500	11	13			
4	1400	7.5	10			
5	1250	5.5	7.5			
6	1100	3.7	5.5			

2. Model 250 SZ

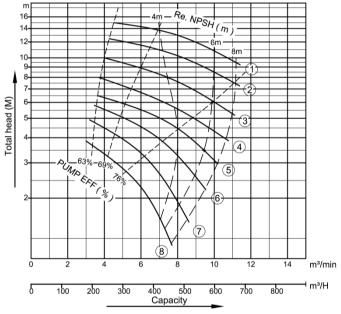


Pump Rotation, and Power Requirement

Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)
1	1450	30	40
2	1320	22	30
3	1180	15	20
4	1060	11	15
5	980	11	13.5
6	900	7.5	10
7	830	5.5	7.5
8	750	3.7	5

Note:

No. 1 Direct Couple with electric motor

3. Model 300 SZ

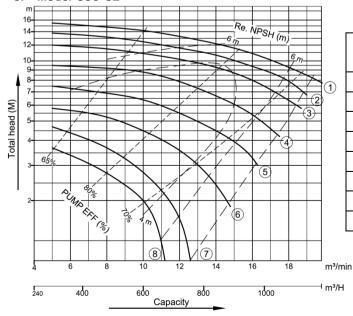


Pump Rotation, and Power Requirement

Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)
1	1240	45	60
2	1170	37	50
3	1100	30	40
4	980	22	30
5	880	15	20
6	780	11	15
7	690	7.5	10
8	620	5.5	7.5

• PERFORMANCE CURVE


4. Model 350 SZ

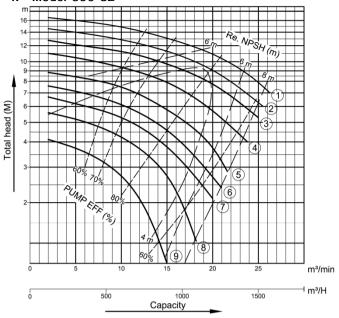

Pump Rotation, and Power Requirement

Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)
1	1070	55	75
2	1010	45	60
3	950	37	50
4	880	30	40
5	795	22	30
6	735	18.5	25
7	700	15	20
8	625	11	15
9	550	7.5	10


5. Model 400 SZ

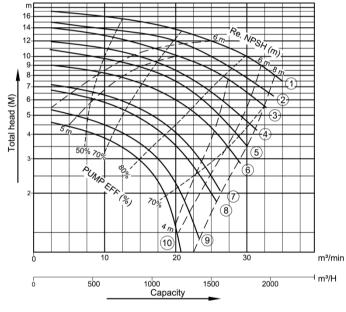

Pump Rotation, and Power Requirement

Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)
1	930	75	100
2	880	60	80
3	825	55	75
4	775	45	60
5	730	37	50
6	685	30	40
7	610	22	30
8	590	18.5	25
9	530	15	20
10	490	11	15

6. Model 500 SZ

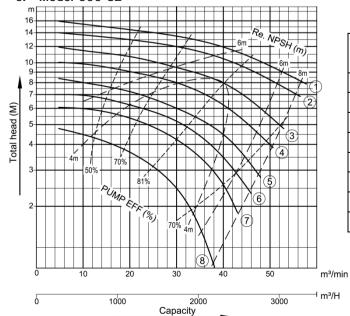

Pump Rotation, and Power Requirement

Curve No	Pump Rotation (Rpm)	Motor Output (kW)	Engine Output (HP)
1	735	110	150
2	705	95	130
3	640	75	100
4	590	55	75
5	535	45	60
6	500	37	45
7	470	30	40
8	420	22	30



EBARA CORPORATION, Japan
Website: www.ebara.co.jp/en
EBARA PUMPS EUROPE S.p.A., Italy
Website: www.ebaraeurope.com
E-mail: marketing@ebaraeurope.com

SUMOTO S.r.l., Italy Website: www.sumoto.com E-mail: info@sumoto.com

EBARA ESPAÑA BOMBAS, S.A., Spain

Website: www.ebara.es E-mail: correo@ebara.es

EBARA INTERNATIONAL CORPORATION, U.S.A.

Website: www.pumpsebara.com E-mail: sales@pumpsebara.com

EBARA IND**Ú**STRIAS MECÂNICAS E COMÉRCIO LTDA., Brazil

Website: www.ebara.com.br E-mail: inteldept@ebara.com.br

EBARA MACHINERY (CHINA) CO., LTD., P.R.China

Website: www.ebara.cn E-mail: emc@ebara.cn

EBARA- DENSAN TAIWAN MANUFACTURING CO., LTD., R.O. China-Taiwan

Website: www.ebara.co.tw E-mail: sales01@ebara.co.tw

EBARA (THAILAND) LIMITED, Thailand

Website: www.ebara.co.th E-mail: info@ebara.co.th

PT. EBARA INDONESIA, Indonesia Website: www.ebaraindonesia.com E-mail: marketing@ebaraindonesia.com

EBARA PUMPS MALAYSIA SDN. BHD., Malaysia

Website: www.ebara.com.my
E-mail: sales@ebara.com.my
EBARA BENGUET, INC., Philippines
Website: www.ebaraphilippines.com
E-mail: pumpsales@ebaraphilippines.com

EBARA ENGINEERING SINGAPORE PTE, LTD., Singapore

Website: www.ebara.com.sg
E-mail: ebaranet@singnet.com.sg

EBARA PUMPS AUSTRALIA PTY. LTD., Australia

Website: www.ebara.com.au E-mail: sales@ebara.com.au

All specification subject to change without prior notice