TStat8


FIRMWARE UPDATE, SINGLE DEVICE · built Nov 12, 2026

FIRMWARE UPDATE, SINGLE DEVICE

Using the Tstat8 as an example

1> Download the latest firmware from temcocontrols.com ,or paste "http://www.temcocontrols.com/ftp/firmware/Tstat8" to your browser .

Select the version that you want to update to download .

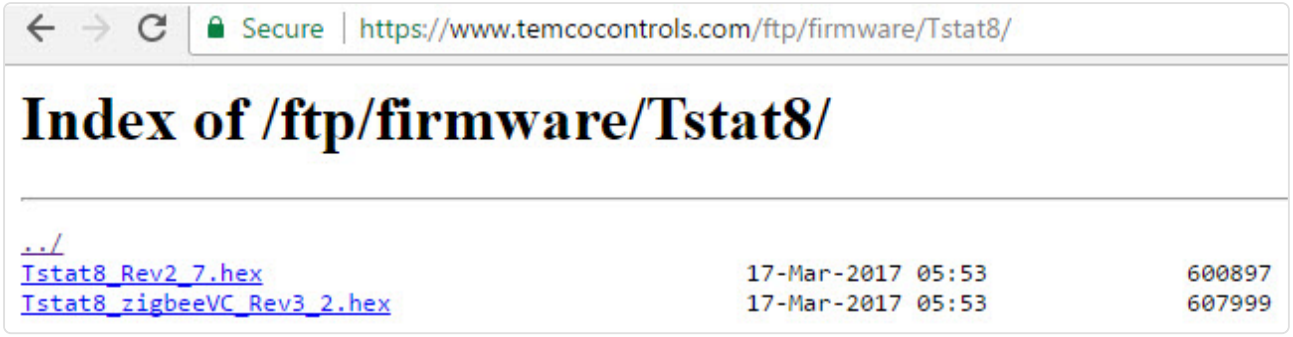


If you get the latest firmware from temco's engineer, don't need the step 1.


2> If your computer didn't install the T3000 ,please download T3000.zip .

If you have installed the T3000,don't need the step2.

3> Click the icon of ISPTool

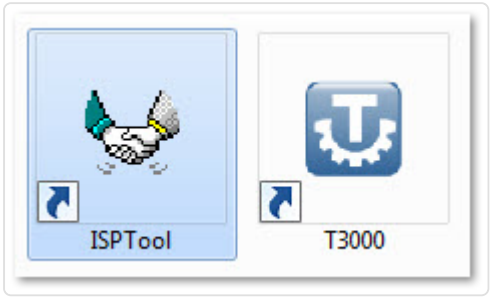

and then show a window.

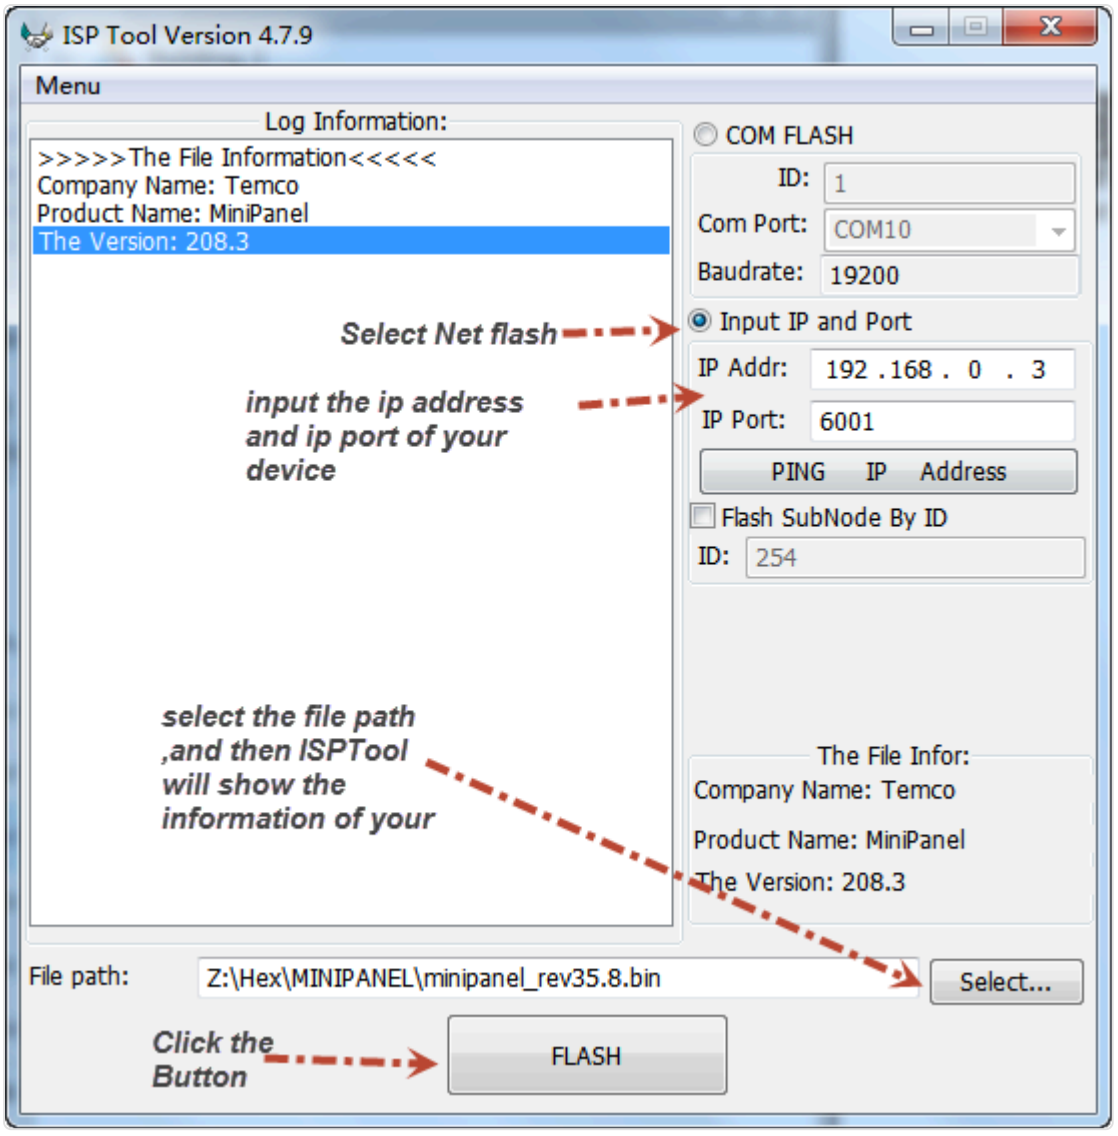

If you want to update other device ,using Com port ,please select "COM FLASH"

And then input the Modbus ID of your device .If you don't know your Modbus ID ,you can try flash the device ,using the 255.

select your Com Port .

and then just click the button of "FLASH"

notes: If you don't know the ip address and ip port of the device, don't care about the two parameters .

ISPTool will show the right message in the blank area ,including the ip and ip port.

The contents of FIRMWARE UPDATE, SINGLE DEVICE