



Firmware Update Guidelines

➤ Software Installation


Install the software "MKSLaserTool_setupV1.x.x.exe", follow the prompts to set the installation directory and install it. After the installation is complete, the software shown on the right will appear on the desktop.

07_FirmwareUpdate > 01_UpdateSoftware > Windows OS




➤ Refresh the firmware


1. Turn on the machine and use the Type-C data cable to connect the computer to the machine.
2. Double-click to open the software "LaserTool", click item 1, as shown below.

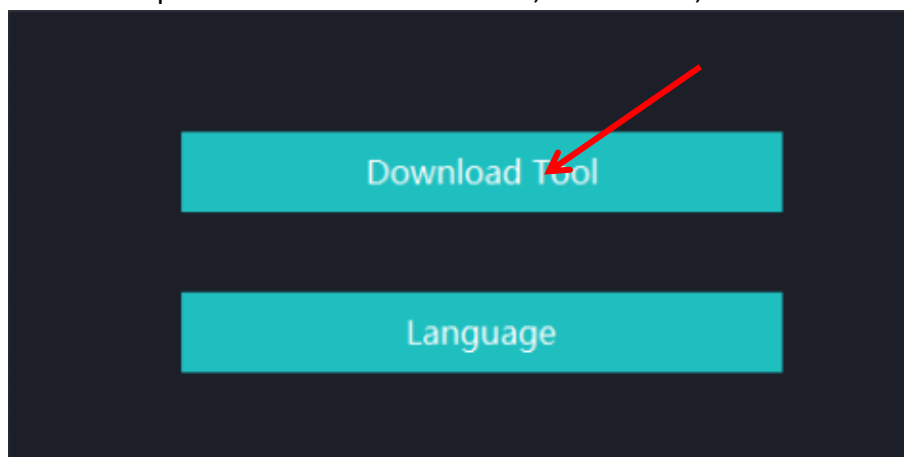


3. As shown by the arrow below, select the firmware to be burned; open the device manager to confirm the port connected to the machine; other parameters can be as shown in the screenshot below.

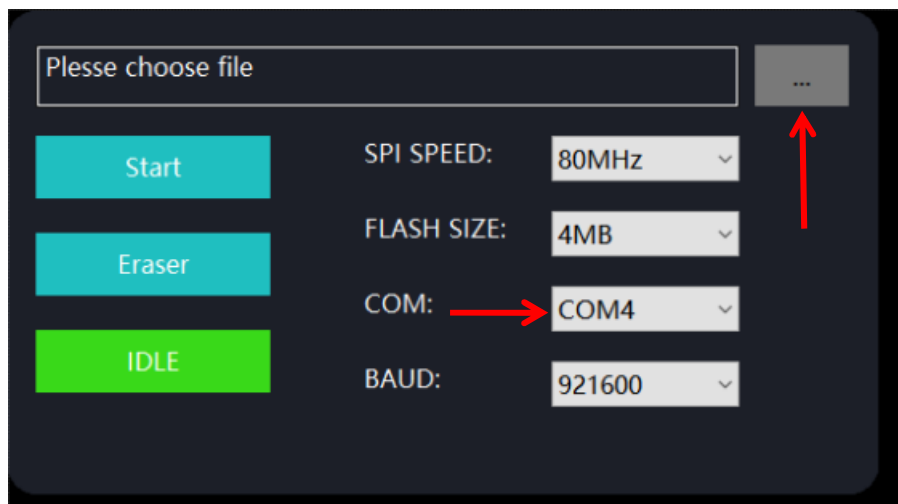

How to find the COM port (ie serial port): Right click my computer -> Left click Manage -> The "Computer Management" dialog box pops up -> Select Device Manager -> Click "Port", find the word USB-SERIAL CH340, the subsequent COM4 is the required COM port, as shown below.

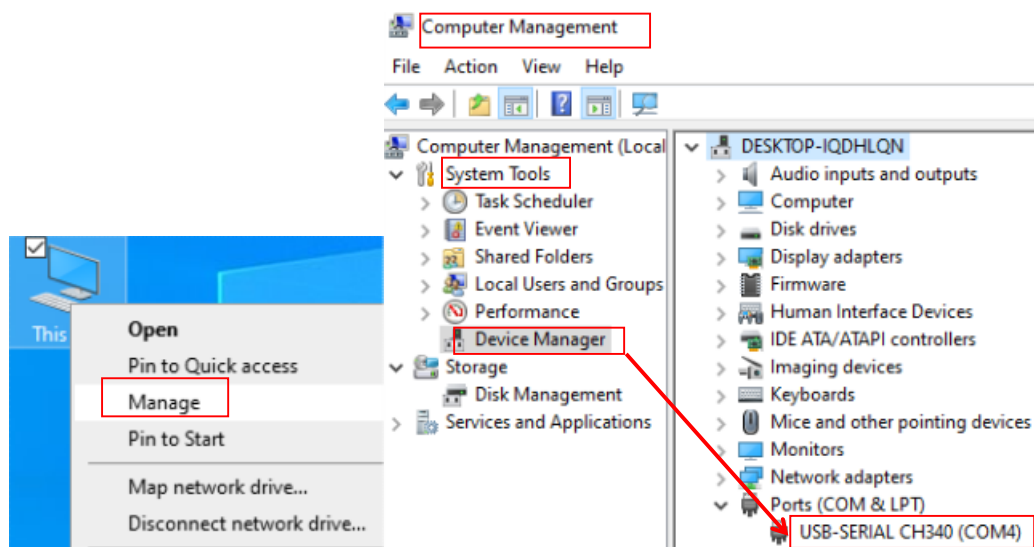

4. After completing the above settings, click "Start" and wait a few minutes for the percentage progress to complete.

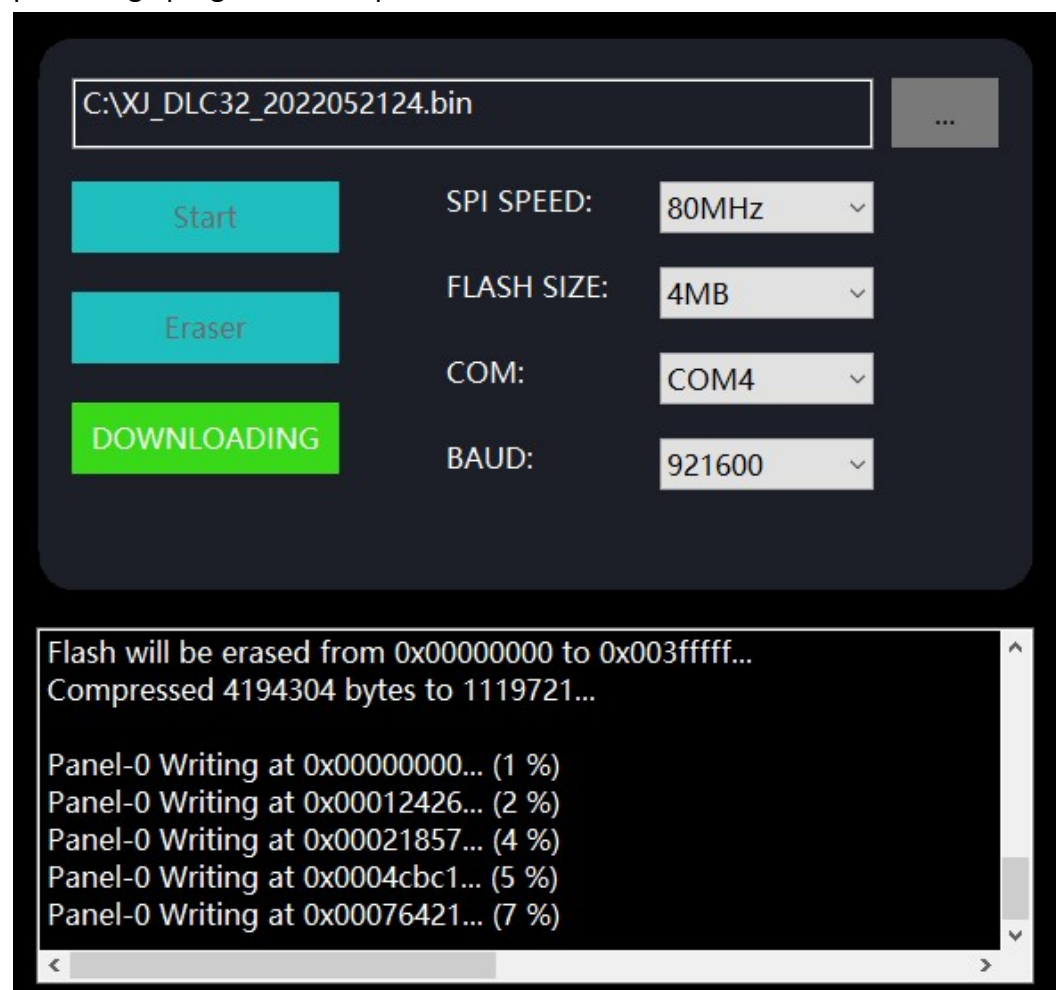

5. When the message shown in the figure below appears, the firmware update is complete, please close the software and restart the machine.

