
| REV | DESCRIPTION OF CHANGE | REV BY | DATE |
|---|---|---|---|
| | | | |

Top view

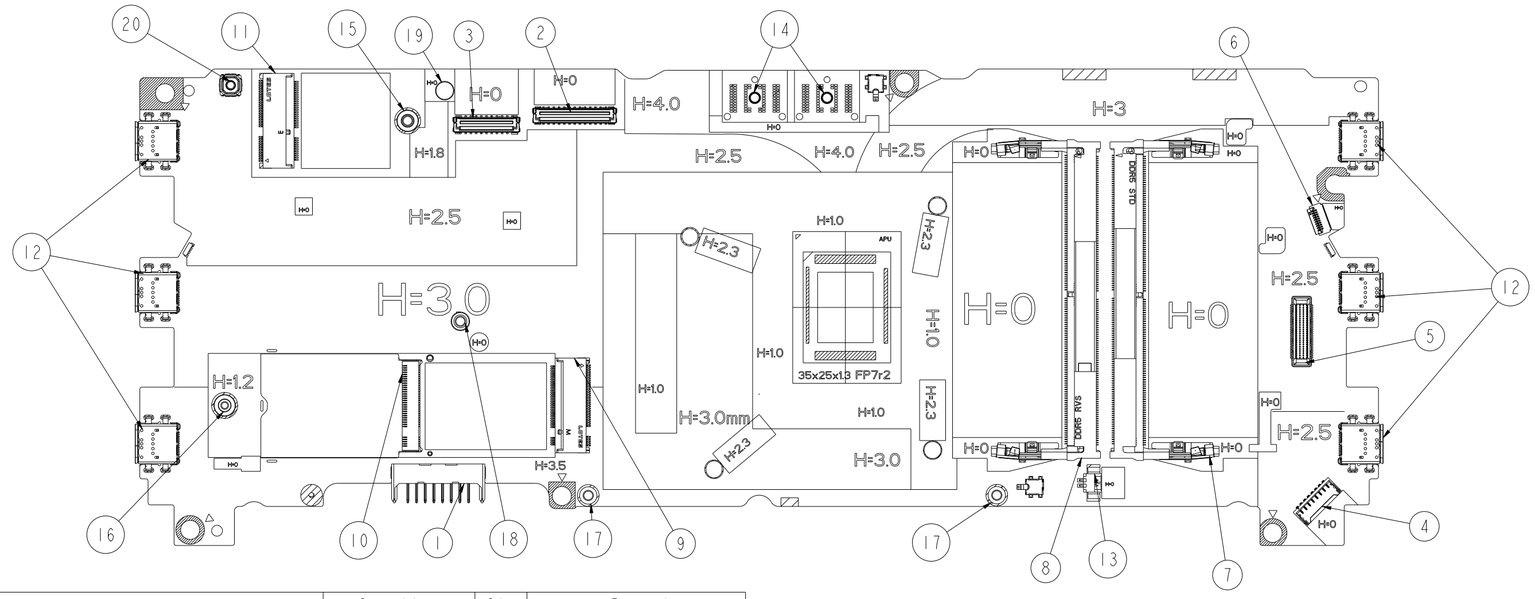


SCALE 1.000

| Item | Function | COMPAL P/N | Description | Supplier | Qty | Rework |
|---|---|---|---|---|---|---|
| 1 | Battery Conn | DC040000I00 | SOCKET BATT BTJ-08TFBRAB 8P | OCTEKCONN | 1 | |
| | | DC04000QA00 | SOCKET BATT 570821-001H 8P | DEREN | | |
| 2 | EDP Conn | SP01002U400 | S H-CONN IPEX 20879-040E-01 40P P0.4 | IPEX | 1 | |
| 3 | Camera Conn | SP01002VR00 | S H-CONN IPEX 20879-040E-01 30P P0.4 | IPEX | 1 | |
| 4 | SpeakerConn | LTCX00BFT00 | S SOCKET ACES 51220-00801-P01 8P H1.45 WTB P1.2 S | ACES | 1 | |
| | | | | | | |
| 5 | Hub Board Conn | SP010037W00 | S H-CONN AMPHENOL 10156000-05I100LF 50P P0.5 | Amphenol | 1 | |
| 6 | FP/ Power conn | SP010033M00 | S H-CONN JIEDUN 24111710021 0P P0.5 | JIEDUN | 1 | |
| | | SP01002X700 | S H-CONN HEFENG AFC42-S10FKA-R0 10P P0.5 | HEFENG | | |
| 7 | DDR5 Top mount_STD | SP07001WG00 | S SOCKET DEREN 567YD2-001HIS1IR-R DDR5 | DEREN | 1 | |
| | | SP07002IU00 | S SOCKET BELLWETHER 80506-4121 262P DDR5 | Bellwhether | | |
| 8 | DDR5 Top mount_REV | SP07001WH00 | S SOCKET DEREN 567YD2-001HIR1IR-R DDR5 | DEREN | 1 | |
| | | SP07002IS00 | S SOCKET BELLWETHER 80507-4121 262P DDR5 | Bellwhether | | |
| 9 | 2280 SSD KEY M | SP07001EZ00 | S SOCKET LOTES APC10079-P005A 67P NGFF | LOTES | 1 | |
| | | SP07001BL00 | S SOCKET BELLWETHER 80159-3221 67P NGFF | Bellwhether | | |
| 10 | 2230 SSD KEY M | SP07001WJA0 | S SOCKET DEREN 5621D3-008H-3B0R-R NGFF | DEREN | 1 | |
| | | SP07001ZAA0 | S SOCKET LOTES APC1A173-P002TC 67P H1.65 NGFF | LOTES | | |
| 11 | WIFI KEY E | SP07001IH00 | S SOCKET LOTES APC10128-P005A 67P M_PCI | LOTES | 1 | |
| | | SP07001BE00 | S SOCKET BELLWETHER 80152-3221 67P NGFF | Bellwhether | | |
| 12 | USB type c | SP06000HTA0 | S CONN ACES 31861-0240D-003 USB | ACES | 6 | |
| 13 | RTC BATT | SP02001SC00 | S W-CONN HEFENG AWB05-S02FCA-RB 2P P1.25 | HEFENG | 1 | |
| | | | | | | |
| 14 | Fbeam Standoff | ES00000NY00 | STANDOFF 0.6H 4.0 1.1H 2.5D M2.0 A | Ronnie | 2 | |
| 15 | Wlan Standoff | ES00000J300 | STANDOFF 1.4H 5.0D 2.0H 4D M2.0 C | Ronnie | 1 | |
| 16 | SSD Standoff | ES00000QI00 | STANDOFF 1.4H 5.0D 0.8H 1.0D M1.4 A | Ronnie | 1 | |
| 17 | MB Support Standoff | ES00000O000 | STANDOFF 4.6H 4.0D 1.0H 3.0D M2.0 A | Ronnie | 2 | |
| 18 | Thermal Standoff | ES00000ON00 | STANDOFF 3.0H 4.0D 0H 0D M2.0 E | Ronnie | 1 | |
| 19 | Antenna Standoff | ES00000OL00 | STANDOFF 2.9H 1.6D 0.8H 4.0D 4.0D F | Ronnie | 1 | |
| 20 | Power Switch | SN111002700 | S TACT SW ACY25 EVQPLHA15 SPST | Panasonic | 1 | |

# CONN LIST

UNLESS SPECIFIED TOLERANCE ARE:
300 ABOVE : ± 0.20
300 ≥ X ≥ 150 : ± 0.15
150 > X ≥ 50 : ± 0.10
50 > X ≥ 20 : ± 0.075
20mm BELOW : ± 0.05
ANGLES : ± 1°
FLATNESS : ▱ 0.20
CONCENTRICITY : ± 0.05

THIRD ANGLE PROJECTION

| PART NUMBER | DESCRIPTION | SPECIFICATION |
|---|---|---|

framework

Laptop 16

MODEL

DESIGNED BY | DRAWN BY

CHECKED BY | APPROVED BY

ISSUED DATE: Jan-30-24 | SCALE: 1.000 | UNIT: mm

DRAWING FILE NAME: Laptop 16 Main Board

SIZE: A2 | SHEET: 1 OF 7 | REVISION: 0 | VERSION: 0