

# **TAI-SAW TECHNOLOGY CO., LTD.**No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C. TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

# **Approval Sheet For Product Specification**

Issued Date:			
Product Name: SAW	Filter 435MHz	SMD 5.0×5.0 mm	
TST Parts No.:TA069	93A		
Customer Parts No.:			
Company:			_
Division:			_
Approved by :			_
Date:			-
Checked by:	Asin Lin		
Approval by:	Francis Chen		
Date:	2007/05/23		



# TAI-SAW TECHNOLOGY CO., LTD. No. 3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532 E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

# SAW Filter 435 MHz

MODEL NO.: TA0693A REV. NO.: 1

### A. MAXIMUM RATING:

1.Input Power Level: 10 dB<sub>m</sub>

2.DC voltage: 3 V

3. Operating Temperature: -40°C to +85°C 4.Storage Temperature: -40°C to +85°C




#### **B. ELECTRICAL CHARACTERISTICS:**

Item			Min.	Typical	Max.
Center frequency	F	c MHz	-	435	-
Insertion loss	430 ~ 440 MHz	IL (dB)	-	2.3	3.3
Amplitude ripple	430 ~ 440 MHz	(dB)	1	0.8	1.7
Attenuation (Reference level from 0 dB)					
Fc-100 to Fc-45	MHz	(dB)	40	45	-
Fc+20	MHz	(dB)	30	37	
Fc+45 to Fc+55	MHz	(dB)	30	40	-
Fc+55 to Fc+100	MHz	(dB)	40	50	-
Source impedance	Zs	$(\Omega)$	-	50	-
Load impedance	ZL	$(\Omega)$	-	50	-


Note1. No matching network required for operation at 50  $\Omega$ 

# C. MEASUREMENT CIRCUIT:

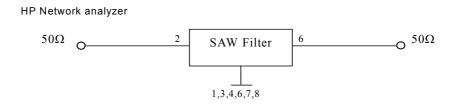


# **D. Frequency Characteristics:**



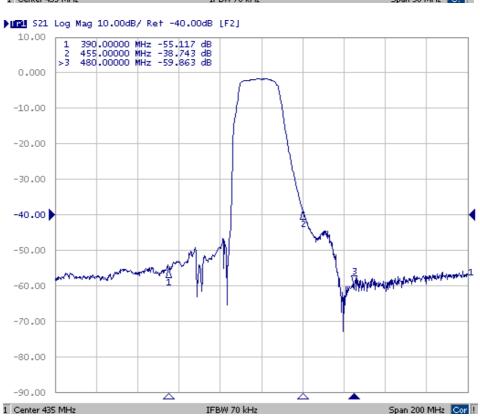


## **E.OUTLINE DRAWING:**

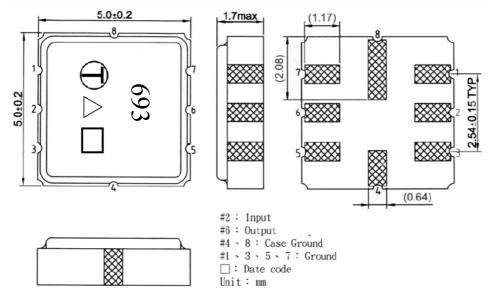

- ☐ Date code: Provided by planer each year


Year	2005	2006	2007	2008
	2009	2010	2011	2012
Product Code	Α	а	<u>A</u>	<u>a</u>

# **F.PCB FOOTPRINT:**




# G. PACKING:

# 1. REEL DIMENSION

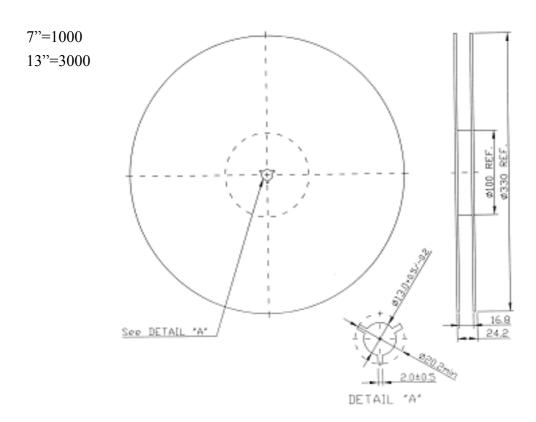

# 2. TAPE DIMENSION

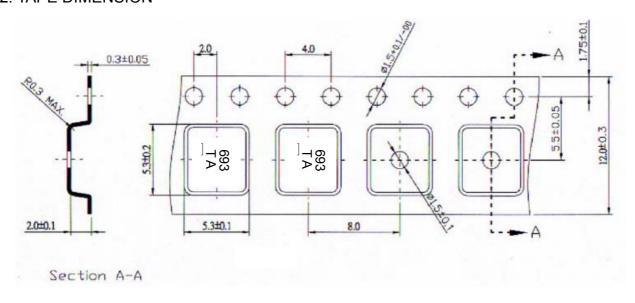

**Direction of Feed** 

# **H.RECOMMENDED REFLOW PROFILE:**

