Sets: assembly and exports

This is an informational translation. The Russian edition is authoritative. Configure a marked set, assemble it on a station or handheld, export its contents and disassemble it in the office.


Document code	MKR-INS-16
Revision	2026.11/01
Effective from	13 November 2026
Revision verification	https://markiro.app/d/MKR-INS-16/2026.11/01/13.11.2026
Language	EN
Operator	Индивидуальный предприниматель Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@markiro.app · +7 934 355-14-90

1. Create the set in the catalogue

For technologists, operators and office staff. Set assembly requires Markiro Autonom 1.7.0 or later on the host and station. For handheld assembly, use the handheld app 1.11.0 or later and update the host first. Prepare the marked items and the Data Matrix labels for the outer packages.

Step 1. Save the recipe

In the office, open «Товары» (Products) → «Добавить набор» (Add set). Enter «Название набора» (Set name) and its own «GTIN набора» (Set GTIN). In «Состав набора» (Set contents), choose an active catalogue item, click «Добавить в состав» (Add to contents), and set the quantity. Repeat for each item and click «Сохранить» (Save). The supported product group is cosmetics, household chemicals and personal care products. A set can contain up to 1,000 individual items.

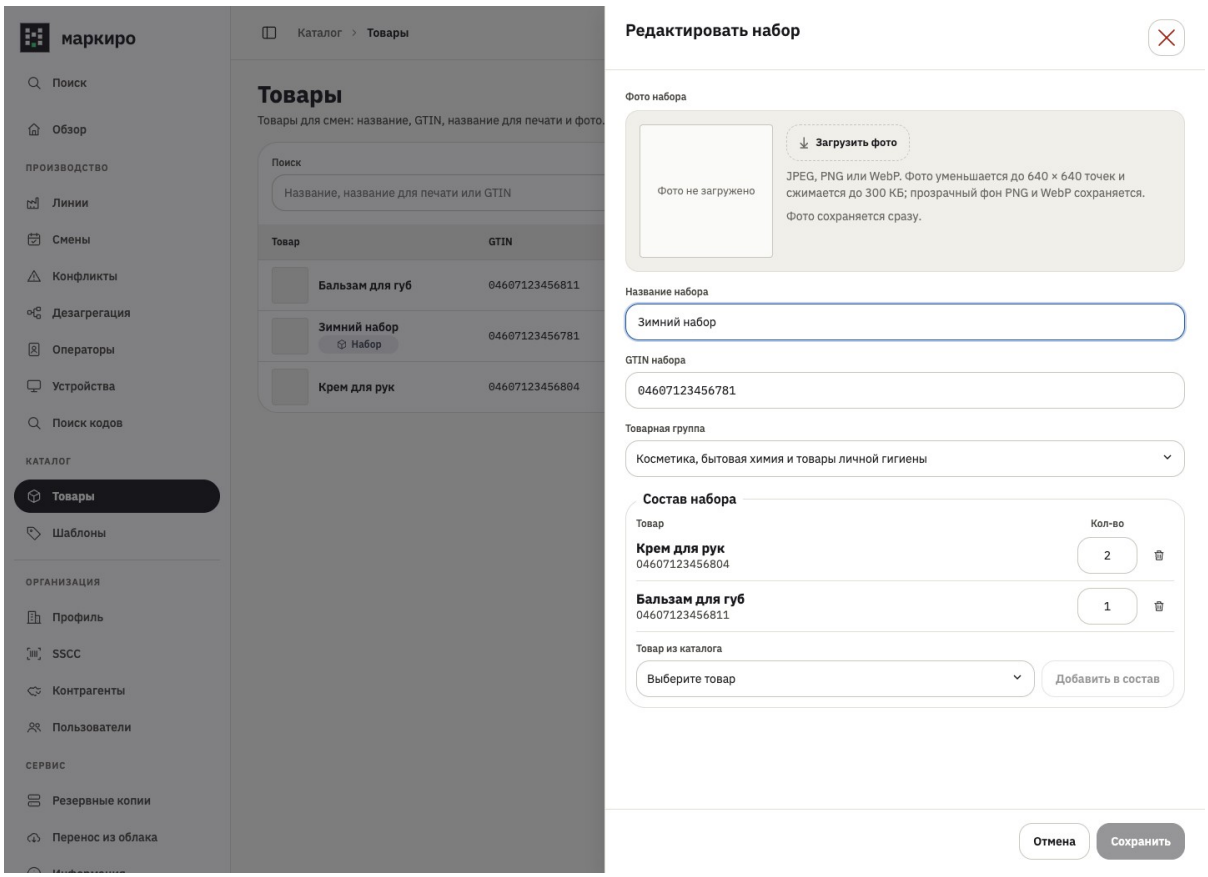

Set card with the quantity for each item

2. Open the shift and assemble a set

Step 1. Select the set for the shift


In the office, open «Смены» (Shifts) → «Запланировать смену» (Plan shift) and select the set. The mode shows «Сборка наборов» (Set assembly). Set the line, dates and optional «План, наборов» (Planned set count). The operator opens the planned shift on the assigned line. To create the shift on a station or handheld, open «Новая смена» (New shift) and select the set or scan its EAN or Data Matrix. This first scan selects the catalogue entry. Check the recipe and click «Начать сборку» (Start assembly) on the station or «Создать и открыть» (Create and open) on the handheld. The shift uses the recipe recorded when it opens.

Step 2. Scan the items

Scan each item's Data Matrix in any order. Check the quantity for each item under «Состав набора» (Set contents). The device reports a duplicate mark, a quantity above the recipe or an item outside the recipe. On the station, «Отменить последний скан» (Undo last scan) removes the last accepted item until the set is complete.

Step 3. Scan the outer package Data Matrix last

When all items have been scanned, the station shows «Сканируйте марку набора» (Scan the set mark) and the handheld shows «Отсканируйте код набора» (Scan the set code). Apply the prepared label to the outer package and scan it. The station shows «Набор собран» (Set assembled) and the handheld shows «Набор сохранён» (Set saved) after saving the recipe for that package. Repeat for the next set. After sync, open the shift card in the office and check the accepted entries and components under «Наборы» (Sets). If there is a conflict, inform the technologist and check the physical contents before exporting.

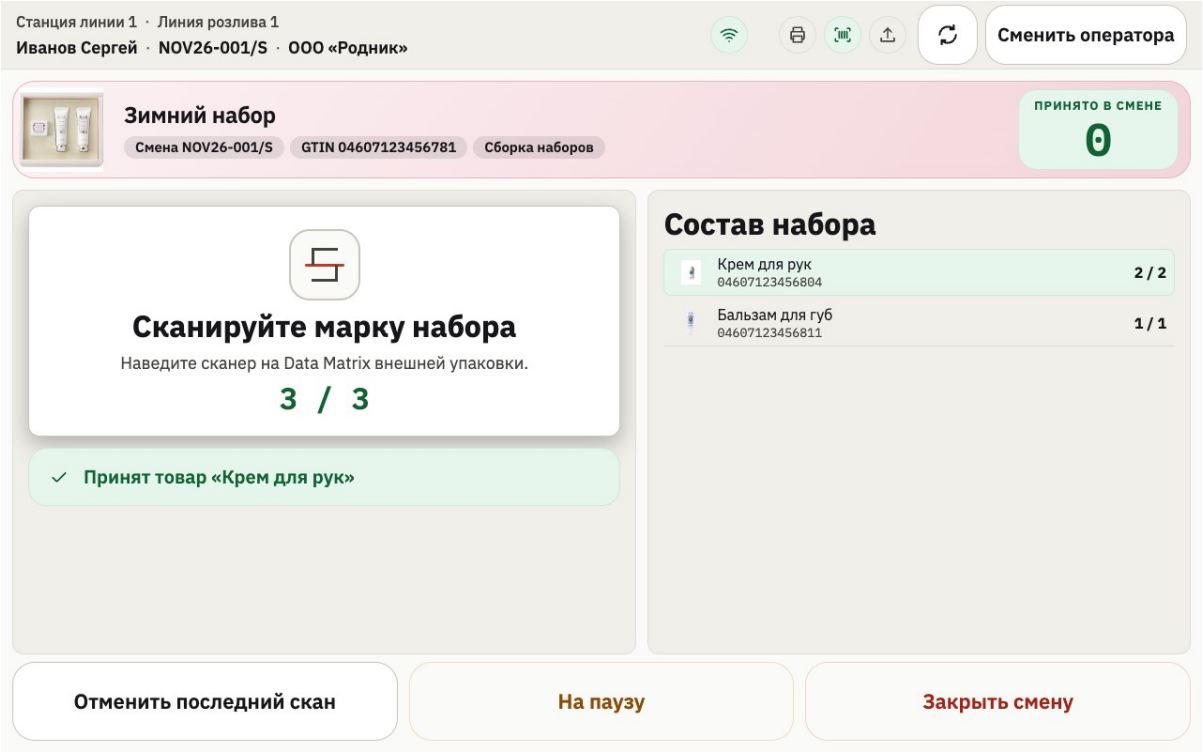


The station waits for the set mark after three items

On the station, «На паузу» (Pause) saves an unfinished set. To close the shift, finish the set or undo its item scans, then confirm the shift closure. Before exporting, wait for the host to accept the records and for the shift status to show «Закрыта» (Closed).

3. Exports

Step 1. Choose an export format

Open the closed shift card and click «Выгрузка» (Export). Choose a format and click «Сформировать и сохранить» (Generate and save). The file contains active sets accepted by the host. A conflict blocks export. New exports exclude disassembled sets.

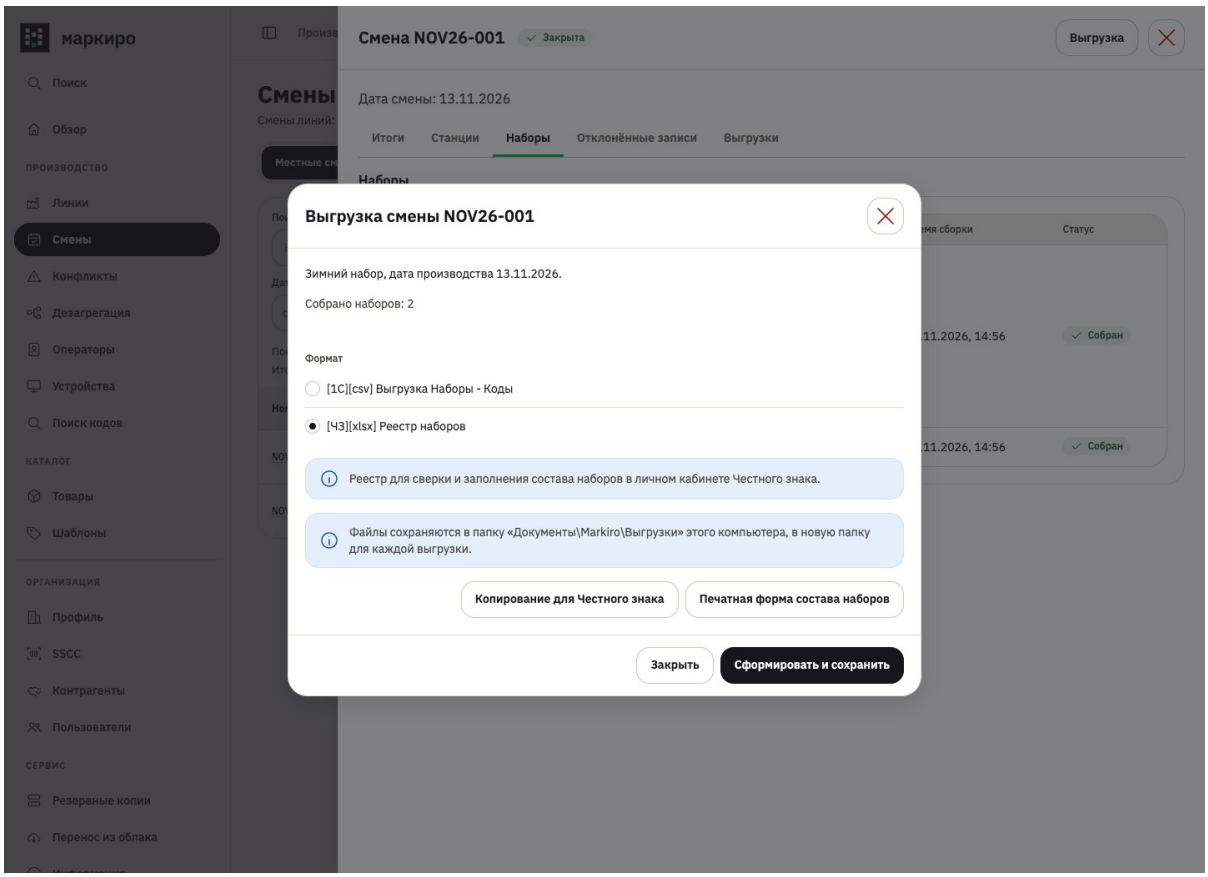

Export formats for a closed set assembly shift

- «[ЧЗ][xlsx] Реестр наборов» (Set register) is a spreadsheet for checking and entering set contents in the Chestny ZNAK account.
- «[1С][csv] Выгрузка Наборы - Коды» (Sets and item codes) is a CSV file for 1C. Each row links an item code to the set code in the «Код упаковки» (Package code) column. When opening it in Excel, select the semicolon delimiter and set both columns to Text to preserve the codes and leading zeros.

Step 2. Open the saved file


Open the export folder from the result dialog or download the file from the «Выгрузки» (Exports) tab on the shift card.

The export dialog also offers «Печатная форма состава наборов» (Printable set contents) and «Копирование для Честного знака» (Copy for Chestny ZNAK). Office staff submit the information in the Chestny ZNAK account.

4. Disassemble a set in the office

Step 1. Post the document after the shift closes

In «Дезагрегация» (Disaggregation), click «Создать документ» (Create document), select a reason and add the set's Data Matrix or identification code to «SSCC или КИ набора» (SSCC or set identification code). Enter one set code per line. Check the «Набор» (Set) level, shift and code count, then click «Провести» (Post) and confirm. After posting and syncing, the item marks can be reused. The outer package mark stays claimed.

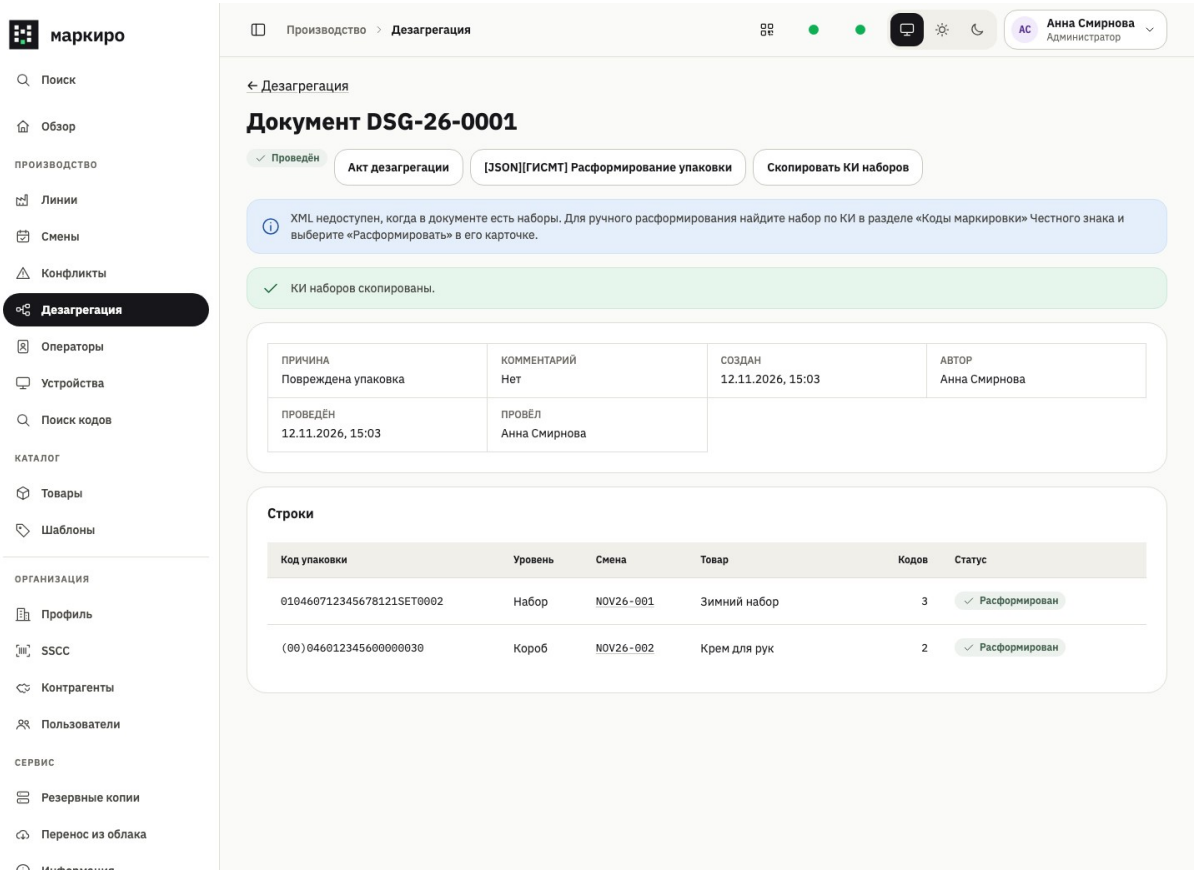

Posted document with a disassembled set entry

If an item comes from a closed box in a closed Autonom shift, accepting the set causes the host to disassemble the whole source box and save a document with the reason «Сборка набора» (Set assembly). An open box or an open source shift blocks acceptance. If the box is registered in Chestny ZNAK, record its disassembly there before reporting set formation.