


WHAT YOU'RE WIRING

- Arrowhead IP Module (Cell Ready Interface)**
- Three wires total: two from the Arrowhead's 2-pin power/trigger block, plus one from Integriti `AUX1 COM` to battery `-`.
 - Arrowhead is powered from the **battery positive**; its negative return is **switched through Integriti AUX1**.
 - Fail-safe logic: AUX1 `NC` is normally closed → Arrowhead sees power. When Integriti activates AUX1 the circuit breaks → monitoring station gets the signal.

TERMINAL MAP

FROM	WIRE	TO
Arrowhead <code>-</code> (negative)	BLACK	Integriti <code>AUX1 NC</code>
Arrowhead <code>+</code> (positive)	RED	Battery <code>+</code> (positive)
Integriti <code>AUX1 COM</code>	BLACK	Battery <code>-</code> (negative)


Circuit logic: AUX1 sits in series between the battery negative and the Arrowhead's negative leg. While AUX1 is at rest (NC closed), the Arrowhead sees a complete circuit; when Integriti energises AUX1 the NC opens and the Arrowhead loses its negative return, that's the trigger.

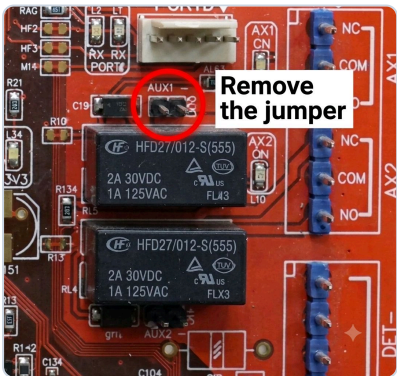

AUX1 relay header — EOL jumper shown, remove it

Before power-on: Double-check that the EOL jumper has been removed before turning on the power.

WIRING DIAGRAM

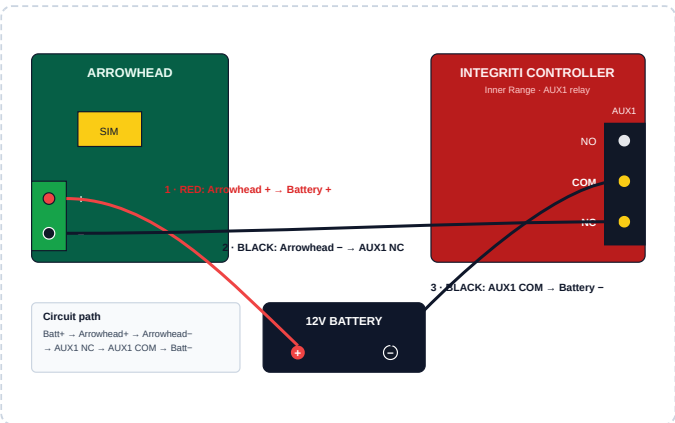

INSTALL STEPS

- Power down** the Integriti: disconnect AC, then unplug the backup battery leads. Verify no LEDs are lit.
- Locate AUX1** on the Integriti board. Identify `NO` / `COM` / `NC` for the AUX1 relay.
- Remove the EOL jumper** on the AUX1 header (see photo). Double-check it has been removed before turning on the power.
- Wire 1: Arrowhead to AUX1 NC:** run a black wire from the Arrowhead *negative* pin into Integriti `AUX1 NC`.
- Wire 2: Arrowhead + to Battery +:** run a red wire from the Arrowhead *positive* pin directly to the backup battery `+` terminal.
- Wire 3: AUX1 COM to Battery -:** run a black wire from Integriti `AUX1 COM` to the backup battery `-` terminal.
- Restore power:** reconnect the battery leads (positive wire first then negative), then AC.
- Test:** AUX1 using the terminal keypad switching ON & OFF the `C01:X01`.