



# TRIUMF

Document-131404

## Design Note TRI-DN-16-11 UCN Kicker Control and Diagnostics Work Request

**Document Type:** Design Note

**Release:** DRAFT

**Release Date:** 2016/00/00

**Author(s):** Thomas Lindner

	<b>Name:</b>	<b>Signature:</b>
<b>Author:</b>	Thomas Lindner	<b>APPROVAL RECORD</b>
<b>Reviewed By:</b>		
<b>Approved By:</b>		

*Note: Before using a copy (electronic or printed) of this document you must ensure that your copy is identical to the released document, which is stored on TRIUMF's document server.*

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

#### History of Changes

Release Number	Date	Description of Changes	Author(s)
#01	2016/00/00	Initial release	Thomas Lindner

**Keywords:** list of keywords

**Distribution List:** list of names

DRAFT



## Proposed time division of beam

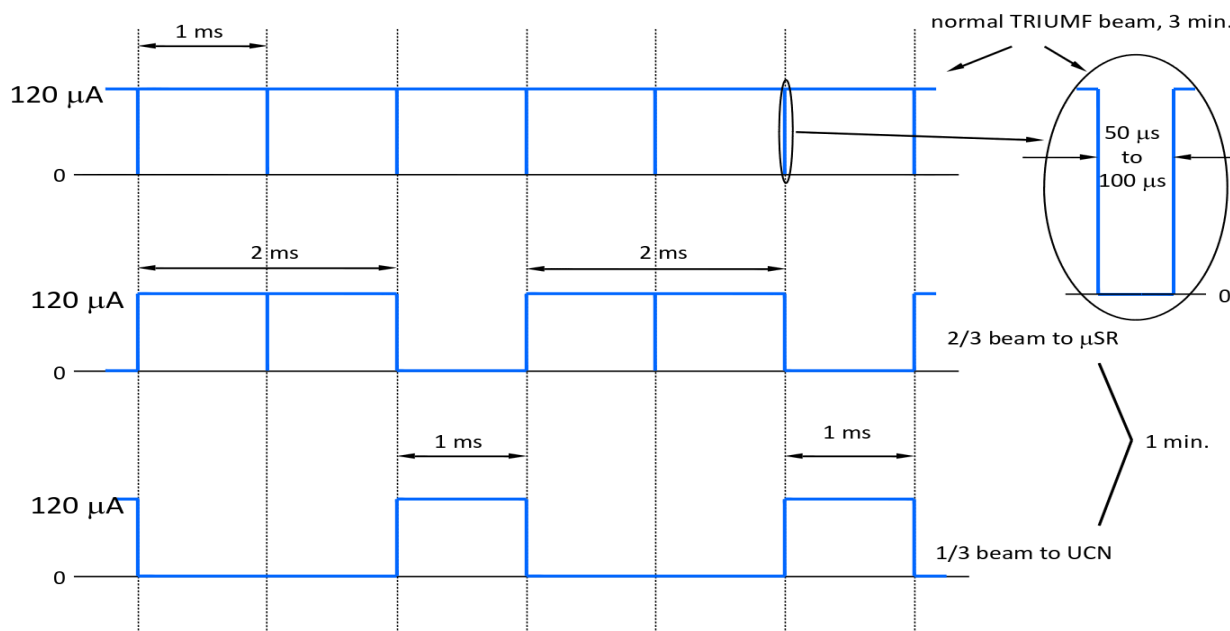


Figure 2: scheme for dividing beam between beamline 1A and 1U. In final configuration 1/3 of beam buckets go to 1U. Note the kicker magnet must ramp up and down within the blanking notches.

To deflect a beam bucket to UCN, the kicker magnet ramps up during the 50  $\mu\text{s}$  blanking interval, deflects the bucket to the UCN line, then ramps down again in the 50  $\mu\text{s}$  blanking interval following the beam bucket.

The Kicker control must deliver a signal synchronized with the arrival of the beam at the kicker. Since the beam takes approximately 330  $\mu\text{s}$  to travel from the ion source to extraction, and the time can vary by some tens of  $\mu\text{s}$  depending on the machine tune, it is necessary to have a suitable beam current monitor near the kicker. This is provided by the 1VM4 capacitive beam monitor located just downstream of the kicker (see “UCN Kicker Time Pickoff” below). The kicker control system can use the 1VM4 signal to confirm that the kicker trigger is locked to the real beam at the kicker magnet.

It is also important to measure the amount of beam present during the blanking notch. During this time, the beam sweeps from the straight-through port of the septum magnet to the magnetic field section that deflects the beam to UCN (see picture in appendix). If any beam is present during the sweep, it will hit the steel of the septum. The slower the beam sweeps, the more will be spilled on the septum. Assuming the slowest of 50  $\mu\text{s}$  for the full sweep, the beam will cross the septum steel and beam pipe wall during the time from 18  $\mu\text{s}$  to 32  $\mu\text{s}$  after firing the kicker. In this interval the beam current should be below 430 nA to limit the spill onto septum to 1 nA averaged over the UCN cycle. If the beam monitor indicates notch contamination exceeding this

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

limit, we can blank the kicker trigger and not kick until the contamination is once again under the limit. For good signal to noise ratio, the 430 nA limit based on long term beam spills could be measured with several seconds of averaging. Spills large enough to cause a radiation trip of the cyclotron will be detected by the nearby TRIUMF beam spill monitors.

Finally, it should be noted that these fast kicker cycles (ramping up to spill one bucket onto UCN target, ramping down to send two buckets to beamline 1A) is superimposed onto a slower UCN cycle, where we want to put beam onto the UCN target for 1 minute (to produce UCNs) and then have a 3 minute period to do measurements of the UCNs. This 1-minute ON, 3-minute OFF cycle would then be continuously repeated in final UCN operations.

## Overview of Kicker Control System

Given the context described above, one possible organization of the kicker control system is shown below:

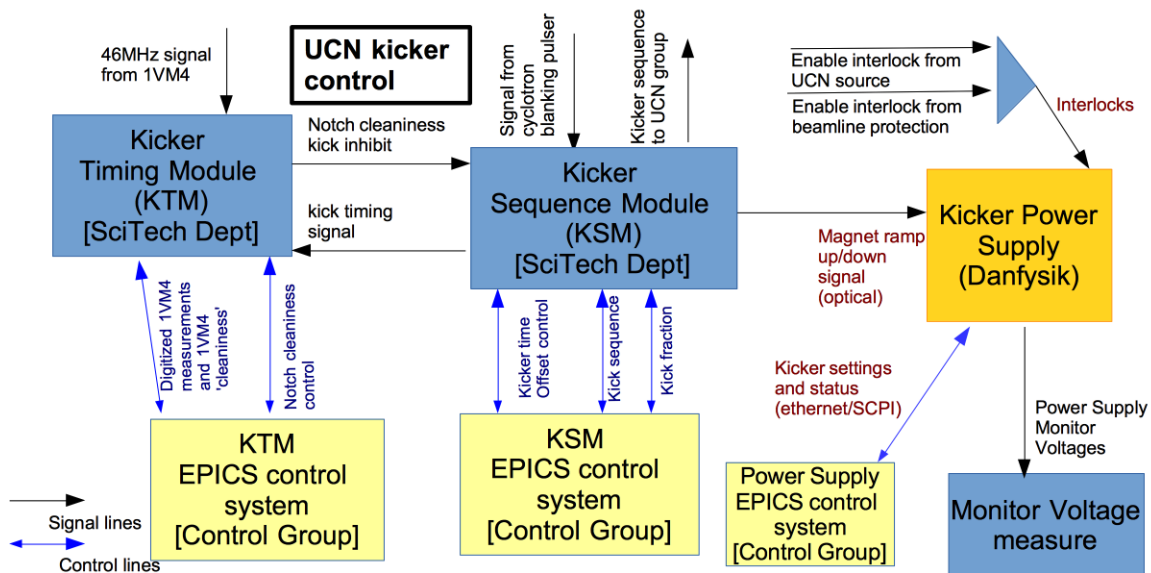


Figure 3: Proposed system for controlling kicker magnet.

The main components of the control system are

- 1) Power supply EPICS control system: this system would provide the EPICS control of the kicker magnet power supply.
- 2) Kicker Sequence Module (KSM): this custom designed electronics module would handle the following:
  - a. Creating a kick signal; i.e. adding a fixed delay to the signal from the cyclotron blanking pulser.
  - b. Creating the short and long timescale sequence of kicks.

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

- c. Actually ramping the magnet.  
We assume that the hardware and firmware for this module would be provided by the Science Technology department. It may be possible to use an existing module for the hardware.
- 3) KSM EPICS control system: this system would provide the EPICS control of the kicker sequencing.
- 4) Kicker Timing Module (KTM):
  - a. Digitizing the signal from the 1VM4 capacitive beam monitor.
  - b. Making a decision about whether the kick signal is well aligned with the notch and notch background is sufficiently low.  
We assume that the hardware and firmware for this module would be provided by the Electronics Development group.
- 5) KTM EPICS control system: this system would provide the EPICS control of the 1VM4 digitization and the kick inhibit.  
We assume that the EPICS components would be handled by the controls group.

We will describe these modules more below, as well as describing the 1VM4 signal.

## Danfysik Power Supply EPICS Control System

The EPICS control system would provide control of the actual kicker power supply to the cyclotron operations group. Danfysik provided detailed user manual for power supply; a link to the manual is given at the end of this document.

Remote configuration and monitoring of the power supply is provided through an Ethernet interface, using the SCPI protocol. Table 4 (page 27) of the power supply manual provides all the available SCPI commands. I would imagine that the EPICS control should provide access to all the listed configuration options and read-back information.

## Kicker Sequence Module (KSM)

This module is in charge of creating the sequence of kicks that will actually drive the kicker power supply. Figure 4 shows the logic inputs/output from this module, as well as the VME control interface are shown below.

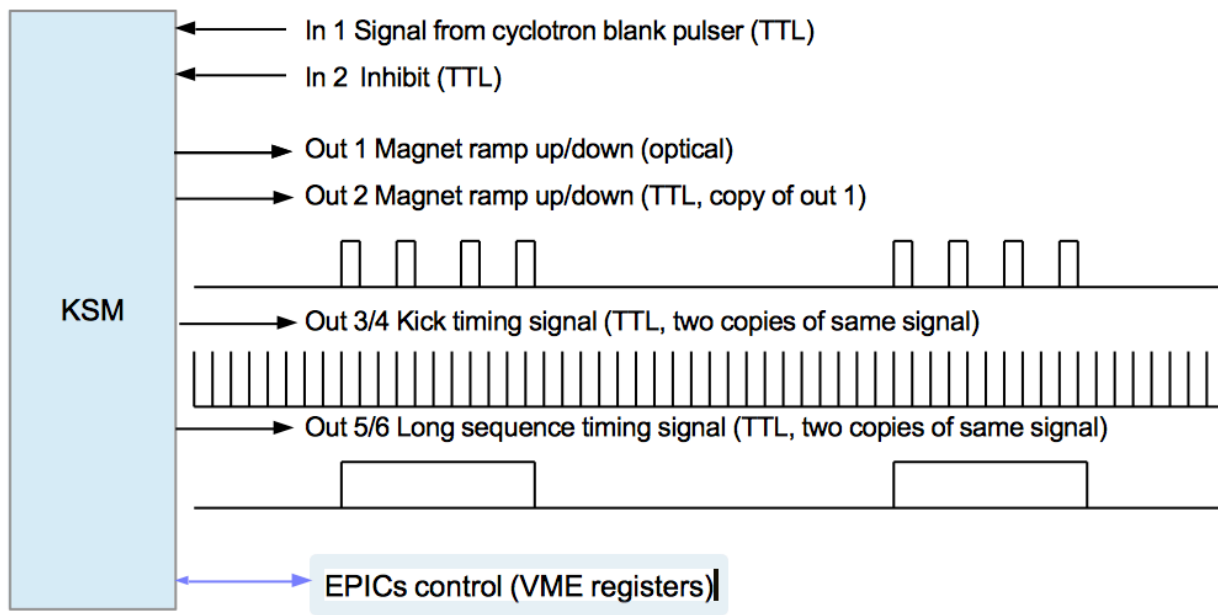


Figure 4: logical inputs and outputs of KSM

For the KSM we have converged on re-using a VME module called a PPG (Programmable Pulse Generator) which was developed by the electronics development and DAQ groups and is used by a number of experiments around TRIUMF. New firmware will need to be developed for the PPG, but the existing hardware should satisfy the KSM requirements. (Note the PPG does not have an optical output. It may be possible to retrofit a KSM module with an optical output. Otherwise we would use an external TTP->optical adaptor. Daryl already seems to have some of these.)

This module would start by defining the time at which the magnet kick should start. This time could be by adding a fixed offset to the time from the cyclotron blanking pulser signal (input 1). The operator would need the ability to change the time offset of the kick signal (parameter PULSER\_OFFSET). A copy of this **adjusted kick time** would be available on outputs 3 and 4.

The KSM would then define the actual short term and longer term sequence for kicker magnet; i.e. define the short term cycle of kicking of a fraction of the beam buckets and the longer 1 min. beam-on / 3 min. beam-off cycle for normal operation. As mentioned earlier, there would need to be a large number of different modes and configurability in defining the longer term sequence. For a starting point we would want the ability to operate the KSM and kicker with the following different modes:

- 1) Operate the kicker magnet to permanently on so all beam gets directed to BL1U (parameter KICKER\_DC\_MODE). This would mean setting the magnet output (output 1) to permanent high.
- 2) Operate the kicker magnet where we kick a fraction (parameter KICK\_FRACTION) of beam buckets to beamline 1U. It would repeat kicking a fraction of buckets for a

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

configurable ON period (parameter BEAM\_ON\_PERIOD) then shut off magnet for a configurable OFF period (parameter BEAM\_OFF\_PERIOD). It would repeat these ON / OFF periods for a configurable number of **long cycles** (parameter NUM\_LCYCLES).

- 3) Operate the kicker magnet in a manner identically to 2, except that the ON/OFF cycles would continue for ever (parameter BEAM\_CONTINUOUS\_CYCLE).

The **sequences** in modes 2 and 3 would be started by writing to a VME register (START\_SEQUENCE). We show a diagram showing a mode 2 or 3 sequence in Figure 5.

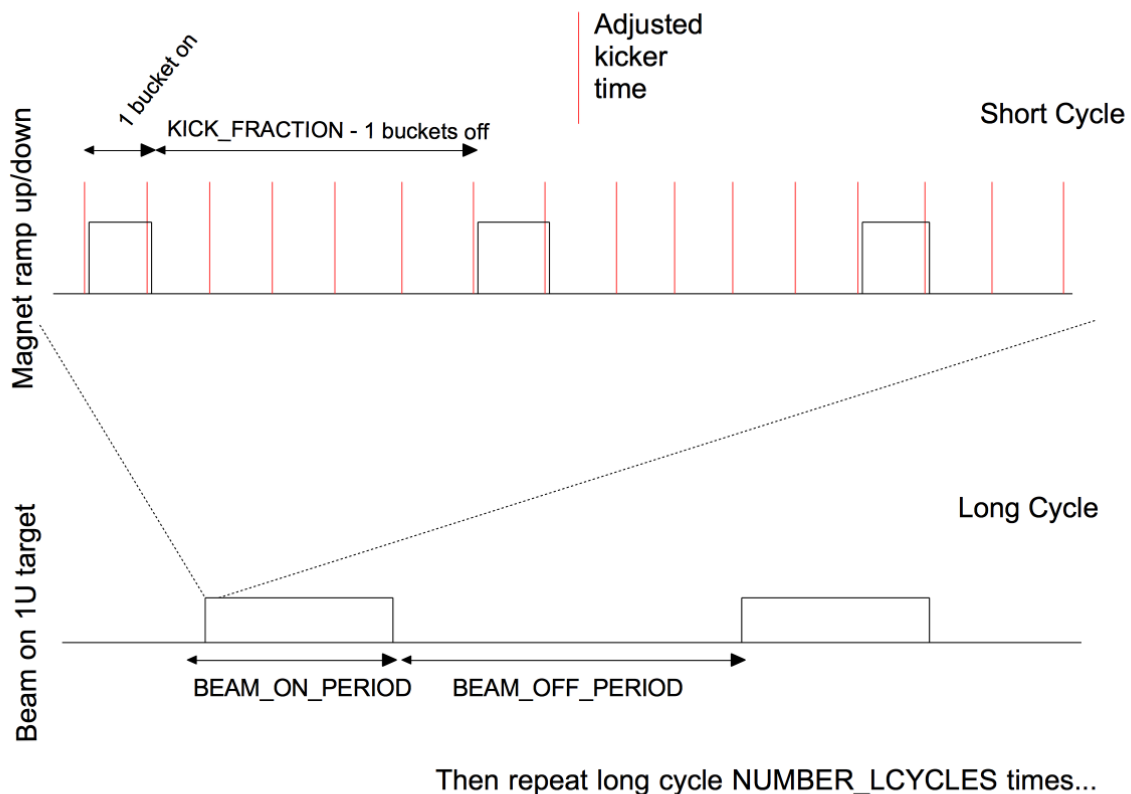


Figure 5: diagram of short and long kicker cycles.

Table 1: List of VME Parameters

VME Parameter Name	Parameter Function	Type ; unit
KSM_ENABLE	If set to 1, then the KSM can start kicker sequences or set kicker in DC mode If set to 0, then the KSM will not operate	r/w ; n/a



UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

	magnet (ie, output 1 will not go high).	
KICKER_DC_MODE	Setting this parameter to 1 will set permanently turn on the kicker magnet, ie set output 1 high.	r/w ; n/a
PULSER_OFFSET	Fixed offset to add to cyclotron blanking pulser before subsequent operations	r/w; Clock units (10ns)
KICK_FRACTION	Defines fraction of beam buckets kicked to beamline 1U. Specifically, means we will kick one bucket to 1U and then let KICK_FRACTION-1 buckets go to beamline 1A; so 1/KICK_FRACTION buckets will go to 1U.	r/w ; n/a
BEAM_ON_PERIOD	Defines length of beam ON period (with fraction of buckets going to UCN)	r/w; milliseconds
BEAM_OFF_PERIOD	Defines length of beam OFF period (with no beam going to UCN)	r/w; milliseconds
NUM_LCYCLES	The number of ON/OFF cycles to perform before stopping	r/w; cycles
BEAM_CONTINUOUS_CYCLE	Writing 1 to this register would set the KSM to use a continuous (never ending) sequence. Writing 0 would mean a cycle ends after NUM_CYCLES.	r/w; n/a
START_SEQUENCE	Writing 1 to this register would start the magnet kicks. This would have no effect if a sequence is already in progress.  Writing 0 to this register would stop any ongoing sequence.  Register has no effect in DC mode.	r/w ; n/a
KSM_STATUS	Bit 0 : is magnet on Bit 1 : is in sequence Bit 2 : is KSM inhibited Bit 3 :	r/o; bit-field

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

CYCLE_STATUS	Number of cycles executed since sequence started.	r/o ; bit-field

The KSM will also have an inhibit input. If the inhibit input goes high then the KSM should immediately ramp down kicker magnet (if it is on) and stay down.

Additionally, the KSM should have some logic where the magnet will always get ramped down after 2ms (unless in DC mode). This will protect against a situation where the KSM ramps the magnet up on one blanking notch, but the signal from the blanking notch then goes away (for whatever reason).

## KSM EPICS Control System

The EPICS control system would provide control of the KSM to the cyclotron operations group. Important parts of this control would include:

- I. Enabling the KSM for operation.
- II. Configuring the sequencing that will be controlled by the KSM module.
- III. Starting a particular sequence or setting the kicker to DC mode.
- IV. Reading/controlling PLCs that monitor the various kicker interlocks. These interlocks would include –
  1. The Enable interlock from UCN Source will have to also include an "UCN Area enable" (area armed, gates locked, certain magnets ON, and Beam-blocker OUT).
  2. The Enable interlock from beamline controls will have to include a BL1A enable (i.e. a "BL1A ON/BL1B OFF" condition, because the dipole magnet 1BVB2 sits between the kicker and septum magnets, and is ON when BL1B is running). The prescaler or BL1U:BL1A current ratio is also folded into this signal, we presume.

## UCN Kicker Time Pickoff

The TRIUMF beam has a microstructure of bursts a few nanoseconds wide separated by 43 nanoseconds (RF frequency 23 MHz). The time monitor is a capacitive pickoff, 1VM4, located just downstream of the kicker. The pickoff is sensitive to the 23 MHz microstructure. The raw signal is fed to a broadband preamp followed by a tuned second stage operating at the second harmonic, 46 MHz. The output of the tuned stage is a 46 MHz sine wave whose envelope follows the beam current. The bandwidth of the second stage can be adjusted to trade settling time against noise (low noise = long settling time). It is now set to settle (several 1/e time constants) in 1  $\mu$ s. At this time constant, the electronic noise is 0.15  $\mu$ A. The monitor and front-end electronics are already in place.

The electronics handles beam currents of 0  $\mu$ A – 120  $\mu$ A. The input is triax cable from the capacitive pickoff and the output is normal Coax. Leonid Kurchaninov has the details. We have to use the signal from the time pickoff to deliver a kicker signal synchronized with the arrival of

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

the beam at the kicker, and to prevent kicking if the contamination in the beam-off-notch is too high.

## **Kicker Timing Module (KTM)**

The first task of this module is to digitize the signal from the tuned 1VM4 signal. We would start by demodulating the 46 MHz signal down to a signal with 1us variations. We would then digitize the signal with a sampling of 0.2-1.0 MHz. The digitized signal should clearly show the 50  $\mu$ s notches in which we want to kick the magnet.

The module would then analyze the digitized 1VM4 signal in order to determine how much beam background was present in the magnet ramping period. It would use the kick timing signal from the KSM to define when the ramping period starts; the kick timing signal is just the beam notch signal with a modifiable offset. In order to get good signal to noise the module might need to average a number of notches before measuring the beam background. The operator will need to specify a limit for the beam background. Based on the results of the analyzed 1VM4 signal the KTM would be able to inhibit the KSM if the 1VM4 shows misaligned or unclear blanking notches.

For diagnostic purposes we would also want to have a way of reading out and examining the digitized 1VM4 signals.

Challenges for KTM: it may be hard to accurately measure the blanking notches if the cyclotron is running at low beam power.

## **KTM EPICS Control System**

The EPICS control system would provide control of the KTM to the cyclotron operations group.

## **Kicker Power Supply Monitor Voltages**

The kicker power supply provides a set of analog signals that follow the input/output current and voltages provided by power supply. We may want to monitor these signals or use them to provide some additional system interlocks.

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

## Staging and timeline of Work Request

We would suggest that the kicker control work be staged as follows:

- Stage 1: the controls groups would only implement the control functionality of the magnet power supply; this would allow for the operation of the kicker magnet in ‘DC mode’, ie where all the beam was directed to 1U during summer 2016.
- Stage 2: the SciTech and controls groups would only implement the control functionality of the KSM module. The KSM module is the critical piece necessary to actually operate the kicker in its regular, kicking mode; having this module would allow for earlier commissioning of the UCN beamline in fall 2016
  - In stage 1 and 2 we would manually monitor the 1VM4 signal using a scope or some other commercial digitizer, but would not require any automatic feedback from the 1VM4 measurement to the KSM. This would allow us to make better measurements of the 1VM4 signal and confirm how best to digitize and analyze it.
- Stage 3: based on the results of the first stage, the edev and controls groups would then create the KTM module.

## Related Documents

For reference, see additional documents on –

UCN kicker power supply user manual (from Danfysik)

<https://ucn.triumf.ca/triumf/magnets/kicker/User%20Manual-%20CAN501996-201%20TRIUMF%20UCN%20Kicker%20MPS.pdf/view?searchterm=User%20manual>

UCN beamline operations ??

UCN beamline machine protection ??

UCN Kicker Control and Diagnostics Work Request		
Document-131404	Release No. DRAFT	Release Date: 2016/00/00

## Appendix:

### TRIUMF UCN Septum Magnet


Beam current must be less than 430 nA when it sweeps over the beam pipe wall and septum

Keeps time averaged beam spill to <1 nA

Deflected beam here →


Steel septum →

Undelected beam here →

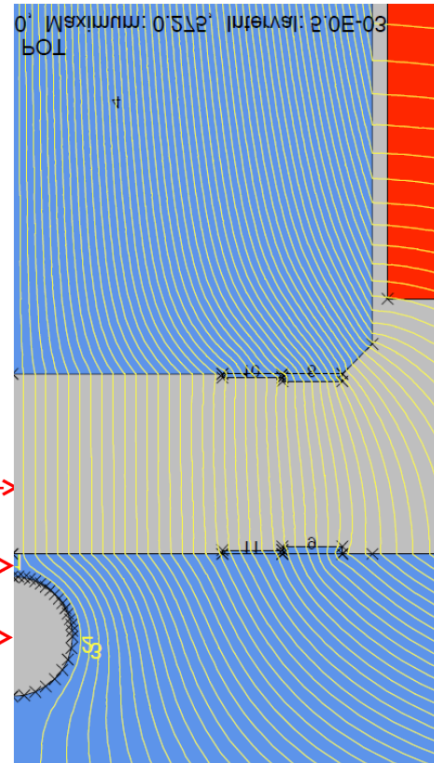

1

## Beam current and deflection at 90% duty cycle

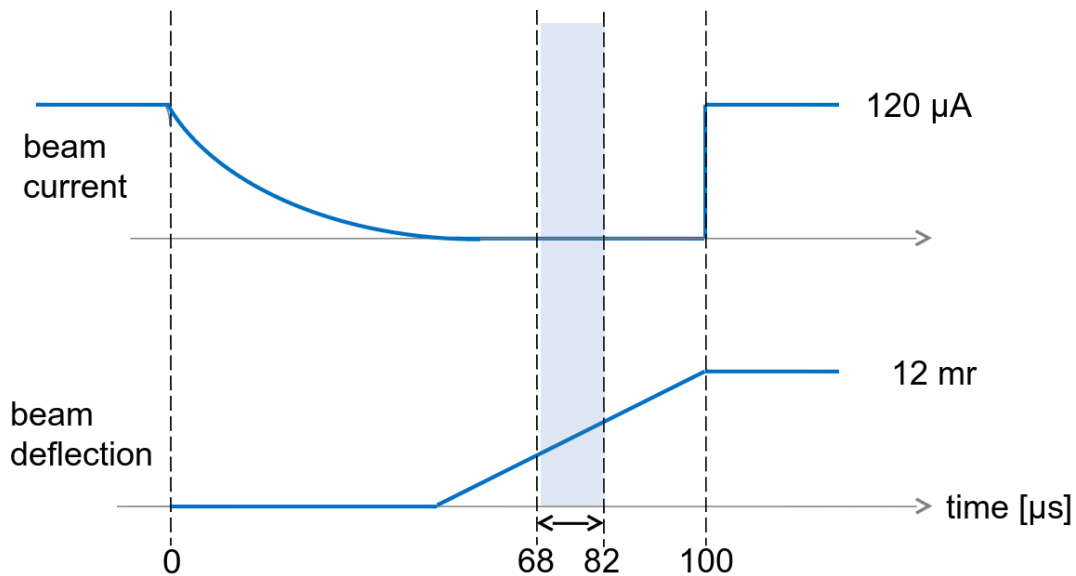

If the beam does not cut off cleanly at the start of the pulser notch, the kicker sweep could be delayed. 90% duty cycle would give us the option of up to  $50\ \mu\text{s}$  delay.