

Table of Contents

Table of contents	1
1. Introduction	2
2. Specification.....	2
3. Installation Environment	2
(2) WLAN Router Environment	2
4. Start Installation.....	2
(1) Wiring Installation	3
(2) Mobile Phone Installation Application	3
(3) Connect the Smart Switch to Home WiFi via the APP	3
(4) Connect Your Switch to Alexa	4
5. Start after use.....	4
(1) Mobile Control	4
(2) Voice Control via Google Home/Echo Alexa/Siri	4
(3) Timer Function	5
(4) Group control	6
(5) Background Light Control.....	6
(6) Multiplex Control (Software Implementation)	6
6. After Sales.....	6
(1) ow to Provide Feedback	6
(2) How to Extend the Warranty Period	7
7. FAQ	7
(1) What Should I Do If the Switch's WiFi Connection is Disconnected?	7
(2) How to Check the Virtual Device ID and WiFi Signal Strength?	7
(3) What Should I Do If the Buttons on the Panel Do Not Respond?	7
8. Download Manuals in Other Languages	7

1. Introduction

Thank you for choosing us. The CURRY series brand is committed to developing the most user-friendly smart home products, hoping to provide customers with a better product experience. This product complies with Amazon's return policies. If you want to extend the exchange period to 180 days, please follow Step 6.2.

Important steps in this manual (installation & usage & function introduction) are accompanied by operation videos. You can install and use it under the guidance of the video.

Instructional video: → bit.ly/w02video ←



2. Specifications

- *Product Name: WiFi Smart Switch
- *Model: W021/W022
- *Operating Voltage: 100-240V 50/60Hz
- *Max peak current: 16A
- *Max peak power: 3800 W
- *Standby consumption: <1W
- *Wifi Protocol: 2,4 GHz 802.11 b/g/n
- *Switch Standard: EU
- *Material: V0 PC flame retardant
- *APP: Smart Life/Tuya/CURRYSMARTER


3. Installationsumgebung

- (1) **A neutral wire must be used.**
- (2) **Wifi router environment**
 - ① Your smartphone or tablet should be connected to the router's 2.4G frequency and have internet access. (The device only supports 2.4G networks. Do not use the router's 5 GHz or mixed mode of 2.4 GHz and 5 GHz during network configuration.)
 - ② Ensure your iOS or Android device and switch are within the range of the same router network.
 - ③ Enter the correct WiFi password. It is recommended that the WiFi name and password do not contain special characters and do not exceed 15 characters in length, as this may cause a network configuration error.

4. Start Installation

*Please have the product installed by a professional electrician to avoid short-circuit damage to the device!

(1) Wiring Installation

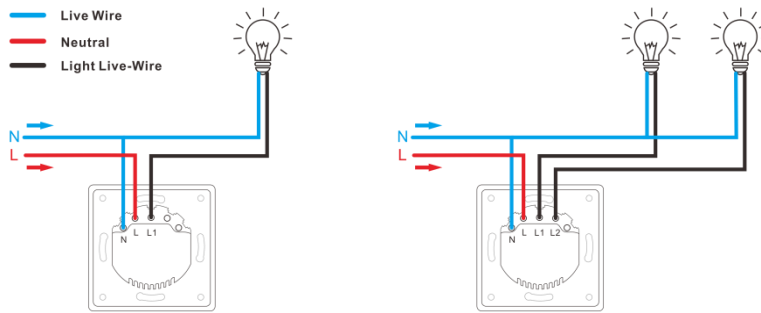

- 1) Disconnect the power supply
- 2) Remove the old switch and mark the cables
- 3) Wire the shutter switch according to the wiring diagram
- 4) Secure the switches sequentially
- 5) Turn on the power

(2) Mobile Phone Installation Application


- ① Scan the QR code below with your mobile phone or search for "Smart Life" in the Apple Store or Google Play to download and install it.



- ② Enter your account name and password to log in. If you don't have an account, please register first. You can use your phone number or email address as your account name.


(3) Connect the Smart Switch to Home WiFi via the APP

- ① Connect the phone to the local WiFi (2.4 G).
- ② Ensure the blue light of the button indicator is blinking quickly; the factory setting is the fast blinking mode. (Manually switch to network distribution mode: Press and hold the "Switch Button" for 10 seconds until the blue indicator blinks quickly.)
- ③ Turn on your mobile phone's Bluetooth, and the device information will automatically appear. If you don't see it, simply refresh the app or click the "+" button in the upper right corner of the homepage; the searched Bluetooth devices will appear, and then click Add.
- ④ Select WiFi and enter the correct password. Wait for the configuration to be successful after confirmation.

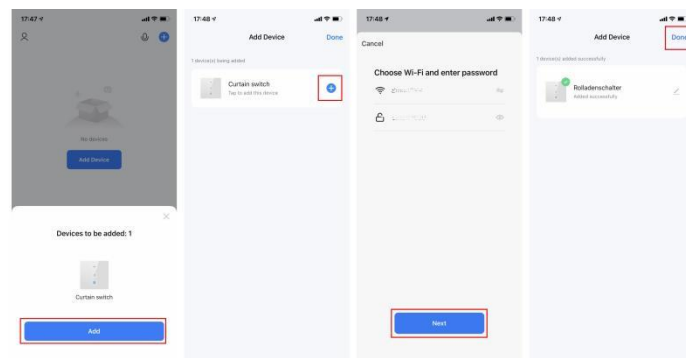


(4) Connect Your Switch to Alexa

- ① Select "Profile" in the Smart Life APP
- ② Select "Alexa" in "Third-party Voice Services"
- ③ Click "Sign in to Amazon"
- ④ After signing in to the Alexa APP, it will automatically jump to the binding interface; then click "LINK" and wait for the binding to complete.

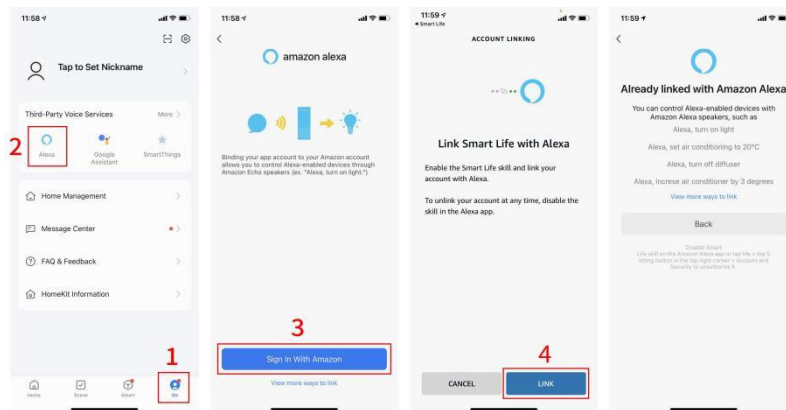

5. Start After Use

(1) Mobile Control

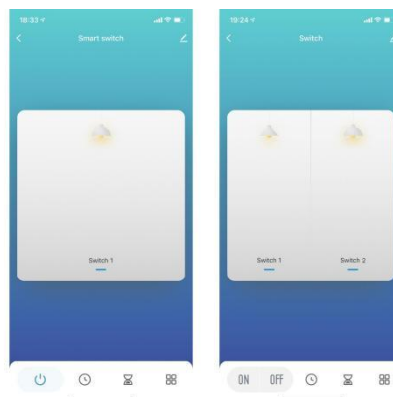

You can control the electrical appliances at the socket in the APP after the configuration in Step 4.2 is successful. As long as your mobile phone has a network (including 2G/3G/4G/5G/WiFi), you can use your mobile phone anytime and anywhere to remotely control household appliances.

(2) Voice Control via Google Home/Echo Alexa/Siri

1) Alexa

Before voice control, you must first identify the device name. You can also click "✎" in the upper right corner of the Smart Life APP device control interface to rename the device. The following voice commands are supported by Alexa: "Alexa, turn on/off"

2) Google Assistant


The following voice commands are supported by Google Assistant: "Google, turn on/off."

3) Siri/Mobile phone add shortcut command widget


- Siri can trigger the "Tap-to-Run" intelligent scene, first of all, you need to create an "Tap-to-Run" automated command.
 - a. Klicken Sie in der Smart Life APP auf „Szene “ und dann auf „Szene erstellen “ oder „+ “ in der oberen rechten Ecke;

- b. Wählen Sie „Tippen Sie hier, um den Betrieb a...“;
- c. Klicken Sie unter „Ausführen“ auf „Aufgabe hinzufügen“, z. B. „Betreiben Sie das Gerät“;
- d. Wählen Sie das zu steuernde Gerät aus;
- e. Wählen Sie die spezifische Funktion aus, die ausgelöst werden muss, z.B. "Switch" - "ON" - "Speichern" - "Weiter" - klicken Sie zu diesem Zeitpunkt auf "..." in der oberen rechten Ecke, um diesen Vorgang zu benennen z.B.: "abc". Klicken Sie auf "Speichern".
- f. Klicken Sie auf „ Hinzufügen zu Siri“ in der unteren rechten Ecke und wählen Sie den soeben erstellten Befehl „abc“ aus;
- g. Stellen Sie die Auslösestimme von Siri ein, zum Beispiel, wenn ich sage: „Hallo Siri“; Führen Sie den Befehl „abc“ aus und klicken Sie schließlich auf „Zu Siri hinzufügen“.

An diesem Punkt können Sie „Hallo Siri“ zu Siri des iOS-Gerätes (Telefon/Tablet/Uhr) sagen, und das Gerät führt automatisch den Befehl aus, das Licht einzuschalten.

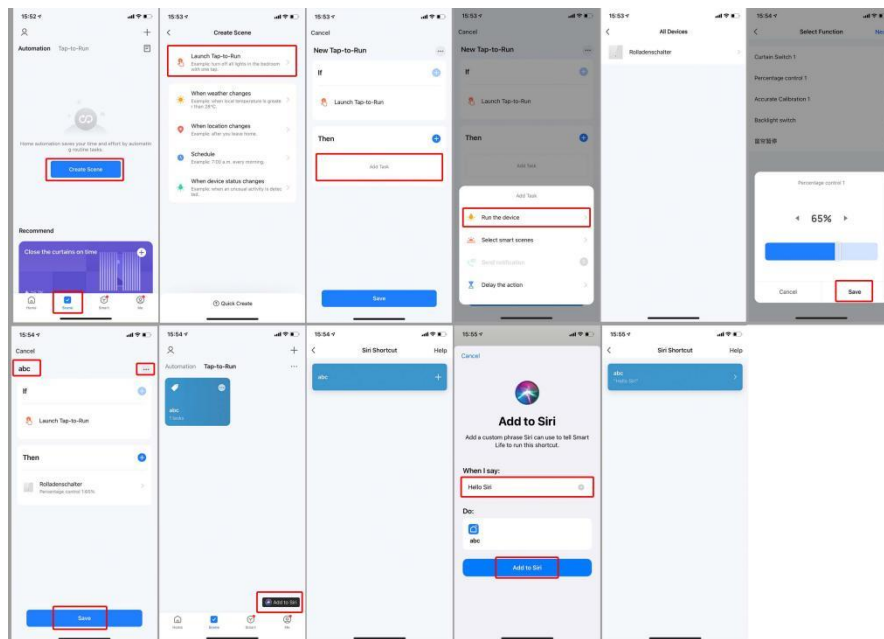


② Verknüpfungs-Widget zum Mobiltelefon hinzufügen

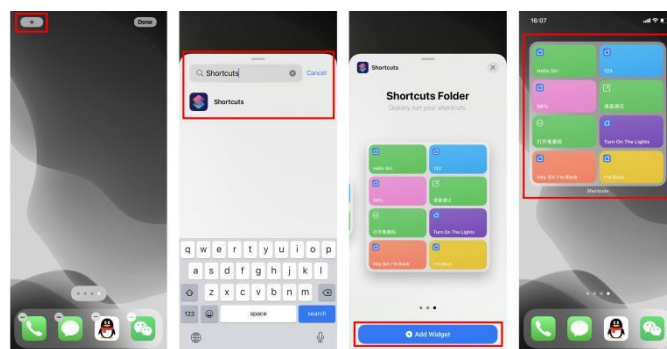

Durch das Video können Sie detailliertere Bedienungsschritte sehen.

(3) Timer-Function

The operation method is shown in the figure:

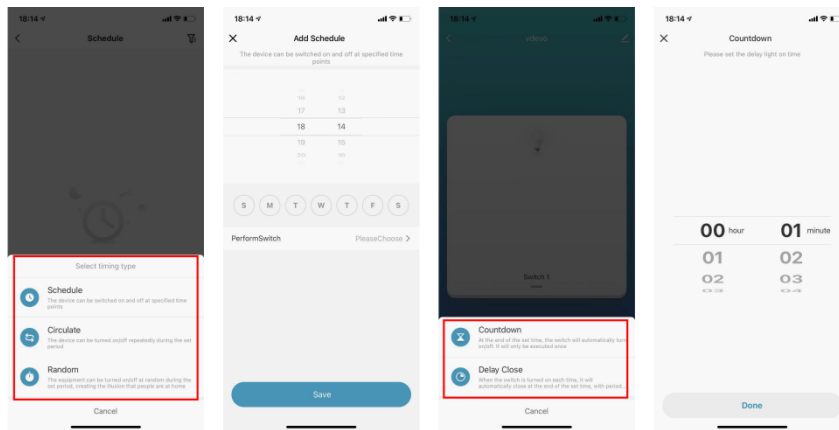

(4) Group Control

- ① Enter the switch control interface, click '✎' in the upper right corner;
- ② Click "Create Group" and select the device to create a group;
- ③ Click "Save" - name the group and "Save" again;
- ④ Done, you can see the newly added group on the main interface of all devices.



(5) Background Light Control

- ① Factory default mode: When the light is on, the backlight is off; when the light is off, the backlight is slightly on.
- ② It can also be set in the movilite APP:
 - a. Indication switch: The status of the indicator light communicates the on/off of the light.
 - b. Indication position (default mode): Lights up when the light is off, and indicates the position of the switch at night.
 - c. Turn off the backlight

(6) Multi-way control (software implementation)

Here is the way to show you how to realize 2 switches to control one light at the same time.

- ① One of the switches is connected to the circuit of the bulb, and the other switch only needs to be connected to the neutral wire.
- ② In the device operation interface, click " " in the upper right corner and find "Multi-Control Association".
- ③ Select the device you want to associate and click "Save".

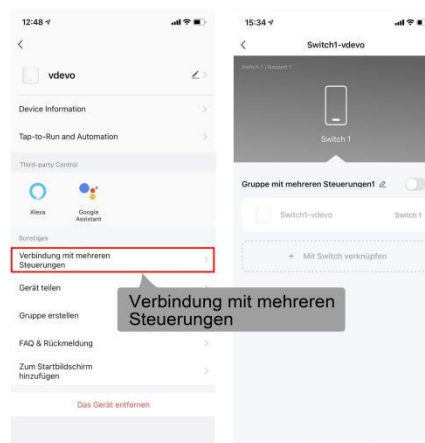

6. After Sales

(1) How to give feedback

Wenn Sie immer noch Probleme mit der Verwendung des Produkts haben, nachdem Sie die Anweisungen und Videos befolgt haben,

bereiten Sie bitte die folgenden Materialien vor

- ① Videos, bei denen das Produkt nicht verwendet werden kann
- ② Bestellnummer von Amazon
- ③ Weisen Sie auf das Problem hin, das nicht verwendet werden kann

Senden Sie einfach Fragen an den technischen Support [<support@currysмарter.de>](mailto:support@currysмарter.de)

Technischer Support: support@currysмарter.de

(2) So verlängern Sie die Garantiezeit

Amazon bietet generell nur eine 7-30 Tage Garantie. Wir haben einen erweiterten Produktgarantieplan und ein kleines Geschenk für Sie vorbereitet, geben Sie den Link [→bit.ly/curry-vip-club←](https://bit.ly/curry-vip-club) ein oder scannen Sie den QR-Code, um das Geschenk zu erhalten und die 60-tägige Garantie und den lebenslangen technischen Support zu verlängern.



7. FAQ

(1) Was soll ich tun, wenn die WLAN-Verbindung des Switch getrennt wird?

- ① Überprüfen und bestätigen Sie, dass der WLAN-Signalebereich 0 bis -180 beträgt (je näher an 0, desto stärker der Signalwert).
- ② Prüfen Sie, ob Ihr WLAN-Router überlastet ist.

(2) Wie überprüfe ich die virtuelle Geräte-ID und die WLAN-Signalstärke?

Klicken Sie auf "" -- "Information des Geräts" in der oberen rechten Ecke der Benutzeroberfläche, um die virtuelle ID und die Signalstärke anzuzeigen.

(3) Was soll ich tun, wenn die Tasten auf dem Bedienfeld nicht reagieren?

- ① Nehmen Sie die obere Platine mit einem Schraubenzieher ab, stecken Sie sie wieder auf und starten Sie das WLAN-Modul neu.
- ② Wenn es immer noch nicht funktioniert, schalten Sie es bitte aus und wieder ein.

8. Laden Sie Handbücher in anderen Sprachen herunter

- ① Scannen Sie den QR-Code, um die französische/italienische/spanische Broschüre herunterzuladen



- ② Oder folgen Sie diesem Link zum Herunterladen: bit.ly/w02support