SixteeN

RETROCONSOLE SYSTEM

CONSOLE MANUAL

instructions — read before powering on

a personal, non-commercial project

START HERE

SixteeN is a whole 16-bit console drawn on screen: the tube TV, the panel with the cartridge slot and real switches. Everything works with a mouse or a controller — the keyboard is only needed to write notes.

1 Open the app

the first time, it creates the console's folder — on macOS, ~/Documents/SNES SixteeN; on Windows and Linux, next to the executable.

2 Get the core

without the snes9x core, the TV shows the setup screen with a button to download it (and another for nointro.dat, optional).

3 Add your ROMs

.sfc/.smc (or .zip) files in the roms/ folder. Each one becomes a box on the game shelf.

4 Turn the TV on

with the TV's POWER button. Once it's on, click "Game shelf", pick a game and switch the console on with the panel's POWER.

The console's folders

- **roms/** your games
- **core/** the snes9x core (downloaded by the app)
- **assets/** covers, logos, cartridges, back covers and manuals
- **saves/** game saves and savestates
- **notes/** notes and screenshots
- **config/** sixteen.cfg, nointro.dat and the catalog

THE HOME SCREEN



the TV off the air on channel 3, with the panel beside it

The console's home: the app opens here, and you come back here when you eject a cartridge.

On the panel

- **Game shelf** — opens the shelf to pick a game (the TV must be on).
- **Console manual** — opens this manual on the tube. Use < page and page > to flip through, and back to close it.
- **Settings** — language, video, controls, core and achievements.

On the TV

- **POWER** — turns the tube on and off, with the CRT warm-up and collapse.
- **VOL- / VOL+** — game sound volume, with the on-screen bars.
- **CH** — switches between channel 3 (the console's) and 4.




boxes standing on the shelf, and the focused game on the panel

- **Pick** click a box or move with the d-pad; confirming inserts the cartridge into the panel's slot.
- **Search** search filters the shelf by game name.
- **Favorites** Add favorite puts the game in the favorites strip, above the shelf.
- **Recent** recently played games and the history, with play time.

The game panel

- **information** the game's year, publisher and rating.
- **back cover** the back cover — click to zoom in on the tube.
- **manual** the game's PDF manual, opened on the tube.
- **cartridge** the cartridge art, zoomed in.
- **Achievements** the RetroAchievements list, when the game has achievements.

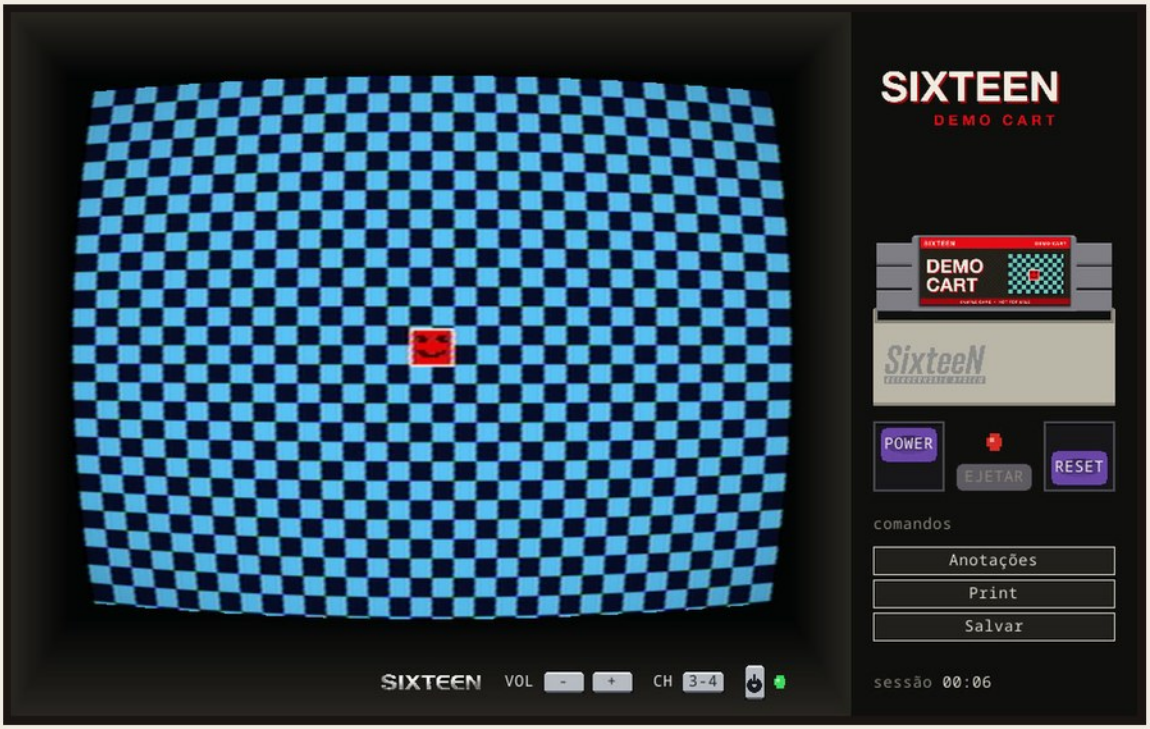

the cartridge seated in the slot, and the console's switches

Just like the real hardware, the cartridge slides into the slot and the console only turns on when you flip POWER.

- **POWER** turns the console on and off. Turn it back on and the game resumes where it left off.
- **RESET** restarts the game, like the console's button.
- **EJECT** releases the cartridge — only with the console off — and goes back to the home screen.
- **session** the panel's footer counts play time, only while the console is on.

Game saves go to the saves/ folder. Savestates live in the Save and Load dialogs, with their own slots for each game.

CONTROLS

A USB or Bluetooth controller works as soon as it's connected. The keyboard plays too. Both can be remapped in Settings → controls.

SNES button	keyboard	controller
D-pad	arrows	d-pad
B	Z	bottom button
A	X	right button
Y	A	left button
X	S	top button
L / R	Q / W	shoulders
START	Enter	start
SELECT	Right Shift	back / select

In menus

- **Confirm** — A on the controller, Enter on the keyboard — or a click.
- **Back** — B on the controller, Esc on the keyboard. On the home screen, Back quits the app.
- **Navigate** — the d-pad moves around the shelf and lists.

NOTES



the two-page notebook, with the game paused

The notes button pauses the game and opens a two-page notebook, kept per game.

- **Cheats** — hand-picked codes for each game, toggled from a checklist. The active ones show on the panel.
- **Note** — free text — this is where the keyboard comes in.
- **Screenshots** — 15 slots for screenshots. Name and pin the ones you want to keep: a pinned screenshot is never overwritten.
- **Back to the game** — closes the notebook and unpauses.

ART AND MANUALS

The console doesn't scrape anything online: game art comes from your own images. Give the file the same name as the ROM, without the extension.

Super Game (USA).sfc → assets/cover/Super Game (USA).png

- **assets/cover/** — the box cover, on the shelf (2D, or a 3D box with a transparent background).
- **assets/logo/** — the game's logo, at the top of the panel.
- **assets/cartridge/** — the cartridge that slides into the slot.
- **assets/backcover/** — the back cover, zoomable on the tube.
- **assets/manual/** — the PDF manual (Super Game (USA).pdf).

Good to know

- **Examples** — each folder comes with an example.* in the right size and shape — use it as a template.
- **Manuals** — the tube's reader shows scanned or image-based PDFs, like this one. Text-only PDFs show up as page not available.
- **Names** — ROMs with non-standard names can be renamed to No-Intro names in settings — saves, notes and art move along.

SETTINGS

Changes apply right away and are saved to config/sixteen.cfg. The screen is split into sections:

game

- **Controls** — the game's control setup.

video

- **Fullscreen** — on by default, at the monitor's native resolution.
- **Static hiss** — the static's sound with the TV off the air.
- **Shelf** — wooden bookcase or metal rental-store rack.

system

- **Updates** — checks for new versions on launch.
- **Language** — English or Portuguese.
- **Core** — downloads or updates snes9x.
- **No-Intro** — renames ROMs to their No-Intro names.

achievements

- **Account** — RetroAchievements username, password and web API key. With the account connected, the TV's chin shows RA ENABLED.

controls

- **Remap** — click an action and press the new key or button; Esc cancels.

NEED HELP?

The shelf won't open

the shelf lives on the tube: turn the TV on with its POWER button. Without the snes9x core installed, the shelf and settings are locked — download the core with the panel's button.

A game doesn't show up

check that the ROM is in roms/ (.sfc, .smc or .zip).

The art doesn't show up

the file name must match the ROM's, without the extension. Super Game.png ↔ Super Game.sfc.

The cartridge won't eject

Eject only works with the console off: switch it off with the panel's POWER first.

The controller doesn't respond

reconnect it and check the mapping in Settings → controls. Generic controllers sometimes swap buttons around.

There's a new version

a green arrow lights up next to the version, on the TV's chin. Click it to see what's new and update.

have fun!