


Uploading sequences into WiFi props


1) export the PRG file from LighTriX Editor:

click on “Export to module” button and following menu appears - click on “Ok”
The Prg Version 3 tick box needs to be selected /automatic/ - this is for all WiFi props

/it needs to be deselected only for 64 and 128 pixel modules without WiFi/

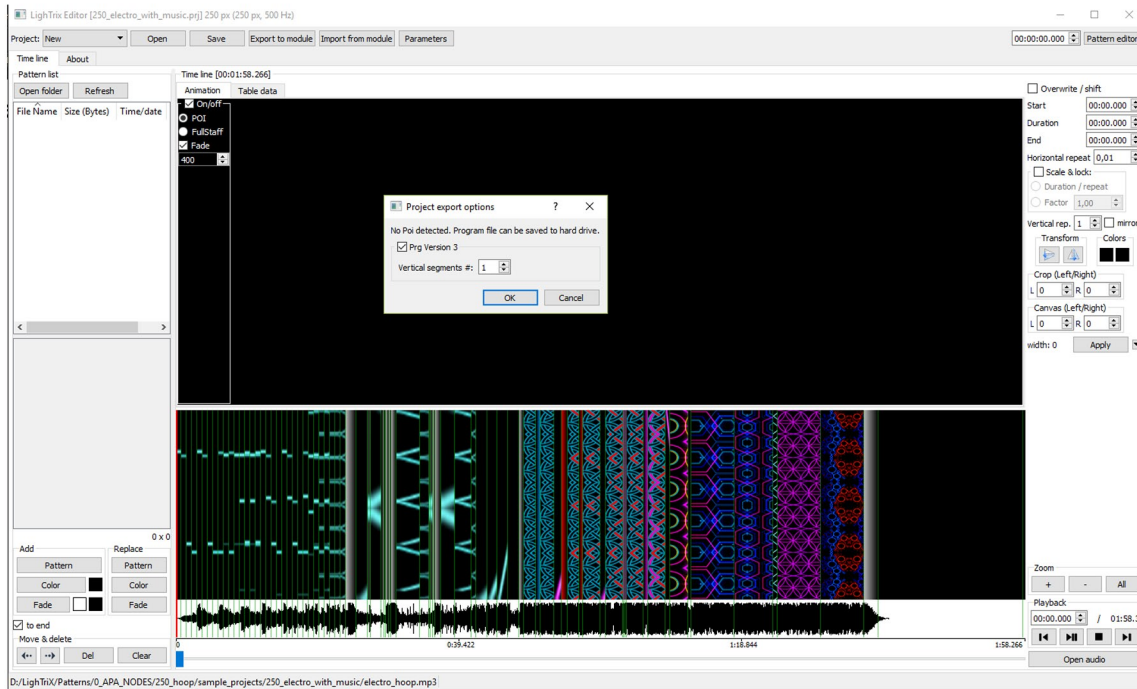


Then save the PRG file to your computer's harddrive

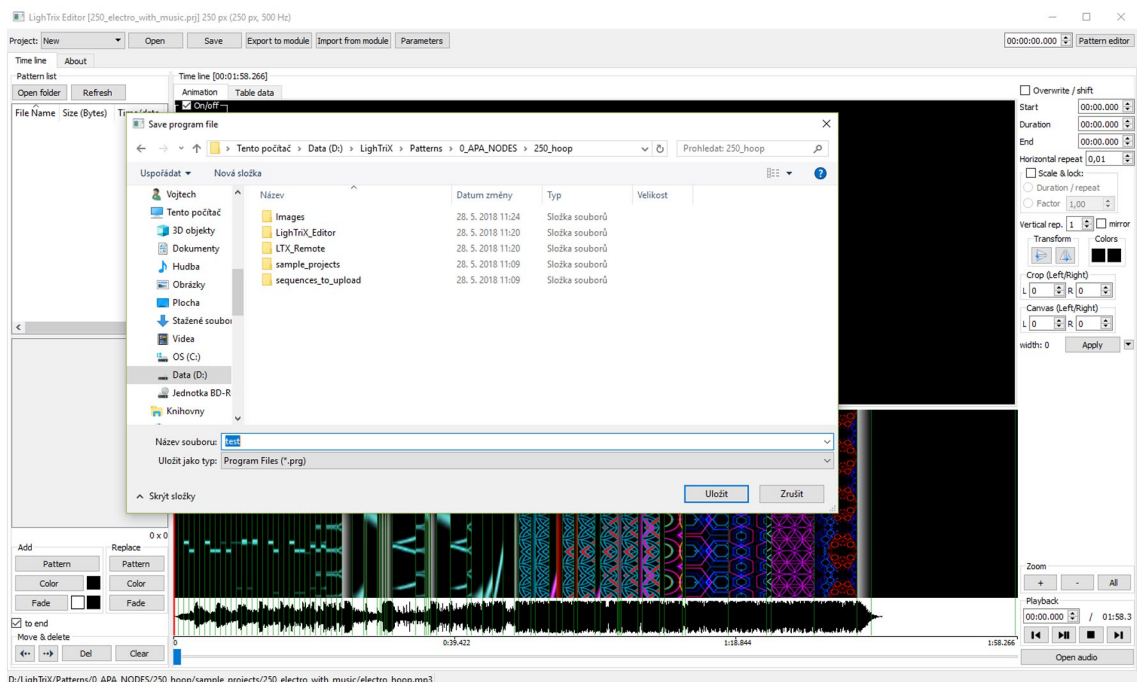

Uploading sequences into WiFi props


2) Run the LTX Remote and upload the sequence

First, you need to turn your WiFi Remote on and wait until the indication LED becomes green. Then you can turn on the prop(s) and wait until it gets connected - becomes green as well.

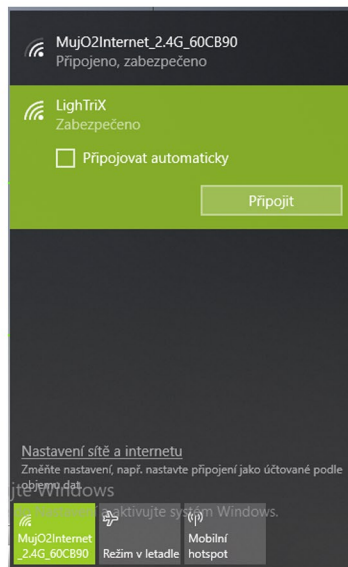

Then, you have to connect your computer /or android device/ to the LighTriX network

The next step is to run the LTX Remote software

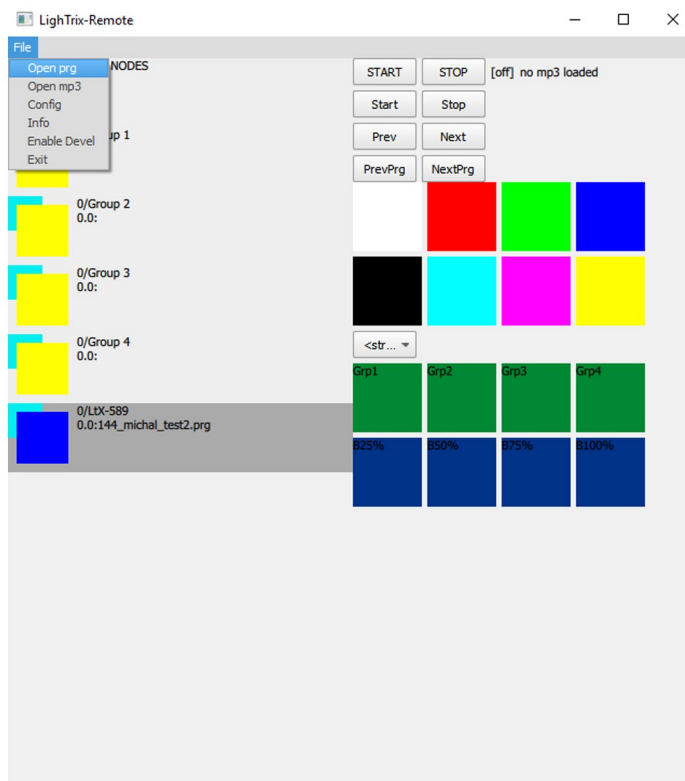


The prop /and the wifi remote if you have it/ will visible as blue square on the left side of the screen

It will show you the name of currently uploaded prg file

To upload a new one, click on the menu /File/ and select “Open prg”

Then locate the prg file you want to upload on your computer and click “Open”

Uploading sequences into WiFi props

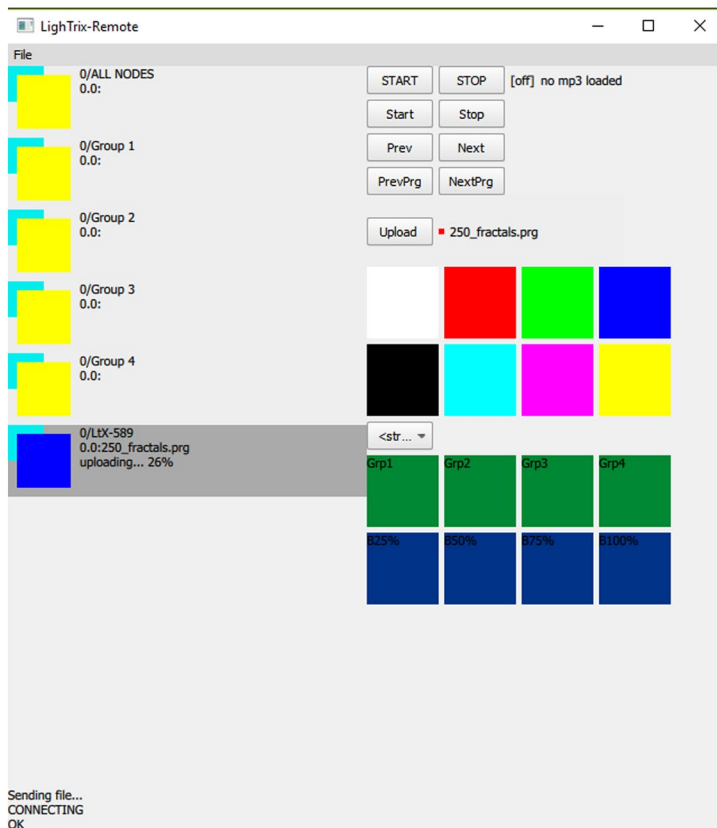

The open prg file will be displayed on the right side of the app.

To upload it, just click on the blue square that represents your prop and the click on the “Upload” button next to prg file name

The prg will start to upload and the prop will show violet running lights.

You will see the progress in on the screen.

Once the upload is done, prop will check the uploaded file and display green color when all si OK.