

**FMUSER FUQ-3904C Receiver Card 4 Tuner Inputs 5 MPTS
UDP-RTP Outputs DVB-S-S2-S2X PID Remapping DiSEqC Support
Broadcast IPTV Integration**




Product overview

The FMUSER FUQ-3904C is a professional receiver card supporting DVB-S/S2/S2X standards, featuring four tuner inputs and five MPTS outputs. It processes satellite signals through multiplexing and PID remapping. Managed via web-based NMS for remote control. Ideal for broadcast integration and satellite reception systems.

Key Features

Includes DiSEqC support for enhanced satellite dish functionality.

Inner Principle Chart (Per Card)

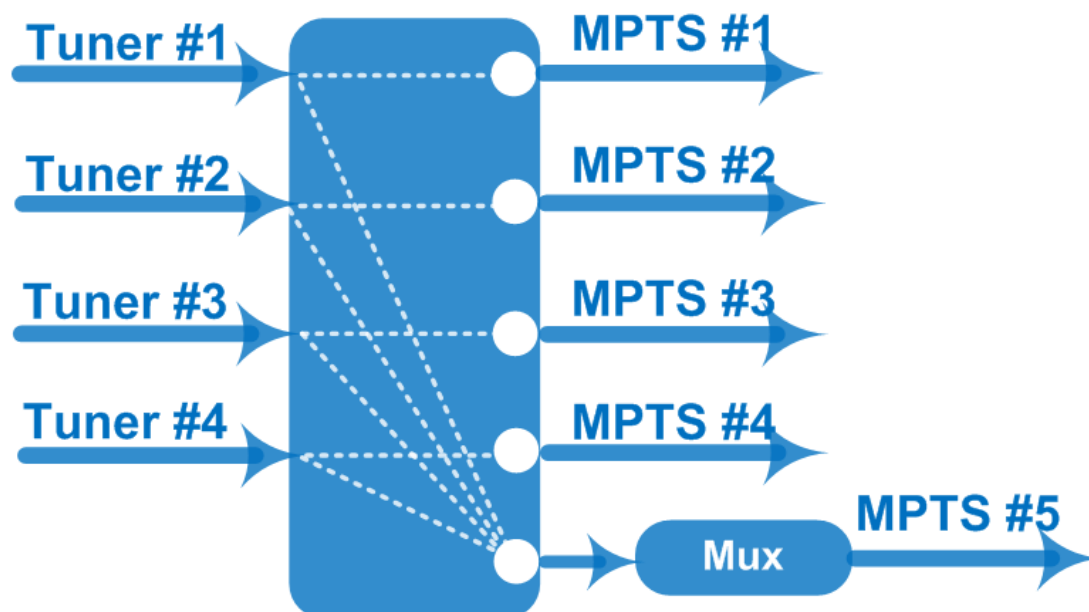

Specifications

Input / Output	4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast	4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast	4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast	4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast
Mux	Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)	Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)	Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)	Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)
Mux	Functions	PID remapping (automatically/ manually)	PID remapping (automatically/ manually)	PID remapping (automatically/ manually)
Mux	Functions	PID pass-through	PID pass-through	PID pass-through
Tuner Section	DVB-S	Input Frequency	Input Frequency	950-2150MHz
Tuner Section	DVB-S	Symbol Rate	Symbol Rate	0.5~45 Msps
Tuner Section	DVB-S	Constellation	Constellation	QPSK
Tuner Section	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	DVB-S2	Input Frequency	Input Frequency	950-2150MHz
Tuner Section	DVB-S2	Symbol Rate	Symbol Rate	QPSK/8PSK/16APSK: 0.5~45 Msps 32APSK: 0.5~40 Msps
Tuner Section	DVB-S2	Constellation	Constellation	QPSK/8PSK/16APSK/32APSK

Tuner Section	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9
Tuner Section	DVB-S2	Max input bitrate per tuner	Max input bitrate per tuner	≤170 Mbps
Tuner Section	DVB-S2X	Symbol Rate	Symbol Rate	QPSK/8PSK/16APSK: 0.5~45 Msps; 8APSK/32APSK: 0.5~40 Msps
Tuner Section	DVB-S2X	Constellation	Constellation	QPSK/8PSK/16APSK/8APSK/32APSK
Tuner Section	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	DVB-S2X	Max input bitrate per tuner	Max input bitrate per tuner	≤170 Mbps
Tuner Section	Signal Strength	-65 ~ -25dBm	-65 ~ -25dBm	-65 ~ -25dBm

System	Web managem nt:100M NMS port	Web managem nt:100M NMS port	Web managem nt:100M NMS port	Web managem nt:100M NMS port
System	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	482mm×328mm ×44mm (W×L×H)	482mm×328mm ×44mm (W×L×H)
General	Weight	Weight	3.5kg	3.5kg
General	Temperature	Temperature	0~45■(operation , -20~80■(stora ge)	0~45■(operation , -20~80■(stora ge)
General	Power supply	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz
General	Consumption	Consumption	≤40W	≤40W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)