

FMUSER FUQ-4313B Dual Channel Audio Encoder Analog Balanced XLR AES-EBU Input ASI IP UDP-RTP Output MPEG1 Layer 2 AAC Encoding for Broadcast Workflows

Product overview




The FMUSER FUQ-4313B is a dual-channel audio encoder supporting analog balanced audio and AES/EBU digital audio inputs via XLR interfaces, with outputs for ASI multiplexing and IP/UDP/RTP. It encodes audio signals using MPEG1 Layer 2 and AAC formats. Control is available via LCD/keyboard or Web GUI, featuring hot-pluggable dual/single PSU options. Ideal for digital broadcasting and robust broadcast workflows.

Key feature

Enables flexible control via LCD/keyboard or Web GUI, with hot-pluggable dual/single PSU options.* MPEG1 Layer 2 and AAC encoding

Principle Chart

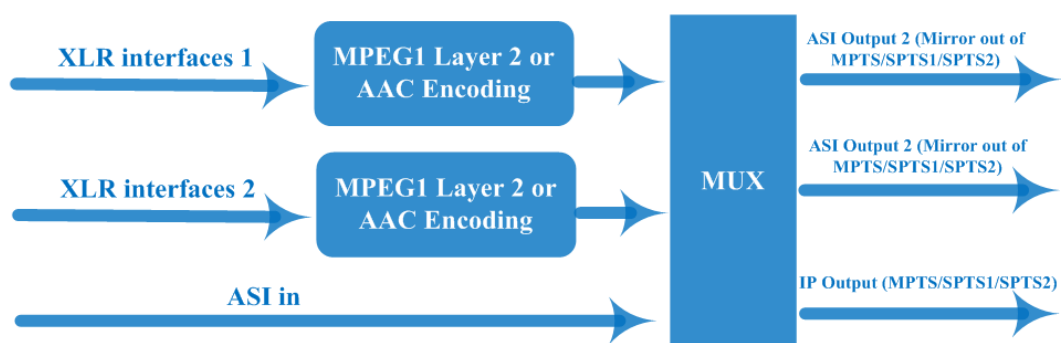

Specifications

Input	Analog balanced audio, XLR interfaces	Analog balanced audio, XLR interfaces
Input	AES / EBU digital audio, XLR interface	AES / EBU digital audio, XLR interface

Input	1*ASI input, BNC interface	1*ASI input, BNC interface
Encoding	Encoding	MPEG1 Layer 2, AAC
Encoding	Sample rate	48KHz
Encoding	Sample accuracy	16bit
Encoding	Bit-rate	64/96/128/192/256/320/384kps
Encoding	Sound Track	left, right, stereo (AAC is only for stereo)
Multiplexing	Maximum PID Number	64
Output	2 independent ASI outputs, BNC interface (Mirror out of MPTS/SPTS1/SPTS2)	2 independent ASI outputs, BNC interface (Mirror out of MPTS/SPTS1/SPTS2)
Output	IP output over UDP/RTP protocol, 100M/1000M Self-adaptive rj45 interface (unicast / multicast)	IP output over UDP/RTP protocol, 100M/1000M Self-adaptive rj45 interface (unicast / multicast)
System function	LCD/keyboard, Web GUI management Chinese and English language	LCD/keyboard, Web GUI management Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions (W×D×H)	482mm×350mm×44mm
General	Temperature range	0~45■(operation), -20~80■(storage)
General	Power Requirements	AC 110V±10%,50/60Hz AC 220V±10%,50/60Hz
General	Power Consumption	<15W
General	Weight	About 3.2kg

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)