

FMUSER FUQ-4339R HDMI Encoder 8-16-24 HDMI Inputs 1 MPTS 8 SPTS Outputs MPEG4 AVC-H264 IP ASI Interfaces Cable TV Headend Broadcasting Product Overview



The FUQ-4339R Encoder is a professional HD/SD audio and video encoding device with scalable 8/16/24 HDMI inputs and outputs including 1 MPTS and 8 SPTS per module. It processes signals using MPEG4 AVC/H.264 video encoding and MPEG1 Layer II, LC-AAC, HE-AAC audio formats. Controlled via web management, it supports features like QR code and caption insertion. Ideal for cable TV head-ends and broadcasting systems.

Key feature

Supports scalable 8/16/24 HDMI inputs with 1 MPTS and 8 SPTS outputs per module.


Features H.264 video encoding and MPEG audio formats including LC-AAC and HE-AAC.

Provides IP output over UDP/RTP/RTSP and optional ASI output.

Includes web management for control with QR code and caption insertion support.

Supports Null Packet Filter for stream optimization.

Principle Chart (Each Encoder Module)

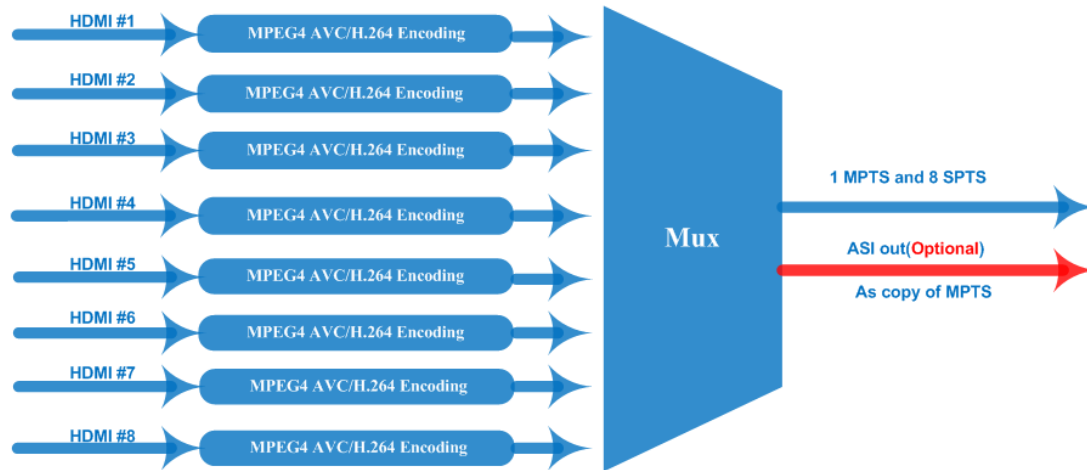

Technical specification

Input	8/16/24 HDMI inputs	8/16/24 HDMI inputs	8/16/24 HDMI inputs	8/16/24 HDMI inputs
Video	Resolution	input	input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720 x 576_50i,720 x 480_60i
Video	Resolution	Output	Output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720 x 576_25P, 720 x 480_30P
Video	Encoding	Encoding	Encoding	MPEG-4 AVC/H.264
Video	Bit-rate	Bit-rate	Bit-rate	1~13Mbps each channel
Video	Rate Control	Rate Control	Rate Control	CBR/VBR
Video	GOP Structure	GOP Structure	GOP Structure	IP...P (P Frame adjustment, without B Frame)

Audio	Encoding	Encoding	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through
Audio	Sampling rate	Sampling rate	Sampling rate	48KHz
Audio	Resolution	Resolution	Resolution	24-bit
Audio	Audio Gain	Audio Gain	Audio Gain	0-255 Adjustable
Audio	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
	LC-AAC Bit-rate	LC-AAC Bit-rate	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
	HE-AAC Bit-rate	HE-AAC Bit-rate	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps
Stream output	IP output through DATA (GE) over UDP and RTP/RTSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder board) 1 ASI out as mirror of MPTS (Optional as order)	IP output through DATA (GE) over UDP and RTP/RTSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder board) 1 ASI out as mirror of MPTS (Optional as order)	IP output through DATA (GE) over UDP and RTP/RTSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder board) 1 ASI out as mirror of MPTS (Optional as order)	IP output through DATA (GE) over UDP and RTP/RTSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder board) 1 ASI out as mirror of MPTS (Optional as order)
System function	Network management(WEB)	Network management(WEB)	Network management(WEB)	Network management(WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension (W×L×H)	Dimension (W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm

Miscellaneous	Environment	Environment	0~45■(work)■-2 0~80■■■Storage ■	0~45■(work)■-2 0~80■■■Storage ■
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

Order Information

	FU-4339S-8	FU-4339S-16	FU-4339S-24
8 HDMI Inputs with 8 SPTS and 1 MPTS out (1 encoder board+1NMS port+1 DATA Port)	X		
16 HDMI Inputs with 16 SPTS or 2 MPTS out (2 encoder boards+2 NMS ports+2 DATA Ports)		X	
24 HDMI Inputs with 24 SPTS or 3 MPTS out((3 encoder boards+3 NMS ports+ 3 DATA Ports))			X

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)