

FMUSER FUQ-4349 8-Channel Audio Encoder 8 Unbalanced Stereo BNC Inputs ASI-IP Outputs MPEG1 Layer 2 Compression Adjustable Gain Control Professional Broadcasting

Product Overview



The FMUSER FUQ-4349 is a professional 8-channel audio encoder featuring MPEG1 Layer 2 compression. It processes audio signals with adjustable gain control and outputs via ASI and IP ports. The device supports web-based operation for easy management. Ideal for broadcast studios and IP streaming systems.

Key feature

Features 8 unbalanced stereo audio inputs for flexible connectivity.


Supports MPEG1 Layer 2 encoding for high-quality compression.

Includes adjustable audio gain control for signal optimization.

Provides dual ASI mirrored outputs for redundancy.

Offers IP output with MPTS and 8 SPTS over UDP for versatile streaming.

Principle Chart

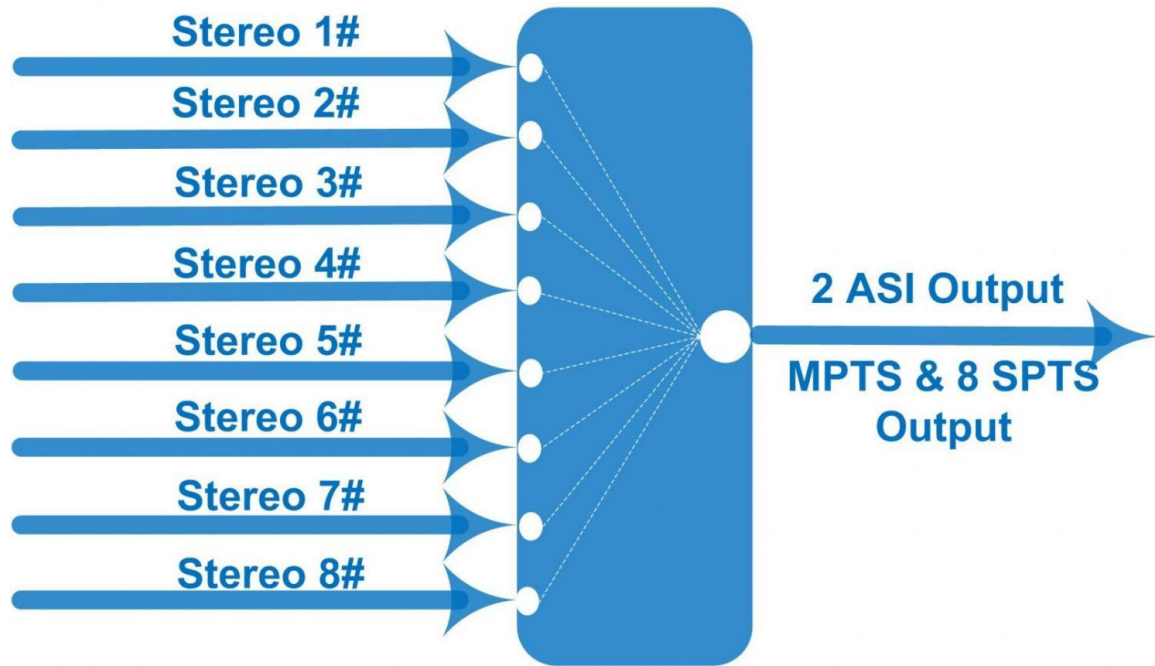

Specifications

Audio Encode	Interface	8 pairs of unbalanced stereo audio inputs, BNC interface
Audio Encode	Encoding Format	MPEG1 Layer 2
Audio Encode	Audio Gain	0~255
Audio Encode	Sampling Rate	48KHz
Audio Encode	Bit-rate	32/48/56/64/80/96/112/128/160/192/224/256/320/384Kb/s (each channel)---for stereo audio 32/48/56/64/80/96/112/128/160Kb/s (each channel)---for Left/Right audio
Stream output	2*ASI mirrored output, BNC interface	2*ASI mirrored output, BNC interface
Stream output	MPTS & 8 SPTS over UDP, 1000M Base-T Ethernet interface (unicast/multicast)	MPTS & 8 SPTS over UDP, 1000M Base-T Ethernet interface (unicast/multicast)
System	LCD/keyboard operating, web-based NMS manage	LCD/keyboard operating, web-based NMS manage
System	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade

Miscellaneous	Dimension	482mm×455mm×44mm (W×L× H)
Miscellaneous	Approx weight	4kg
Miscellaneous	Temperature	0~45■ (work), -20~80■■■Storage■
Miscellaneous	Power	AC 100V-220V±10%, 50/60Hz
Miscellaneous	Consumption	25W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227