

**FMUSER FUQ-4696 CI Receiver 2-4 Tuner Inputs DVB-C-T-ISDB-T  
DVB-S-S2-S2X ATSC ASI-IP Output Multi-Standard Demodulation  
Descrambling Re-muxing for Broadcast Headends** Each Demodulation

Module = 2 or 4 \*RF/Loop out + 2\*CAM + 2\*Smartcard



#### Product Overview

The FMUSER FUQ-4696 CI Receiver integrates demodulation and descrambling in a 1U chassis, supporting 2 or 4 tuner inputs and outputs via ASI or IP. It converts RF signals to TS output after re-mux, with CAM/CI decryption and web NMS management. Designed for broadcast systems, cable headends, and IPTV distribution.

#### Key feature

Supports 2 or 4 tuner inputs with switchable DVB-C/T/ISDB-T or optional DVB-S/S2/S2X/ATSC.


Features 1 ASI & 16 IP inputs for re-mux with UDP/RTP and BISS descrambling.

Includes CAM/CI slots for decrypting programs from RF, ASI, or IP without external power.

Provides output flexibility: 1 MPTS via ASI/IP and 16 SPTS over IP (UDP/RTP).

Offers web NMS management with remote control, firmware updates, and 256 PID mapping.

#### Principle Chart (each demodulation module)

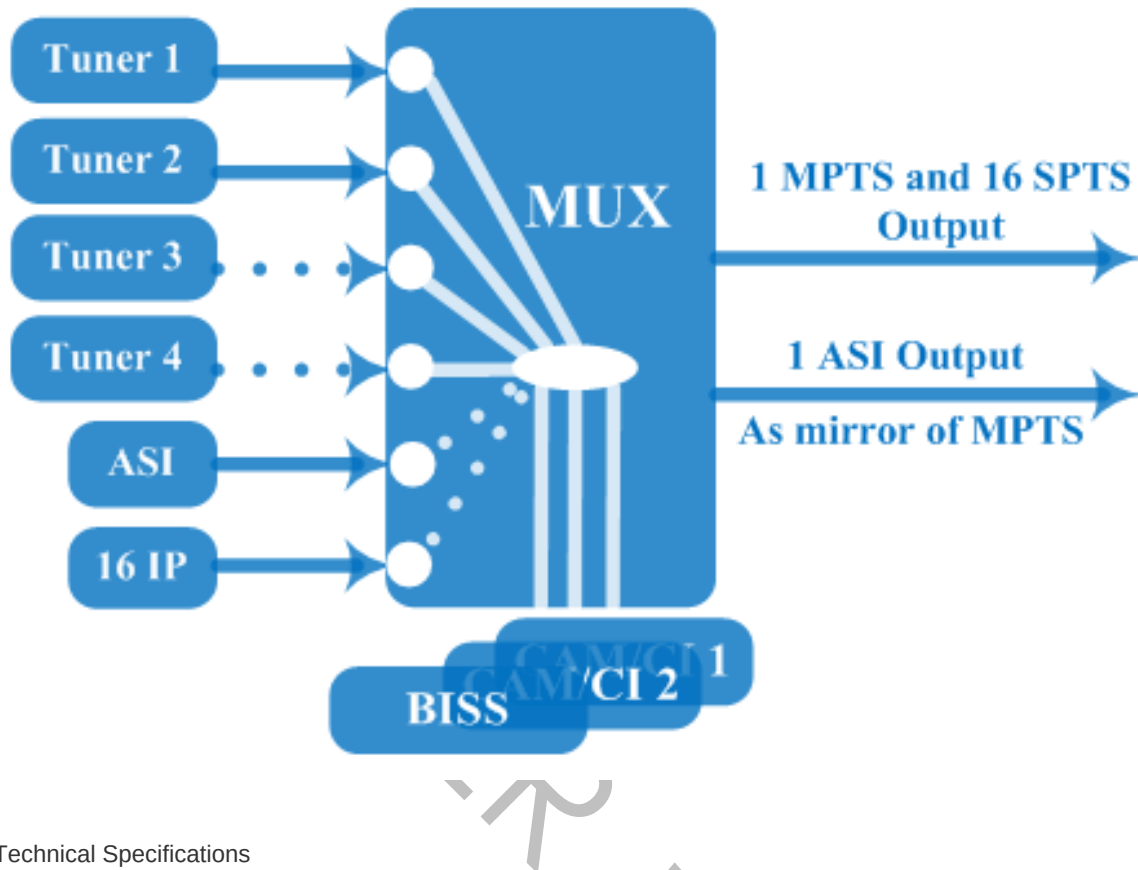

#### Technical Specifications

|                                |                                                                                                                                                                       |                                                                                                                                                                       |                                                                                                                                                                       |                                                                                                                                                                       |                                                                                                                                                                       |                                                                                                                                                                       |                                                                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input(per demodulation module) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) | 2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux ( UDP/RTP ) |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|               |                                    |        |                   |                   |                   |                         |                         |
|---------------|------------------------------------|--------|-------------------|-------------------|-------------------|-------------------------|-------------------------|
| Tuner Section | Multi-mode tuners switchable (New) | DVB-C  | Input Frequency   | Input Frequency   | Input Frequency   | 60 ~890 MHz             | 60 ~890 MHz             |
| Tuner Section | Multi-mode tuners switchable (New) | DVB-C  | Standard          | Standard          | Standard          | J.83A, J.83C            | J.83B                   |
| Tuner Section | Multi-mode tuners switchable (New) | DVB-C  | Constellation     | Constellation     | Constellation     | 16/32/64/128/256 QAM    | 64/256 QAM              |
| Tuner Section | Multi-mode tuners switchable (New) | DVB-T  | Input Frequency   | Input Frequency   | Input Frequency   | 60 ~890 MHz             | 60 ~890 MHz             |
| Tuner Section | Multi-mode tuners switchable (New) | DVB-T  | Bandwidth         | Bandwidth         | Bandwidth         | 6/7/8 M                 | 6/7/8 M                 |
| Tuner Section | Multi-mode tuners switchable (New) | ISDB-T | Input Frequency   | Input Frequency   | Input Frequency   | 60 ~890 MHz             | 60 ~890 MHz             |
| Tuner Section | Satellite                          | DVB-S  | Input Frequency   | Input Frequency   | Input Frequency   | 950~2150MHz             | 950~2150MHz             |
| Tuner Section | Satellite                          | DVB-S  | Symbol rate       | Symbol rate       | Symbol rate       | 0.5~45Mps               | 0.5~45Mps               |
| Tuner Section | Satellite                          | DVB-S  | Signal Strength   | Signal Strength   | Signal Strength   | - 65- -25dBm            | - 65- -25dBm            |
| Tuner Section | Satellite                          | DVB-S  | FEC               | FEC               | FEC               | 1/2, 2/3, 3/4, 5/6, 7/8 | 1/2, 2/3, 3/4, 5/6, 7/8 |
| Tuner Section | Satellite                          | DVB-S  | Constellation     | Constellation     | Constellation     | QPSK                    | QPSK                    |
| Tuner Section | Satellite                          | DVB-S  | Max input bitrate | Max input bitrate | Max input bitrate | ≤170 Mbps               | ≤170 Mbps               |
| Tuner Section | Satellite                          | DVB-S2 | Input Frequency   | Input Frequency   | Input Frequency   | 950~2150MHz             | 950~2150MHz             |

|               |           |         |                   |                   |                   |                                                                                                                                                                               |                                                                                                                                                                               |
|---------------|-----------|---------|-------------------|-------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tuner Section | Satellite | DVB-S2  | Symbol rate       | Symbol rate       | Symbol rate       | QPSK/8PSK /16APSK :0.5~45 Msps<br>32APSK: 0.5~40Msps;                                                                                                                         | QPSK/8PSK /16APSK :0.5~45 Msps<br>32APSK: 0.5~40Msps;                                                                                                                         |
| Tuner Section | Satellite | DVB-S2  | FEC               | FEC               | FEC               | QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10<br><br>8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10<br><br>16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10<br><br>32APSK: 3/4, 4/5, 5/6, 8/9, 9/10 | QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10<br><br>8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10<br><br>16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10<br><br>32APSK: 3/4, 4/5, 5/6, 8/9, 9/10 |
| Tuner Section | Satellite | DVB-S2  | Constellation     | Constellation     | Constellation     | QPSK, 8PSK, 16APSK, 32APSK                                                                                                                                                    | QPSK, 8PSK, 16APSK, 32APSK                                                                                                                                                    |
| Tuner Section | Satellite | DVB-S2  | Max input bitrate | Max input bitrate | Max input bitrate | ≤170 Mbps                                                                                                                                                                     | ≤170 Mbps                                                                                                                                                                     |
| Tuner Section | Satellite | DVB-S2X | Input Frequency   | Input Frequency   | Input Frequency   | 950~2150MHz                                                                                                                                                                   | 950~2150MHz                                                                                                                                                                   |

| Tuner<br>Section | Satellite | DVB-S2X | Symbol<br>rate | Symbol<br>rate | Symbol<br>rate | QPSK/8P<br>SK<br>/16APSK<br>:0.5~45<br>Mps<br>8APSK: 0<br>.5~40Msp<br>s<br>32APSK:<br>0.5~40Ms<br>ps | QPSK/8P<br>SK<br>/16APSK<br>:0.5~45<br>Mps<br>8APSK: 0<br>.5~40Msp<br>s<br>32APSK:<br>0.5~40Ms<br>ps |
|------------------|-----------|---------|----------------|----------------|----------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|------------------|-----------|---------|----------------|----------------|----------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|

|               |           |         |                   |                   |                   |                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------|-----------|---------|-------------------|-------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tuner Section | Satellite | DVB-S2X | FEC               | FEC               | FEC               | QPSK:<br>1/2, 3/5,<br>2/3, 3/4,<br>4/5, 5/6,<br>8/9, 9/10,<br>13/45,<br>9/20,<br>11/20<br>8PSK:<br>3/5, 2/3,<br>3/4, 5/6,<br>8/9, 9/10<br>8APSK:<br>5/9-L,<br>26/45-L<br>16APSK:<br>2/3, 3/4,<br>4/5, 5/6,<br>8/9, 9/10,<br>1/2-L,<br>8/15-L,<br>5/9-L,<br>26/45,<br>3/5,<br>3/5-L,<br>28/45,<br>23/36 ,<br>2/3-L,<br>25/36,<br>13/18,<br>7/9, 77/90<br>32APSK:<br>3/4, 4/5,<br>5/6, 8/9,<br>2/3-L,<br>32/45,<br>11/15, 7/9 | QPSK:<br>1/2, 3/5,<br>2/3, 3/4,<br>4/5, 5/6,<br>8/9, 9/10,<br>13/45,<br>9/20,<br>11/20<br>8PSK:<br>3/5, 2/3,<br>3/4, 5/6,<br>8/9, 9/10<br>8APSK:<br>5/9-L,<br>26/45-L<br>16APSK:<br>2/3, 3/4,<br>4/5, 5/6,<br>8/9, 9/10,<br>1/2-L,<br>8/15-L,<br>5/9-L,<br>26/45,<br>3/5,<br>3/5-L,<br>28/45,<br>23/36 ,<br>2/3-L,<br>25/36,<br>13/18,<br>7/9, 77/90<br>32APSK:<br>3/4, 4/5,<br>5/6, 8/9,<br>2/3-L,<br>32/45,<br>11/15, 7/9 |
| Tuner Section | Satellite | DVB-S2X | Constellation     | Constellation     | Constellation     | QPSK,<br>8PSK,<br>8APSK,<br>16APSK,<br>32APSK                                                                                                                                                                                                                                                                                                                                                                               | QPSK,<br>8PSK,<br>8APSK,<br>16APSK,<br>32APSK                                                                                                                                                                                                                                                                                                                                                                               |
| Tuner Section | Satellite | DVB-S2X | Max input bitrate | Max input bitrate | Max input bitrate | ≤170 Mbps                                                                                                                                                                                                                                                                                                                                                                                                                   | ≤170 Mbps                                                                                                                                                                                                                                                                                                                                                                                                                   |
|               | ATSC      | ATSC    | Input Frequency   | Input Frequency   | Input Frequency   | 54-858M Hz                                                                                                                                                                                                                                                                                                                                                                                                                  | 54-858M Hz                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                  |                                  |                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|----------------------------------|----------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                  | ATSC                             | ATSC                                                                                 | Bandwidth                                                                            | Bandwidth                                                                            | Bandwidth                                                                            | 6 M                                                                                  | 6 M                                                                                  |
|                                  | ATSC                             | ATSC                                                                                 | Constellation                                                                        | Constellation                                                                        | Constellation                                                                        | 8 VSB                                                                                | 8 VSB                                                                                |
| Descrambling                     | Descrambling                     | CAM/CI Quantity                                                                      | CAM/CI Quantity                                                                      | CAM/CI Quantity                                                                      | 2 (per demodulation module)                                                          | 2 (per demodulation module)                                                          | 2 (per demodulation module)                                                          |
| Descrambling                     | Descrambling                     | BISS Mode                                                                            | BISS Mode                                                                            | BISS Mode                                                                            | Mode 1, Mode E                                                                       | Mode 1, Mode E                                                                       | Mode 1, Mode E                                                                       |
| Output (per demodulation module) | Output (per demodulation module) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) | 1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast) |
| Output (per demodulation module) | Output (per demodulation module) | 1xASI mirrored out of MPTS, BNC interface                                            | 1xASI mirrored out of MPTS, BNC interface                                            | 1xASI mirrored out of MPTS, BNC interface                                            | 1xASI mirrored out of MPTS, BNC interface                                            | 1xASI mirrored out of MPTS, BNC interface                                            | 1xASI mirrored out of MPTS, BNC interface                                            |
| System                           | System                           | Remote management                                                                    | Remote management                                                                    | Web-server Management                                                                | Web-server Management                                                                | Web-server Management                                                                | Web-server Management                                                                |
| System                           | System                           | Language                                                                             | Language                                                                             | English                                                                              | English                                                                              | English                                                                              | English                                                                              |
| System                           | System                           | Upgrade                                                                              | Upgrade                                                                              | web management                                                                       | web management                                                                       | web management                                                                       | web management                                                                       |
| Miscellaneous                    | Miscellaneous                    | Dimension                                                                            | Dimension                                                                            | 482*300*44mm (W×L×H)                                                                 | 482*300*44mm (W×L×H)                                                                 | 482*300*44mm (W×L×H)                                                                 | 482*300*44mm (W×L×H)                                                                 |
| Miscellaneous                    | Miscellaneous                    | Environment                                                                          | Environment                                                                          | 0~45℃(work)■-20~80℃■Storage■                                                         | 0~45℃(work)■-20~80℃■Storage■                                                         | 0~45℃(work)■-20~80℃■Storage■                                                         | 0~45℃(work)■-20~80℃■Storage■                                                         |

|               |               |                    |                    |                      |                      |                      |                      |
|---------------|---------------|--------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Miscellaneous | Miscellaneous | Power requirements | Power requirements | 100~240 VAC, 50/60Hz | 100~240 VAC, 50/60Hz | 100~240 VAC, 50/60Hz | 100~240 VAC, 50/60Hz |
| Miscellaneous | Miscellaneous | Power consumption  | Power consumption  | 15W                  | 15W                  | 15W                  | 15W                  |

## Order Guide

Please specify both Demodulation module and Tuner Input options when you place order:

|                     |          |                                        |
|---------------------|----------|----------------------------------------|
| Demodulation Module | Option 1 | 1*Demodulation module, 2 CAM/CI Slots  |
| Demodulation Module | Option 2 | 2*Demodulation modules, 4 CAM/CI Slots |

|                                       |          |                                               |
|---------------------------------------|----------|-----------------------------------------------|
| Tuner Input (per demodulation module) | Option 1 | 2*DVB-S/S2/S2X tuner                          |
| Tuner Input (per demodulation module) | Option 2 | 2*DVB-C/T/ISDB-T tuner                        |
| Tuner Input (per demodulation module) | Option 3 | 2*ATSC tuner                                  |
| Tuner Input (per demodulation module) | Option 4 | 4*DVB-S/S2/S2X tuner                          |
| Tuner Input (per demodulation module) | Option 5 | 4*DVB-C/T/ISDB-T tuner                        |
| Tuner Input (per demodulation module) | Option 6 | 4*ATSC tuner                                  |
| Tuner Input (per demodulation module) | Option 7 | 2*DVB-S/S2/S2X tuner + 2*DVB-C/T/ISDB-T tuner |
| Tuner Input (per demodulation module) | Option 8 | 2*DVB-S/S2/S2X tuner + 2*ATSC tuner           |
| Tuner Input (per demodulation module) | Option 9 | 2*DVB-C/T/ISDB-T tuner + 2*ATSC tuner         |

## About Us

---

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■[sales@fmuser.com](mailto:sales@fmuser.com) whatsapp: +8613922702227

FMUSER 广州艾盛