

**FMUSER FUQ-8313 DVB-T Transmitter 1-5/8 RF Output Channel DVB-T Input
COFDM Modulation LDMOS Amplifier AGC MFN-SFN Support Terrestrial TV
Broadcast**



Product overview

The FMUSER FUQ-8313 is a high-power DVB-T transmitter supporting 800W/1000W/1200W outputs via 470–806MHz RF. It processes COFDM-modulated signals with LDMOS amplification, featuring AGC stability and modular chassis design. The 4U rack-mount unit includes Ethernet/RS-485 control and operates at 220V±10%. Ideal for terrestrial TV broadcasting, MFN/SFN deployments, and emergency backup systems.

Key feature


Remote Monitoring: SNMP/Web GUI for power, temperature, and VSWR diagnostics

Technical Specifications

Input	System standard	DVB-(T)
Input	frequency	470MHz~806MHz
Input	Input Level	-20 dBm±3dB (87dbuv ±3dB)
Input	Input reflection loss	≥15dB
Input	Input Interface	‘N’
Output	RF output power	800W/1000W/1200W optional
Output	Output frequency	470MHz~806MHz (For Single Channel: Every 8M available; For Broadband Channel: consecutive 60M available)
Output	Output impedance	50Ω
Output	frequency response	±0.5dB

Output	Shoulder level	$\geq 36\text{dB@central frequency IF} \pm 4.2\text{MHz}$
Output	MER	$\geq 33\text{dB}$
Output	output reflection loss	$\geq 20\text{dB}$
Output	variation of output power	$\pm 0.25\text{dB}$
Output	In-band stray	$\leq -60\text{dBc}$
Output	Out-of-band suppression	$\geq 65\text{dBc}$
Output	Output interface	1-5/8
General Parameters	Working temperature	$-20 \sim +50^{\circ}\text{C}$
General Parameters	Storage temperature	$-30 \sim +75^{\circ}\text{C}$
General Parameters	Relatively humidity	$\leq 95\%$ (25 $^{\circ}\text{C}$ no condensation)
General Parameters	Cooling mode	inside cooling fan
General Parameters	atm press	86~106kPa
General Parameters	power supply	AC, 220V $\pm 10\%$ /50Hz
General Parameters	Machine room requirement	less dust, no shake
General Parameters	Dimension(L×W×H)	850mm×600mm×1695mm

System Diagram

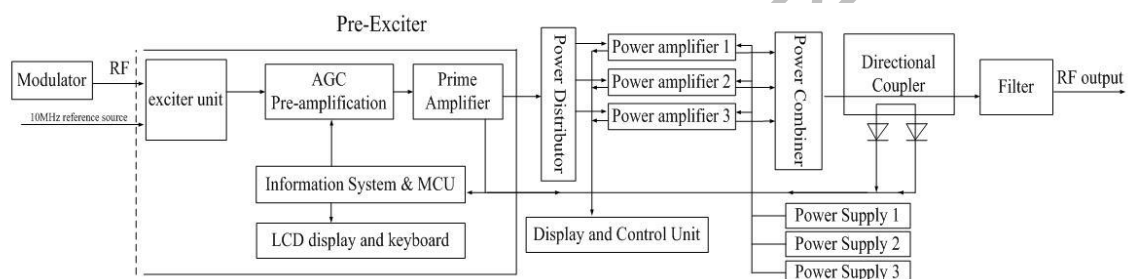

PS: This diagram is a reference for 800W and 1000W transmitter.

For 1200W transmitter, there are 4 power amplifiers and 4 power supplier included.

Main Components List

S/N	Component Name	Component Name	Specs	Qty	Remarks
	Final Power Amplifier	Final Power Amplifier	300W	3 pcs	For 800W

	Final Power Amplifier	Final Power Amplifier	400W	3 pcs	For 1000W
	Final Power Amplifier	Final Power Amplifier	400W	4 pcs	For 1200W
	Pre-Exciter	Pre-Exciter		1 pc	
	Monitor Unit	Monitor Unit		1 pc	With LCD monitor on front door
	Power Supply for Final Amplifier	Power Supply for Final Amplifier		3 pcs	For 800W/1000W
	Power Supply for Final Amplifier	Power Supply for Final Amplifier		4 pcs	For 1200W
	Filter	Filter		1 pc	As per order. (In case multiple single-channel transmitters are involved, a power combiner is required.)
	Cabinet	Cabinet		1 pc	
	Cooling Fan	Cooling Fan		1 set	2 sets (with 1 set for backup) optional as order or needed
Accessories	Accessories	Accessories	Accessories	Accessories	Accessories
		Hard Feeder	Φ40, 2 meter long	1	These parts are standard configuration. If there are special requirement, please indicate when place order.

		Elbow		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
		Hoop		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
		Hose Clamp		13	These parts are standard configuration. If there are special requirement, please indicate when place order.
		Central Pin		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
		Flange	Φ40	1	These parts are standard configuration. If there are special requirement, please indicate when place order.

		antenna		1	As per order
		Feeder			As per order
		Combiner		1	As per order

Order Info

Model Number	Description
DUT-8313(800W-I)	800W Indoor
DUT-8313(1000W-I)	1000W Indoor
DUT-8313(1200W-I)	1200W Indoor

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227