EXPERIMENT 6

NAME: Yuvraj Tripathi **UID: 22BET10140**

Branch: BE – IT **SECTION/GROUP: 22BET_IOT – 703 (B)**

SEMESTER: 6th **SUBJECT CODE: 22ITP – 351**

Problem 1

AIM: Maximum Depth of Binary Tree

CODE:

```
class Solution
{ public:
    int maxDepth(TreeNode* root)
        { if (!root) return 0;

        int leftDepth = maxDepth(root->left);
        int rightDepth = maxDepth(root->right);

        return max(leftDepth, rightDepth) + 1;
    }
};
```

OUTPUT:

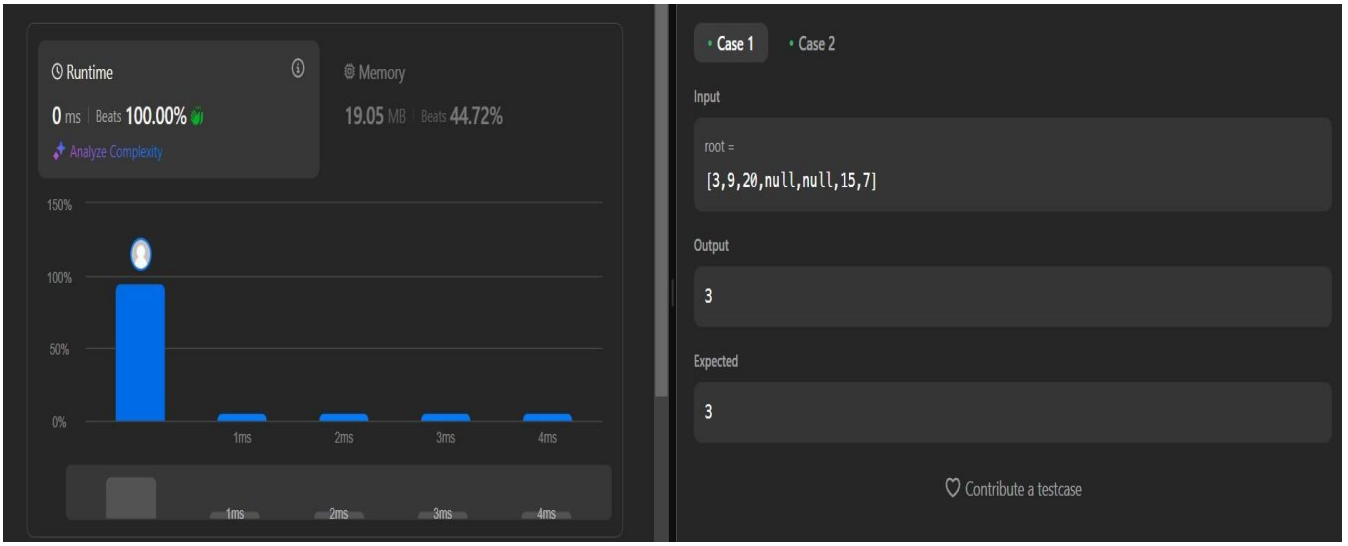

EXPERIMENT 6

Problem 2

AIM: Validate Binary Search Tree

CODE:

```
class Solution
{ public:
    bool isValidBST(TreeNode* root, long long minVal = LLONG_MIN, long long maxVal = LLONG_MAX) {
        if (!root) return true;
        if (root->val <= minVal || root->val >= maxVal) return false;

        return isValidBST(root->left, minVal, root->val) && isValidBST(root->right, root->val, maxVal);
    }
};
```

OUTPUT:

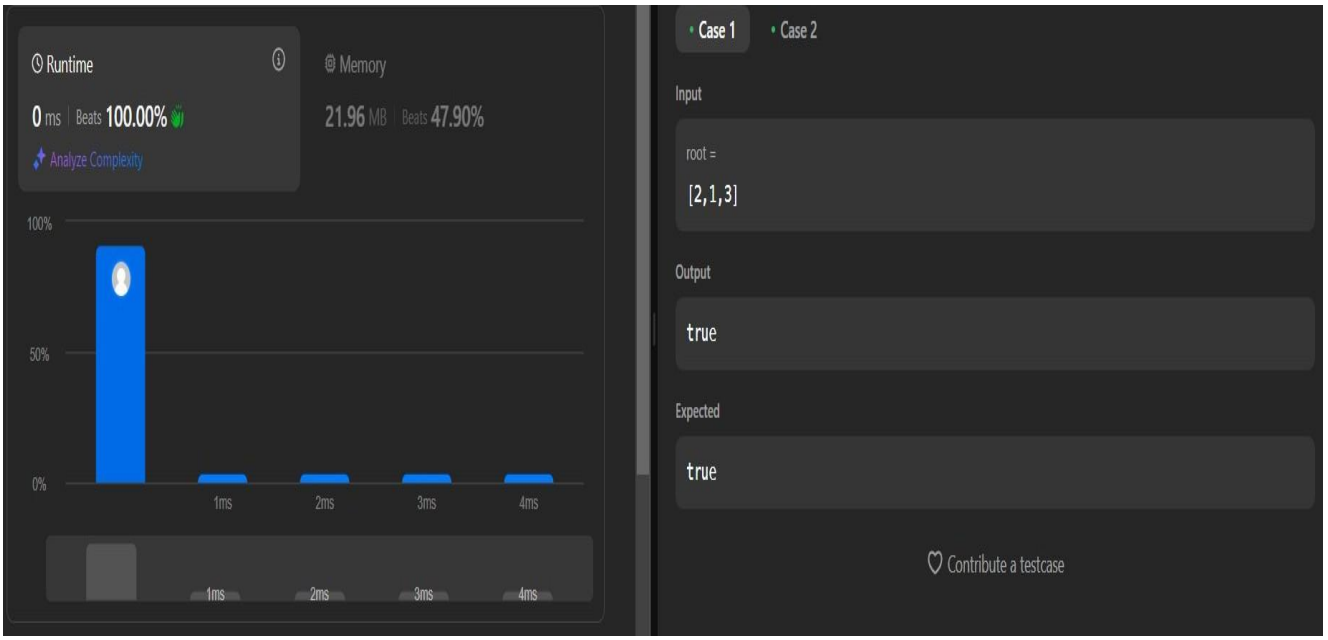

EXPERIMENT 6

Problem 3

AIM: Symmetric Tree

CODE:

```
class Solution
{ public:
    bool isMirrored(TreeNode* root1,TreeNode* root2)
        { if(root1==NULL && root2==NULL)return true;
        else if(root1==NULL || root2==NULL)return false;


        return  (root1->val==root2->val)&&isMirrored(root1->left,root2->right)&&isMirrored(root1->right,root2->left);
    }
    bool isSymmetric(TreeNode* root)
        { return isMirrored(root,root);
    }
};
```

OUTPUT:

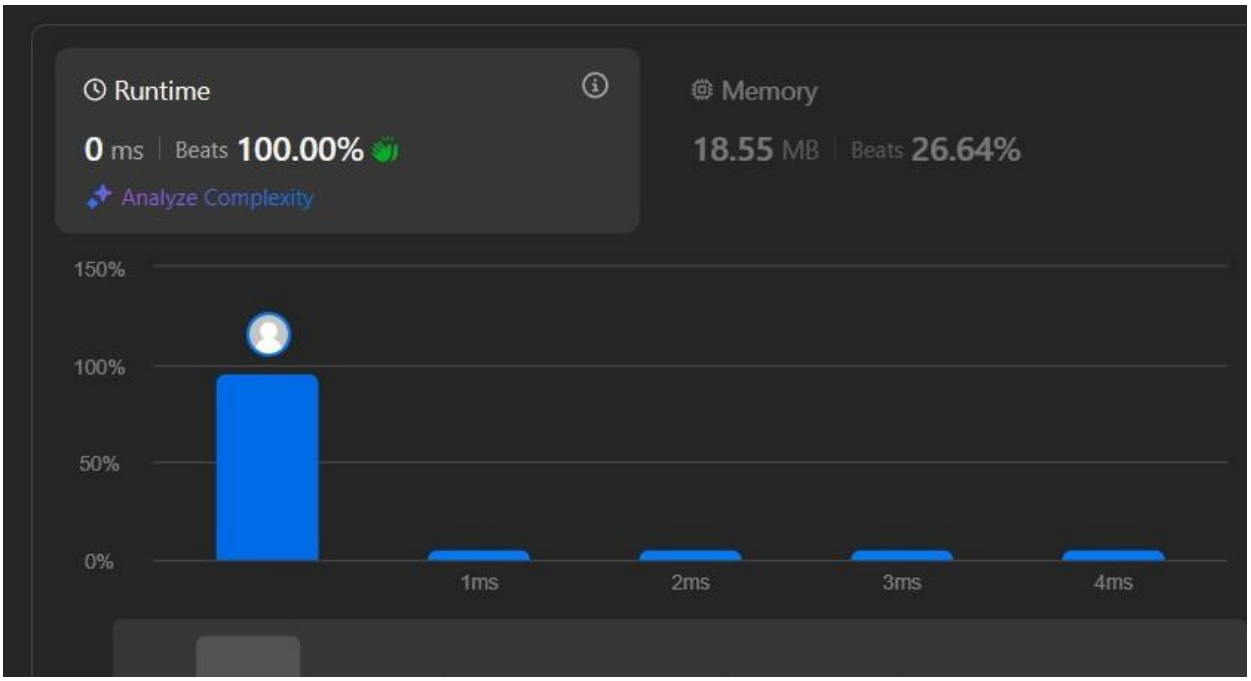

EXPERIMENT 6

Problem 4

AIM: Binary Tree Level Order Traversal

CODE:

```
class Solution
{ public:
   vector<vector<int>> levelOrder(TreeNode* root)
      { vector<vector<int>> result;
      if (!root) return result;

      queue<TreeNode*> q;
      q.push(root);

      while (!q.empty()) {
         int levelSize = q.size();
         vector<int> level;

         for (int i = 0; i < levelSize; ++i)
            { TreeNode* node = q.front();
            q.pop();
            level.push_back(node->val);

            if (node->left) q.push(node->left);
            if (node->right) q.push(node->right);
         }
         result.push_back(level);
      }

      return result;
   }
};
```

EXPERIMENT 6

OUTPUT:

EXPERIMENT 6

Problem 5

AIM: Convert Sorted Array to Binary Search Tree

CODE:

```
class Solution
{ public:
   TreeNode* sortedArrayToBST(vector<int>& nums, int left, int right)
      { if (left > right) return nullptr;

      int mid = left + (right - left) / 2;
      TreeNode* node = new TreeNode(nums[mid]);
      node->left = sortedArrayToBST(nums, left, mid - 1);
      node->right = sortedArrayToBST(nums, mid + 1, right);

      return node;
   }

   TreeNode* sortedArrayToBST(vector<int>& nums)
      { return sortedArrayToBST(nums, 0, nums.size() -
      1);
   }
};
```

OUTPUT:

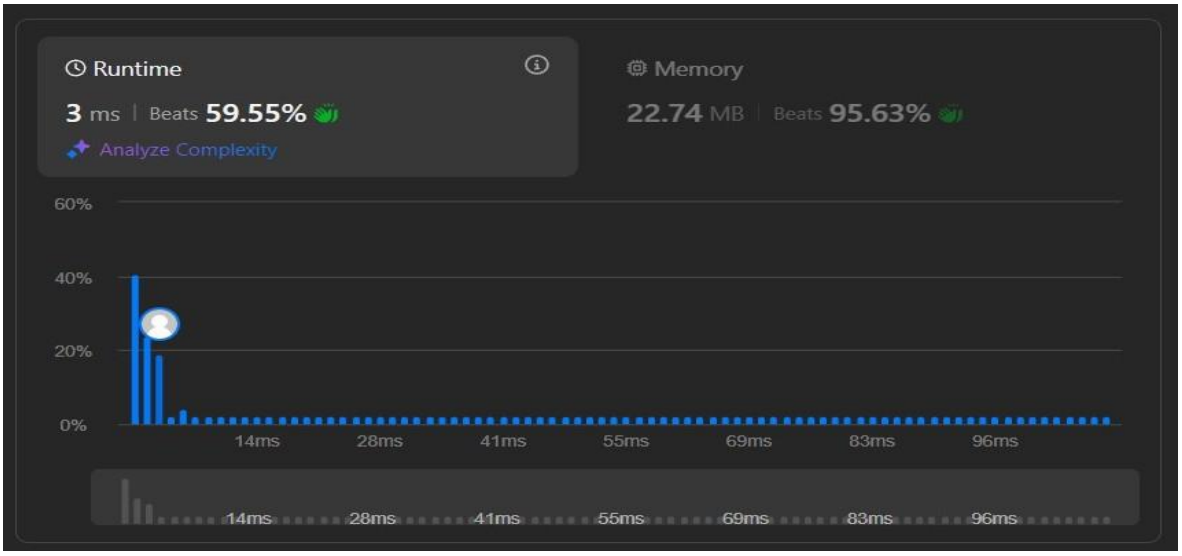

EXPERIMENT 6

Problem 6

AIM: Binary Tree Inorder Traversal

CODE:

```
class Solution
{ public:
    void inorderTraversalHelper(TreeNode* root, vector<int>& result)
        { if (!root) return;
        inorderTraversalHelper(root->left, result);
        result.push_back(root->val);
        inorderTraversalHelper(root->right, result);
    }

    vector<int> inorderTraversal(TreeNode* root)
        { vector<int> result;
        inorderTraversalHelper(root, result);
        return result;
    }
};
```

OUTPUT: